
fi-5950 Image Scanner

Operator's Guide



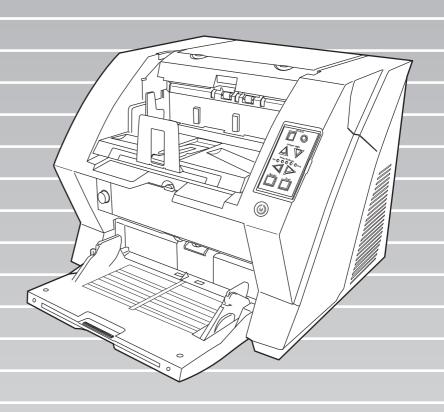

INTRODUCTION

Thank you for purchasing the fi-5950 Image Scanner.

The fi-5950 is an image scanner designed to scan various documents in large quantities. This document describes the basic operation methods to perform scanning by using ScandAll PRO. The version of ScandAll PRO bundled with this product is subject to change without notice, in which case the screenshots captured in this document may differ from the actual displayed image. For more information about ScandAll PRO, refer to the separate [ScandAll PRO User's Guide].

The fi-5950 has the following features.

Improvement of color scanning speed (105 sheets or 210 pages per minute) with high resolution (300dpi)

By the newly-developed high speed CCD and high speed image processing circuit, scanning speed (A4 color, 300dpi) of 105 sheets/210 pages per minute) is improved. Now you can scan a large amount of documents which is about 100,000 sheets a day!

■ Efficient pre-processing and post-processing!

This scanner is able to scan mixed documents stables of papers of different color, density, size and thickness. This makes the scanning process even simpler and economic, since you no not have to sort out the documents before scanning any more! Furthermore, this scanner is equipped with an "Elevator" Stacker, moving automatically into the appropriate height, according to the amount of loaded documents. This will make the documents be easily and elegantly handled and also increases your scanning efficiency!

■ Prevention of data loss because of improved multi feed detection

This scanner is equipped with ultrasonic multi feed detection sensors, which detect reliably the feeding of 2 or more documents together into the scanner. Those multi feed can also be detected surely, when scanning documents of different thickness, size, color or density. This will help you to increase your efficiency, since the data loss caused by multi feed is detected immediately. This gives you the opportunity to correct the scanning without too much troubles and loss of time.

■ High image processing function

The automatic detection function of this scanner is able to detect if the loaded documents are color or monochrome and according to the detection the appropriate settings will be automatically chosen for the image creation. Since the scanner does this automatically, you do not have to set the image settings each time before scanning.

■ Pre- and Post imprinter option can be installed

In today's document business, imprinters provide a vital tool for archiving, controlling and verification processes. For this scanner, you can select two optional types of imprinters, depending on your needs. The Pre-Imprinter Option prints information on the front side of the documents prior to the scanning. When using Pre-imprinter, the printed information will also be stored on the generated image. The Post-Imprinter on the other hand, will print after the scanning on the back sides of your documents. So only the originals, and not the images, will contain the imprint.

Centralized management of multiple scanners

The bundled "Scanner Central Admin Agent" application allows you to manage multiple scanners together, for example, to update the scanner settings and drivers, as well as to monitor the operating status of each scanner.

About this manual

The manual provides the following information.

1. NAMES AND FUNCTIONS OF PARTS

This chapter describes names and functions of parts.

2. BASIC OPERATIONS

This chapter describes basic scanner operations and basic document scanning.

3. SCANNING VARIOUS TYPES OF DOCUMENTS

This chapter describes how to scan various types of documents.

4. DAILY CARE

This chapter describes how to clean the scanner.

5. REPLACING CONSUMABLES

This chapter describes how to replace consumables.

6. SOLVING COMMON PROBLEMS

This chapter describes how to remedy document jams, other trouble, and items to check before contacting the agent where you bought the scanner, and how to check device labels.

7. ADF DOCUMENT SPECIFICATIONS

This chapter describes documents that can be used with this scanner.

8. SCANNER SETTINGS

This chapter explains the how settings can be done for the scanner using the Software Operation Panel.

9. OPTIONS

This chapter describes the options available for this product.

10. SCANNER SPECIFICATIONS

This chapter lists the scanner specifications.

The "Getting Started" is supplied to this Scanner.

This guide contains necessary information for getting started the scanner, also read the Getting Started.

1. PREPARING THE SCANNER

This chapter describes how to prepare the scanner for use.

2. INSTALLATION OF THE SCANNER

This chapter describes how to install and connect the scanner, and how to install the scanner application.

We hope that this manual is useful in taking full advantage of the fi-5950 Image Scanner features.

Trademarks

Microsoft, Windows, Windows Server, Windows Vista, and SharePoint are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

ISIS is a registered trademark or trademark of EMC Corporation in the United States.

Kofax and VRS are either registered trademarks or trademarks of Kofax, Inc.

Other company names and product names are the registered trademarks or trademarks of the respective companies.

How Trademarks Are Indicated In This Manual

References to operating systems (OS) are indicated as follows:

Product	Indica	ntion
Windows® 2000 Professional	Windows 2000	Windows (*1)
Windows [®] XP Professional, Windows [®] XP Professional x64 Edition, Windows [®] XP Home Edition	Windows XP	
Windows Server® 2003 Standard Edition, Windows Server® 2003 Standard x64 Edition, Windows Server® 2003 R2 Standard Edition, Windows Server® 2003 R2 Standard x64 Edition	Windows Server 2003	
Windows Vista [®] Home Basic (32/64-bit), Windows Vista [®] Home Premium (32/64-bit), Windows Vista [®] Business (32/64-bit), Windows Vista [®] Enterprise (32/64-bit), Windows Vista [®] Ultimate (32/64-bit)	Windows Vista	
Windows Server [®] 2008 Standard (32/64-bit), Windows Server [®] 2008 R2 Standard	Windows Server 2008	
Windows [®] 7 Home Premium (32/64-bit), Windows [®] 7 Professional (32/64-bit), Windows [®] 7 Enterprise (32/64-bit), Windows [®] 7 Ultimate (32/64-bit)	Windows 7	
Windows Server® 2012 Standard (64-bit)	Windows Server 2012	
Windows [®] 8 (32/64-bit), Windows [®] 8 Pro (32/64-bit), Windows [®] 8 Enterprise (32/64-bit)	Windows 8	
Microsoft® Office SharePoint® Portal Server 2003	SharePoint Serv	/er
Microsoft® Office SharePoint® Server 2007		
Microsoft® SharePoint® Server 2010		

^{*1} Where there is no distinction between the different versions of the above operating system, the general term "Windows" is used.

Manufacturer

PFU LIMITED

International Sales Dept., Imaging Business Division, Products Group Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku, Kawasaki-shi Kanagawa 212-8563, Japan Phone: (81-44) 540-4538

© PFU LIMITED 2010-2013

■ Preface

Safety Precautions

The attached "Safety Precautions" manual describes important details for users to use this product safely and correctly. Read the Safety Precautions thoroughly before you start using this product.

Warning Indications Used In This Manual

This manual uses the following indications to ensure safe and correct use of this product, and to prevent possible danger and injury to the Operator and other persons.




This indication alerts operators to an operation that, if not strictly observed, may result in severe injury or death.



This indication alerts operators to an operation that, if not strictly observed, may result in safety hazards to personnel or damage to equipment.

Symbols Used In This Manual

This manual uses the following symbols in explanations in addition to warning indications.

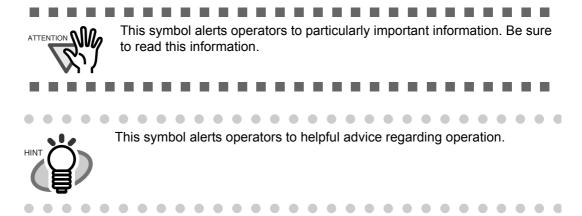

Screen Examples In This Manual

The screen examples in this manual are subject to change without notice in the interest of product improvement.

If the actual displayed screen differs from the screen examples in this manual, operate by following the actual displayed screen while referring to the User's Manual of the scanner application you are using.

The screen examples used in this manual are of the TWAIN driver, ISIS driver, and ScandAll PRO (image scanning application).

The Operator Panel Language Display

Apart from English, the operator panel can also display French, German, Italian, Spanish, and Chinese (Simplified). In this manual, the language display of the operator panel is shown in English.

CONTENTS

	Preface	
1	NAMES AND FUNCTIONS OF PARTS	1
	1.1 Names and Functions of Parts	
	1.2 Operator panel	5
2	BASIC SCANNER OPERATIONS	7
	2.1 Turning the Scanner ON /OFF	8
	2.2 Opening and Closing the Hopper	10
	2.3 Opening and Closing ADF	12
	2.4 Opening and Closing Top Cover	
	2.5 Setting the Hopper Height	
	2.6 Loading Documents on the Hopper	
	2.7 Setting up the Stacker	
	2.8 Using the Document smoother	
	2.9 Setting the Paper Thickness	
	2.10 Scanning Documents	
	2.12 Feeding Documents Manually	
	2.13 Configuring the Scan Settings	
	2.14 Before Using [Scan] / [Send to] button	
	2.15 Resuming from Power Saving Mode	
	2.16 Image Scanning Application	
	2.17 Centralized Management of Scanners	
_		
3	SCANNING VARIOUS TYPES OF DOCUMENTS	67
	3.1 Double Sided Scanning	
	3.2 Scanning Documents Longer than A3	
	3.3 Scanning Documents with different widths	
	3.4 Excluding a Color from the image (drop out color)	
	3.5 Skipping blank Pages	
	3.6 Scanning the Image Brighter	
	3.7 Detecting Multifeeds	
	3.8 Correcting skewed Documents	86
	3.9 Setting Auto Correction for Document Page	
	Orientations	88

	3.10 Multi Image Output	91
	3.11 Color/monochrome Auto Detection	94
	3.12 Not detecting Multifeed for fixed format	97
4	DAILY CARE	. 105
	4.1 Cleaning Materials and Areas Requiring Cleaning	106
	4.2 Cleaning the Pad	
	4.3 Cleaning the Rollers (using the cleaning sheet)	109
	4.4 Cleaning the Rollers (with a lint-free cloth)	112
	4.5 Cleaning the Transport path and the sensors	116
5	REPLACEMENT OF CONSUMABLES	121
	5.1 Consumables and Replacement Cycle	122
	5.2 How to check and reset the Consumable/Cleaning	
	Counter	123
	5.3 Replacing the Pad	127
	5.4 Replacing the Pick Roller	128
	5.5 Replacing the Separator Rollers	
	5.6 Replacing the Brake Roller	133
6	SOLVING COMMON PROBLEMS	. 135
	6.1 Clearing Document Jams	136
	6.2 Error messages of the Operator panel	
	6.3 Troubleshooting	142
	6.4 Before Contacting a Service Provider	155
	6.5 Labels on the Scanner	157
7	DOCUMENT SPECIFICATIONS	. 159
	7.1 Document Size	160
	7.2 Document Quality	
	7.3 Maximum Document Loading Capacity	
	7.4 Hole-punching Prohibited Areas	
	7.5 Multifeed Detection Conditions	
	7.6 Background Color Areas	168
	7.7 Job Separation Sheet	169
	7.8 Scanning Mixed Documents	170

8	SCANNER SETTINGS	173
	8.1 Scanner Settings	175
	8.2 Power saving setting	190
	8.3 Offset/Scan scale	191
	8.4 Multifeed Detection	193
	8.5 Multifeed detection when scanning in manual feed	
	mode	198
	8.6 Page Edge Filler (ADF)	199
	8.7 Dropout Color	201
	8.8 Pre-Pick	202
	8.9 Page Edge Filler	
	(Automatic Page Size Detection)	203
	8.10 Intelligent Multifeed Function	205
	8.11 Paper feeding retry times	206
	8.12 Retaining current paper thickness after Power off	207
	8.13 Cleaning Cycle	208
	8.14 Life counter setting	209
	8.15 Document clearance setting	210
	8.16 Thin Paper Mode	211
	8.17 Soft Pick Setting	212
	8.18 Paper Jam Detection	213
	8.19 AutoCrop Boundary	214
	8.20 Auto Color Detection	215
	8.21 Alarm Setting	216
	8.22 Jam Detection Outside of Scannable Area When	
	Transporting paper	217
	8.23 Imprinter Selection	218
	8.24 Timeout for Manual Feeding	219
	8.25 Scan Setting for Document with Tab	220
	8.26 Paper Stop Position at Multifeed Error	221
	8.27 Overscan Control	222
9	OPTIONS	225
	9.1 Options	226
	9.2 fi-590PRF (Pre-imprinter)	
	9.3 fi-590PRB (Post-imprinter)	
	9.4 Other Ontions	229

10	SCANNER SPECIFICATIONS231		
	10.1 Basic Product Specifications	232	
	10.2 Installation Specifications	234	
	10.3 Dimensions	236	
INDEX		IN-1	

1 NAMES AND FUNCTIONS OF PARTS


This chapter describes names and functions of various parts of the scanner.

1 Names and Functions of Parts2
2 Operator panel5

1.1 Names and Functions of Parts


This section describes the names of parts.

■ Front side

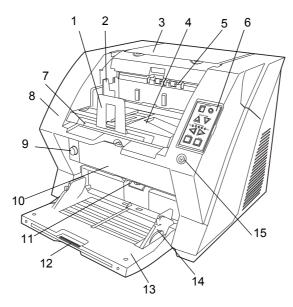


No.	Name	Function
1	Stopper	Prevents ejected documents from dropping off the scanner.
2	Stacker side guide	For aligning ejected documents to a certain width.
3	Top cover	Cover to access the consumables storage box and Post-Imprinter option (sold separately).
4	Stacker	Documents will be ejected into the Stacker after scanning.
5	Ejector	For ejecting the documents after scanning.
6	Operator panel	For operating the scanner.
7	Stacker extension	For scanning long documents. Pull the extension out according to the document's length.
8	ADF cover	Open the cover for cleaning the inner parts of the ADF or for replacing consumables.
9	ADF cover open button	Button used to open the ADF
10	Pre-imprinter cover	For the Pre imprinter option
11	ADF (Automatic document feeder)	The documents loaded onto the Hopper will be fed sheet by sheet for scanning.
12	Hopper extension	Pull the Hopper extension out for loading long documents.
13	Hopper	Documents to be scanned are loaded onto the Hopper.
14	Hopper side guides	Sheet Guides used to make sure that the paper to be scanned is fed into the scanner straight, avoiding skew.
15	Power button	Switch the scanner ON&OFF.

■ Rear side

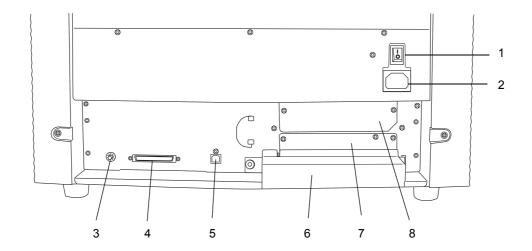

No.	Name	Function
1	Main power switch	For switching the power supply ON/OFF.
2	Power connector	For connecting the AC cable.
3	SCSI ID Switch	Sets the scanner's SCSI ID.
4	SCSI connector	For connecting the SCSI cable.
5	USB connector	For connecting the USB cable.
6	Extended memory slot	For connecting an extension memory (sold separately). For details see section 9.4.
7	VRS Board (optional) slot	For connecting the VRS board (optional) to use Kofax VRS (optional). For details, refer to "9.1 Options" on page 226.
8	Extended slot	A spare slot for a third party board


■ Removable Parts

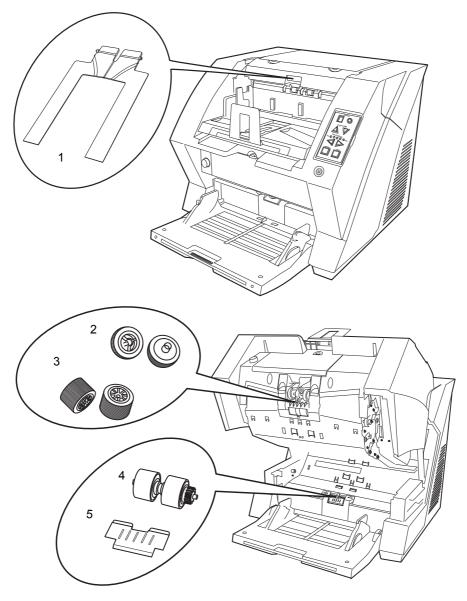

No.	Name	Description
1	Document smoother	Attached when the stacker position is set to align the ejected document by the leading edge (see page 24), or when scanning documents with different widths (see page 72).
2	Pick Rollers	Rollers that pick the paper from the hopper into the ADF. This is a consumable item.
3	Separator rollers	Roller used to help separate the paper as the feeding begins. This is a consumable item.
4	Brake rollers	Roller used to help separate the paper as the feeding begins. This is a consumable item.
5	Pad	Separation Pad used to help separate the paper as the feeding begins. This is a consumable item.

1.2 Operator panel


The operator panel is located on the right side of the scanner. The panel consists of a Function Number Display, buttons and LEDs.

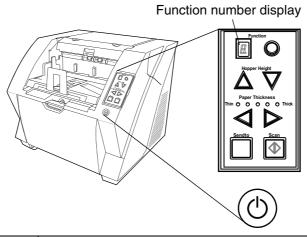

Name	Function
Function Number display and Function button	Shows the status of the scanner. For details, refer to "Indications on the Function Number Display" (page 6).
Hopper height adjustment button	Use these buttons to adjust the height of the Hopper to the Upper/Middle/ Lower Positions. The hopper moves automatically to the right position after recieving a scanning command. However, this may cause a delay before the actual scanning starts. To avoid unnecessary waiting time, it is recommended to set the hopper height prior to scanning. For details, refer to "2.5 Setting the Hopper Height" on page 15.
Document thickness adjustment button Paper Thidness Thin O O O O Thick	Use this buttons, to set the paper thickness of the documents. (Normally no need to change from the default setting) For details, refer to "2.9 Setting the Paper Thickness" on page 29.
[Send to] button	Use this button to start linked application. When this button is pressed at manual feed mode, the scanning stops immediately. (* About the settings, refer to section "2.14 Before Using [Scan] / [Send to] button" on page 60, or the TWAIN Driver help.)
[Scan] button	Use this button to start linked application. When this button is pressed during scanning operation, the scanning is cancelled. (* About the settings, refer to section "2.14 Before Using [Scan] / [Send to] button" on page 60, or the TWAIN Driver help.)
Power button	Use this button to turn the power ON/OFF. When the power is turned on, the button is illuminated in blue.



Operator Panel Overlays sheets in French, German, Italian, Spanish and Chinese (Simplified) are provided with the scanner. To change the overlay, open the plastic cover of the Operator Panel.



■ Indications on the Function Number Display

The following shows the indications on the Function Number Display.

No.	Descriptions
B	Lights only one time upon turning on the scanner.
P	Indicates that the scanner has been turned ON and is being initialized.
1	Indicates that initialization has been completed successfully. This status is called "Ready Status".
or	Indicates that a temporary error (that users can solve) has occurred during the initialization or scanning of documents. "J" or "U" and an error number (1, 2, 4, 6, 8, 0) are displayed alternately. To return the scanner to the ready status ("1"), press the "Scan" or "Send to" button while the error is indicated.
E	Indicates that a device alarm (that users can not solve) has occurred during the initialization or scanning of documents. "E" and an alarm number (0, 2 to 9, and A, c, d, F, 10 to 12, 15 to 19, 1A, 1b) are indicated alternately. To return the scanner to the ready status ("1"), press the "Scan" or "Send to" button. If this alarm occurs, turn the power off and then on again. If the alarm is indicated after turning on the power again, contact your service engineer.

2 BASIC SCANNER OPERATIONS

This chapter describes basic scanner operations.

This chapter explains operations using the screens of Windows XP. Depending on your OS, your PC's screen shots and the operation may be different from this manual. Be aware that when the TWAIN driver, or the ISIS driver is updated, the screens and operations noted in this chapter may be changed slightly. In this case, refer to the User's Guide provided with the update.


2.1 Turning the Scanner ON /OFF8	
2.2 Opening and Closing the Hopper10	
2.3 Opening and Closing ADF12	
2.4 Opening and Closing Top Cover14	
2.5 Setting the Hopper Height15	
2.6 Loading Documents on the Hopper17	
2.7 Setting up the Stacker22	
2.8 Using the Document smoother27	
2.9 Setting the Paper Thickness29	
2.10 Scanning Documents30	
2.11 Starting Scanning with Button35	
2.12 Feeding Documents Manually36	
2.13 Configuring the Scan Settings43	
2.14 Before Using [Scan] / [Send to] button60	
2.15 Resuming from Power Saving Mode62	
2.16 Image Scanning Application63	
2.17 Centralized Management of Scanners64	

2.1 Turning the Scanner ON /OFF

Turning the Power ON

When SCSI interface is used, turn on the scanner power first. Turn on the ATTENTION N PC when the scanner displays "1" on the Function number display.

1. Press "I" side of the main power switch located on the back of the scanner.

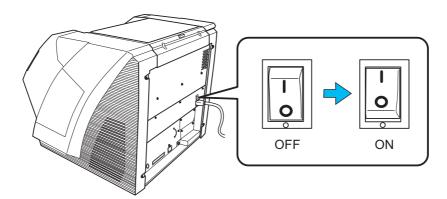

2. Open the Hopper.




- Refer to "2.2 Opening and Closing the Hopper" on page 10 to open the
- Be sure to open the Hopper before turning on the scanner by the Power

3. Press the Power button on the Operator panel.


The power turns on and the Power button lights up.

During initialization, the Function No. Display changes from "8" --> "P" to "1" in order. When "1" shows, it means the scanner is ready.

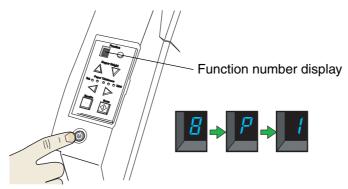

■ Turning the Power OFF


Hold the Power button for at least two seconds.



⇒ The Power button light goes off and the scanner becomes disconnected.




If the scanner will not be used for an extended period, turn off the scanner's main power switch on the back and unplug the power cable.

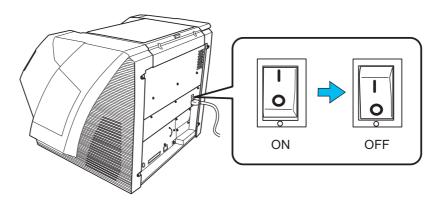


2.2 Opening and Closing the Hopper

■ Opening the Hopper

1. Hold the centrer of the upper part of the Hopper.

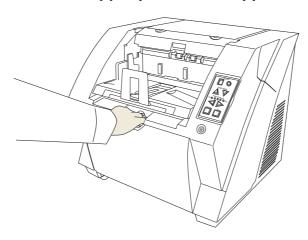


2. Flip down the Hopper gently.

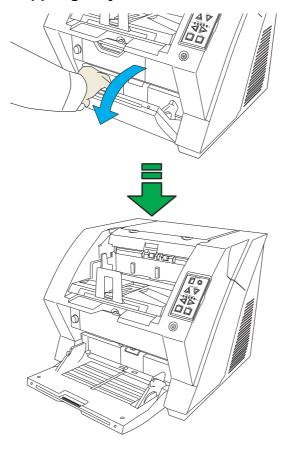

■ Closing the Hopper


- 1. Remove the document if there is any on the Hopper.
- 2. Slide the extension in the Hopper.

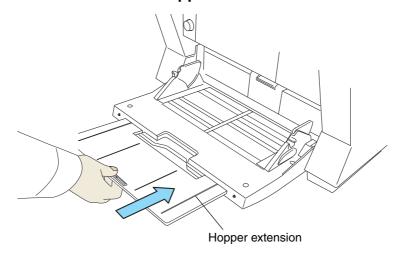

3. Restore the original position of the hopper if the height of Hopper is adjusted.

Lower the hopper to the bottom by pressing the ∇ button. (Refer to "2.5 Setting the Hopper Height" on page 15)


4. Close the Hopper.

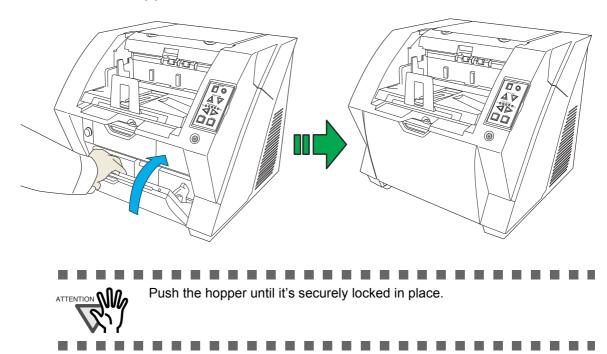


2.3 Opening and Closing ADF

■ Opening ADF


1. Remove the document if there is any on the stacker.

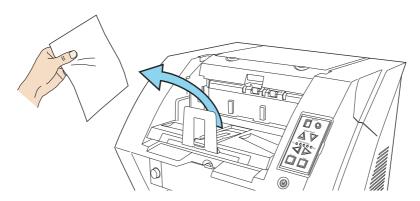

2. Press the ADF cover open button.

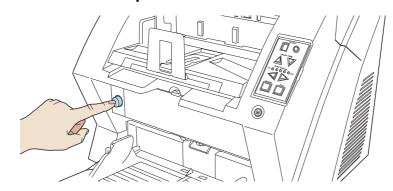


 \Rightarrow The cover is slowly opened.

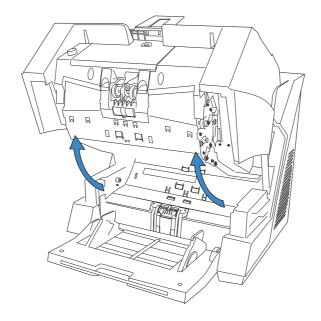

■ Closing ADF

1. Hold the ADF cover with both hands and press it down slowly.

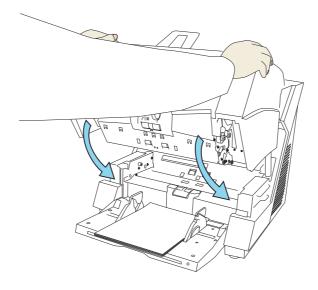

Press the ADF cover until it is fixed.




- When closing the ADF, make sure that nothing is left inside the ADF.
- Be careful not to have your fingers caught.

2.4 Opening and Closing Top Cover

Under the Top cover, there are a storage tray for storing the consumables and cleaning goods and a space for installing the Post-Imprinter. When you use the tray or access the Post-Imprinter, open the top cover as follows


■ Opening the Top Cover

Press the tabs of the Top cover and open the top cover.

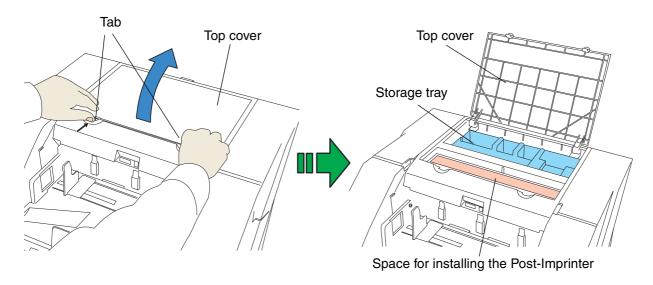

■ Closing the Top cover

Close the Top cover and press lightly until it is fixed with the tab.

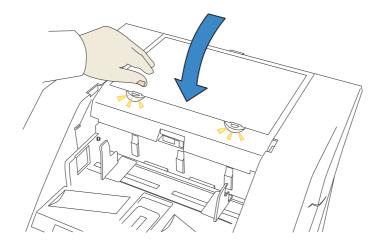

2.5 Setting the Hopper Height

When there is no alarm (the function number display is showing "1"), the Hopper height can be adjusted. When the scanning load is not very heavy, setting the hopper higher will shorten the time it moves to the feeding position.



- Do not touch the hopper when it is being adjusted. Your finger(s) may be pinched.
- Do not load anything onto the hopper when it is moving. If something gets into the mechanism, the scanner may be damaged.
- Do not place anything under the hopper. The hopper may collide with it and become damaged.
- Do not press the [Hopper Height] button ($\triangle \nabla$) when the hopper is closed. The hopper may be damaged.

Adjustment is not possible when:

- •The scanner is scanning
- •The hopper is closed.
- •When using Software Operation Panel (see page 175).


Three hopper heights are available and the corresponding capacities are as follows.

High: Up to 100* sheets

Middle: Up to 300* sheets

Low: Up to 500* sheets


*: Estimated using paper of 80g/m² (20lb).

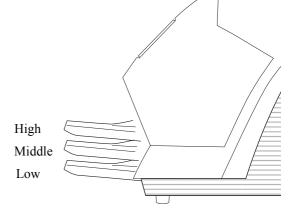




Depending on the thickness of the document, the loading capacity differs. Refer to "7.3 Maximum Document Loading Capacity" on page 164.

The adjustment is done by using the Operator Panel on the scanner.

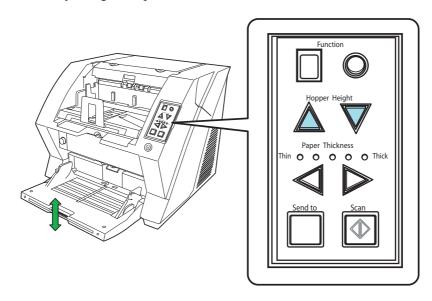

When you press the \triangle button, the hopper is raised one step higher.(Low \rightarrow Middle \rightarrow High) When pressing the ∇ button, the hopper is lowered one step lower.(High \rightarrow Middle \rightarrow Low)



Immediately after the scanner is turned on, the Hopper is initially set to Low.

16

2.6 Loading Documents on the Hopper

■ Preparing the Document

1. Align both edges of the documents.




For how to scan the document with different widths, refer to "3.3 Scanning Documents with different widths" on page 72.


.

2. Fan the documents.

- 1) Take a stack of documents about 15mm to 20mm thick (1/2 to 3/4 inch).
- 2) Hold both ends and bend the documents into an arch.



3) Firmly holding the document with both hands, bend back the document as follows so that the bent section rises up in the middle of the document as follows.



- 4) Repeat steps 1) to 3) for a few times.
- 5) Rotate the document 90 degrees, and fan again.
- 3. Align the leading edges of the documents.

■ Setting the Document


There are 2 ways to set documents on the hopper.

- (1) Set the document at the center of the hopper (mainly for document of equal size pages).
- (2) Set the document by either side of the hopper (mainly for document of different size pages, or you want to align the document by the side instead of the center line).

(1) Setting the document at the center of the hopper

1. Load the document on the hopper.


Place the document face-up on the hopper.

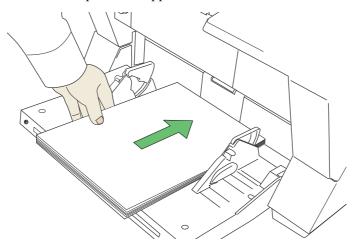

2. Adjust the Side guides to the document width.


Pressing the lock lever, slide the Side guides so that they contact the document sides.

If there is space between the document edges and the guides, the scanned images may be skewed.

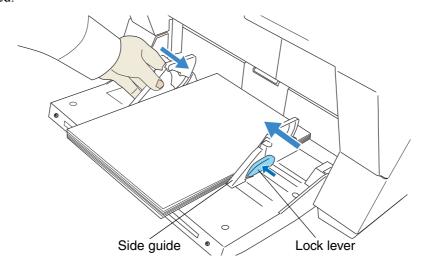



- Make sure that the document stack does not exceed the maximum height mark on the inner side of the Side guides.
- For long documents, use the hopper extension.

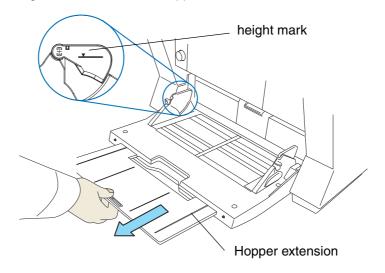


3. Start the scanner application and scan the document.

For the details on how to scan using ScandAll PRO, refer to "2.10 Scanning Documents" on page 30.

(2) Setting the document by either Side Guide of the hopper.


For scanning documents with pages of different sizes, see section "7.8 Scanning Mixed Documents" on page 170.

1. Move the hopper side guides to their outermost positions.

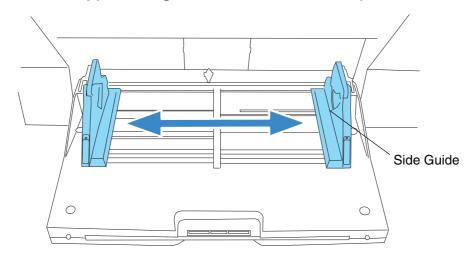


2. Lock the side guide not to be used.

Flip up the lock switch on the front side of the side guide to lock it.

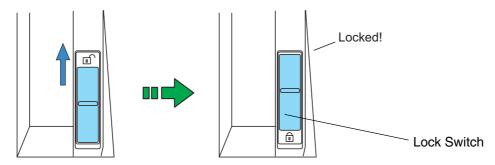


3. Move the other side guide to the desired position while pressing down the lock lever.

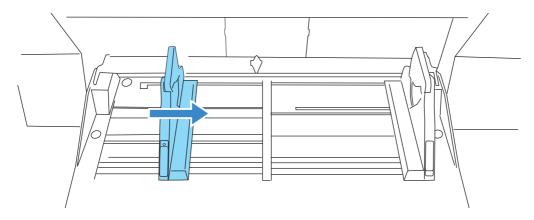


4. Set the document against the side guide.

Set the documents with the front side (scanning side) facing up.

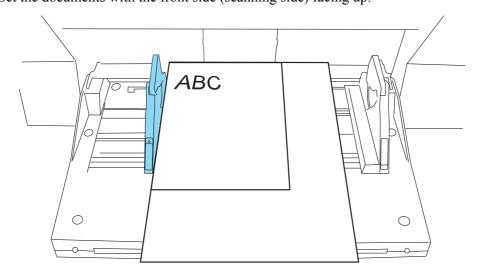



Make sure that all the pages fall under the pick roller. (Otherwise they will not be picked)

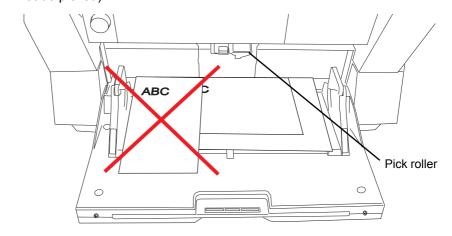


5. Start the scanner application and scan the document.

For the details on how to scan using ScandAll PRO, refer to "2.10 Scanning Documents" on page 30.




If you want to unlock side guides, follow the steps below:

1.Release the locked side guide by flipping down the switch.

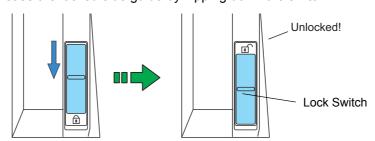

2. Move both side guides toward the center while pressing the lock lever.

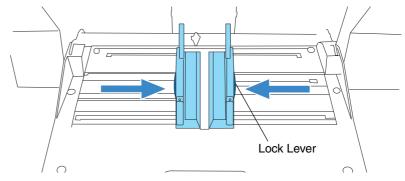

- 3.Release the lever.
 - ⇒ Now the two sides will move symmetrically as before.

2.7 Setting up the Stacker


The document set on the hopper, once scanned, will be ejected onto the stacker.

You can adjust the inclination of Stacker table to align the leading edge of document or not. Also you can fix the height of Stacker table for thin paper stacking.

Set up the Stacker by adjusting the Stacker extension, Stopper, Side Guides and Stacker's inclination.

■ Stacking the document

1. Pull out the stacker extension in accordance with document length.

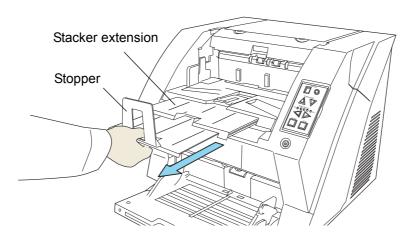




- Do not use the stopper to pull out the stacker extension. It may be damaged.
- Be sure to extend the stopper longer than the document.



For short documents, use the small stopper.


.

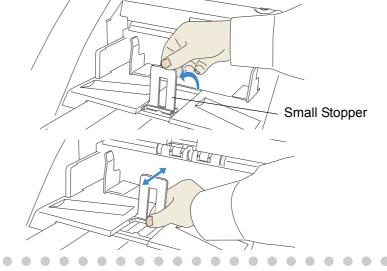




When scanning long pages (longer than A3), the document may be longer than the stacker extension even if it's pulled to the outermost position. In case like this, place a thick paper about the size of A4 on the stopper and make a slope as depicted below.

• • • • • • • • • • • • • • • • • • • •

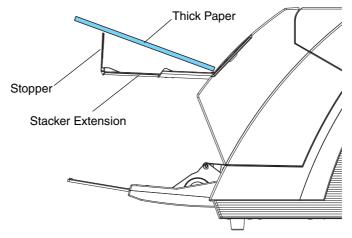

(The scanner can scan document up to 3,048mm (120inch) long. Refer to "7.1 Document Size" on page 160.)

2. Adjust the stacker side guides to the document width.

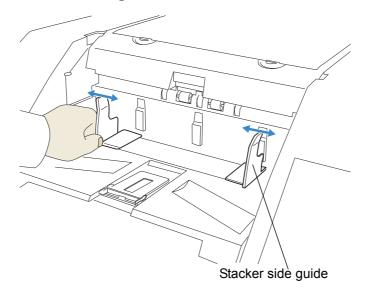




Be sure to set the stacker side guides a little wider than the document width.


■ Changing Stacker inclination/motion

The location of the stacker can be switched when ejecting documents by fixing the stacker height in the appropriate position, or by using either the horizontal setting for bottom edge alignment or the tilting forward setting for leading edge alignment. The factory default is set to the horizontal setting. When using the tilting forward setting for leading edge alignment, follow the procedure below to switch the position of the stacker.

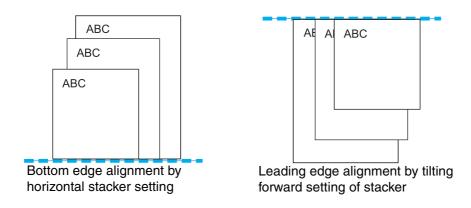

<Switching to the tilting forward setting>

- 1. Slide the stacker out towards you.
- 2. Push down the part of the stacker which is closer to you.

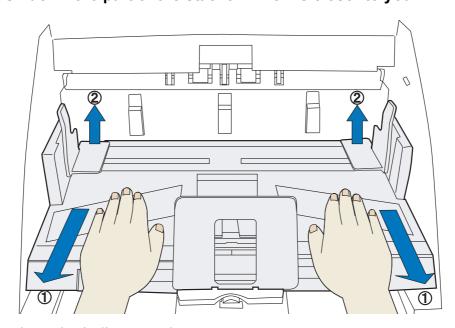

 \Rightarrow The stacker inclines towards you.

3. Move your hands away from the stacker slowly.

⇒ The stacker will be fixed in a position tilting forward.



- When set to "Bottom edge" position, the stacker does not move up or down and becomes immovable even during scanning operation.
- In this position, the stacker's maximum load will be 200 sheets.
- If the pages do not stack well, use the Document Smoother. ("2.8 Using the Document smoother" on page 27)




When you align the documents from the leading edge (by tilting forward setting of stacker), the documents must meet the following conditions:

$$(Length) \div (Width) < 1.5$$

<Switching back to the horizontal setting

- 1. Slide the stacker out towards you.
- 2. Push down the inner part of the stacker.

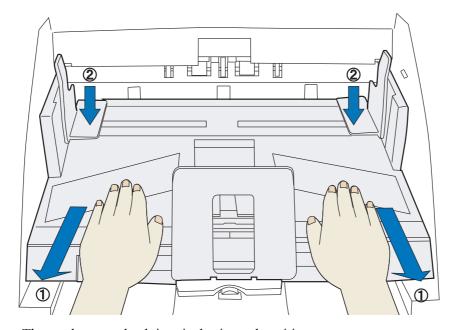

⇒ The stacker goes back into its horizontal position.

3. Move your hands away from the stacker slowly.

⇒ The stacker will be fixed in a horizontal position.




• When set to the "bottom edge alignment" position, the stacker will automatically adjust its height according to its load.

• • • • • • • • • • • • • • • • • •

• When set to the "Bottom edge alignment" position, the stacker's maximum load will be 500 sheets.



 On both sides walls of the stacker, photo sensors are installed to detect document height on the stacker. Make sure these sensors are not blocked.

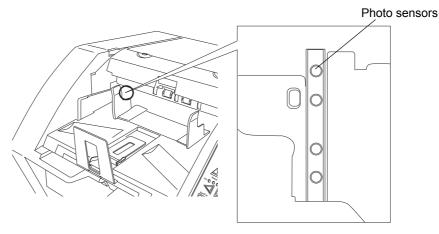

• The stacker may move up or down when the scanner is in the ready status up or when scanning starts. Do not touch the stacker or place anything on it at those times.

<Changing Stacker table motion>

Thin paper sometimes curles when it is ejected to the stacker. This method may be effective to improve the stacking capability by fixing the stacker hight in the appropriate position.


- 1. Close the scanner driver dialog box if it is displayed on the PC monitor.
- 2. Press both Hopper Height buttons on operator panel (\triangle and ∇) for more than 2 seconds.
 - ⇒ Every time this is done, the stacker table moves between the lowest position and the position little a bit above. Set the stacker table at the position little a bit above the lowest position.

2.8 Using the Document smoother


The ejected document may not stack correctly when the stacker's angle is adjusted to the tilting forward setting (see page 24), or when scanning document of different size pages (see page 72). If that is the case, install the Document Smoother as described below.

The Document Smoother will suppress the splattering of ejected pages so they will stack correctly.

1. Prepare the Document Smoother.

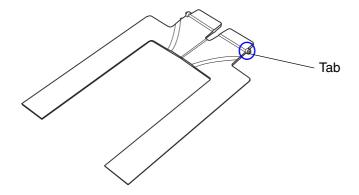


2. Insert one of the tabs into the slit in the scanner.

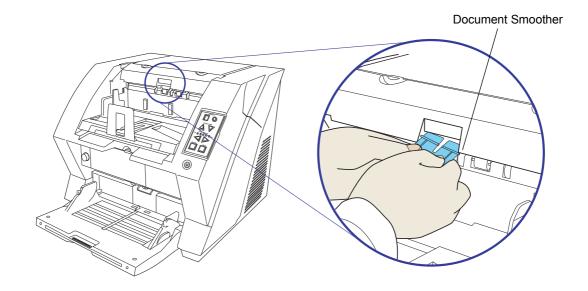

3. While bending the center part, insert the other tab into the scanner slit.


 \Rightarrow It will look like this when installed.

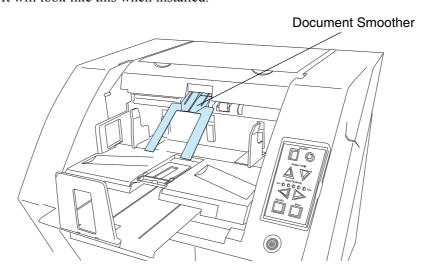

2.9 Setting the Paper Thickness

When multifeeds or paper jam occurs frequently, adjust the paper thickness by using the Paper Thickness button on the operator's panel. (Under normal circumstances, use the default setting.)

Set the paper thickness on the Operator Panel.

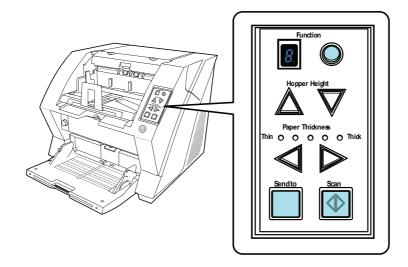

When pressing the \rightarrow button, the scanner is set for one level thicker document.

When pressing the \leq button, the scanner is set for one level thinner document.

The following five (5) steps of document thickness are selectable.

l hin	I hick

•OOOO: Thin

↑ Prevent picking failure and paper jam

○●○○○: Medium thin

OO●OO: Medium (Documents with thickness of 52 through 127g/m²) < Default setting>

OOO●O: Medium thick

OOOO●: Thick ↓ Prevent multifeeding



- When multifeeds occur frequently, set the thickness level thicker.
- When picking failure or paper jams frequently occur, set the thickness level thinner.
- Multifeeds, picking failures and paper jams can also occur due to worn-out
 of the consumables and dirt of the rollers. When such problems are not
 cleared, change the consumables or clean inside of the scanner.

2.10 Scanning Documents

This section explains about the basic flow of scanning operations.

In order to use the scanner to scan documents, you need a scanner driver and an application that supports the driver.

This product bundles the TWAIN driver and the ISIS driver (compliant to the respective standards), and an application called "ScandAll PRO" which supports both drivers.



- For details about the scanner drivers, refer to the following:
- "2.13 Configuring the Scan Settings" on page 43
- TWAIN Driver Help
- ISIS Driver Help
- For details about ScandAll PRO, refer to the following:
- ScandAll PRO User's Guide
- ScandAll PRO Help
- Load the documents on the hopper.

Refer to the section "2.6 Loading Documents on the Hopper" on page 17.

2. Adjust the stacker table to the document size.



- When loading long documents on the hopper, extend the stacker extension.
- When loading short documents on the hopper, adjust the stacker length with the small stopper.


3. Start up the application to use for scanning.

ScandAll PRO will be used here as an example to explain the procedure.




For information on how to launch ScandAll PRO, refer to "ScandAll PRO User's Guide".


4. Select a scanner driver to use for scanning.

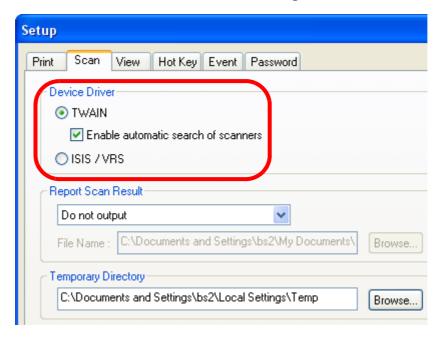

5. Select a scanner.

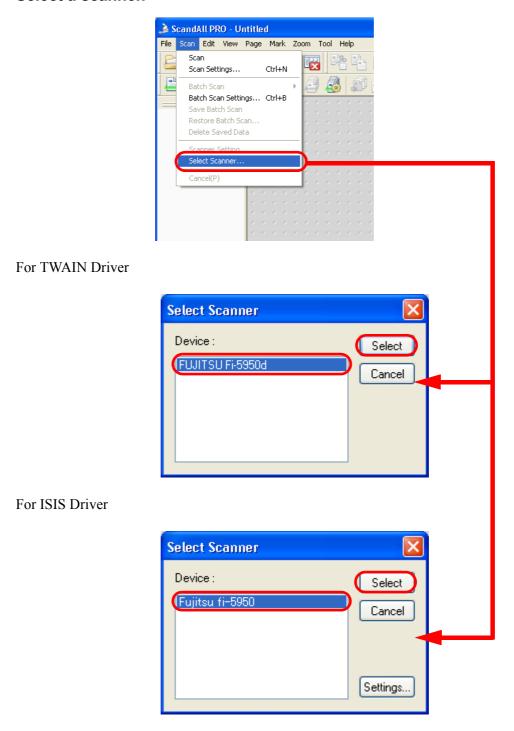


6. Launch a scanner driver from the application.

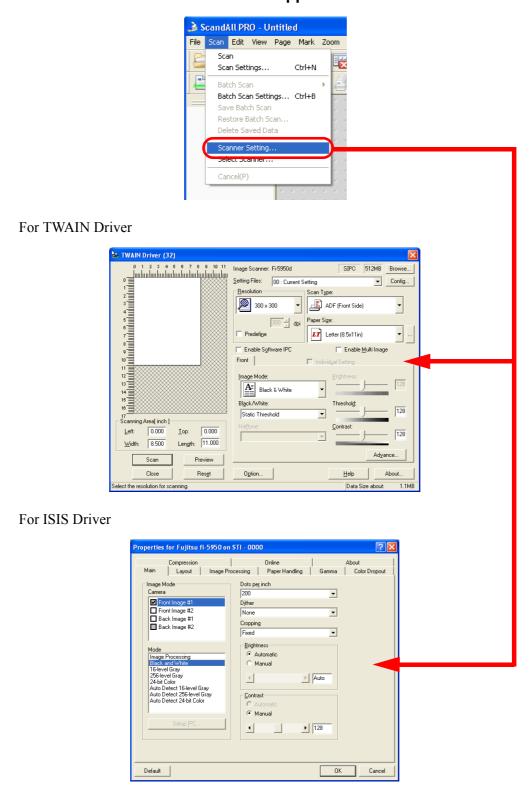

- 7. In the scanner driver's setup dialog box, configure the scan settings.
- 8. Perform a scan.

For information on how to scan using ScandAll PRO, refer to "ScandAll PRO User's Guide".

9. Save the scanned images in a file.



Procedures and operations slightly vary depending on the application used. For details about how to scan using ScandAll PRO, refer to "ScandAll PRO User's Guide".

To perform scanning with other applications, refer to the manual bundled with the application.

2.11 Starting Scanning with Button

Pressing the [Scan] / [Send to] button can start an application previously linked. However, you need to set the application for [Scan] and [Send to] button referring to "2.14 Before Using [Scan] / [Send to] button" on page 60.

1. Load the documents on the hopper.

Refer to the section "2.6 Loading Documents on the Hopper" on page 17.

2. Adjust the stacker table to the document size.


Refer to "2.7 Setting up the Stacker" on page 22.

3. Press the [Scan] or [Send to] button.

When using the [Scan] button, press the button.

When using the [Send to] button, you can set from [Send to 1 to 9] of nine (9) kinds of settings.

Each pressing the [Function] button increases the number of Function Number display as $1 \rightarrow 2 \rightarrow 3...$ Set the number that links the application software you want to use for scanning and press the [Send to] button.

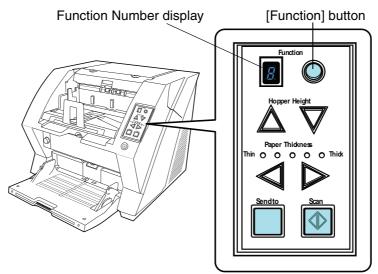

⇒ The application previously set for the number is started.



If the [Send to] button is pressed when "C" is displayed in the Function Number Display, the Software Operation Panel will start (see page 175).

2.12 Feeding Documents Manually

Besides the "Automatic Feed Mode" which automatically scans the document set on the hopper, the scanner can also scan documents in the "Manual Feed Mode". In addition, the "Manual Feed Mode" is divided into 2 types:

<1> Single Feed: Only one sheet is manually fed and scanned. This is suitable for

- •thick paper, envelopes and folded paper and other types of documents that are difficult to scan using Automatic Feed Mode. (In case of folded paper, make the folding line as the leading edge).
- •reducing the load on the hopper.
- •making sure a certain page is scanned.

<2> Continuous Feed: Multiple sheets of document are manually fed one at a time and continuously scanned. This is suitable for


- •manual feed, even if multiple sheets are mistakenly fed, the scanner will scan one at a time.
- selectively scanning a stack of document.
- •making sure certain pages are scanned.

The procedure is described below.

■ Single Feed

1. Lift up the Pick roller unit.

Lift up the small plate on the left side using your finger.

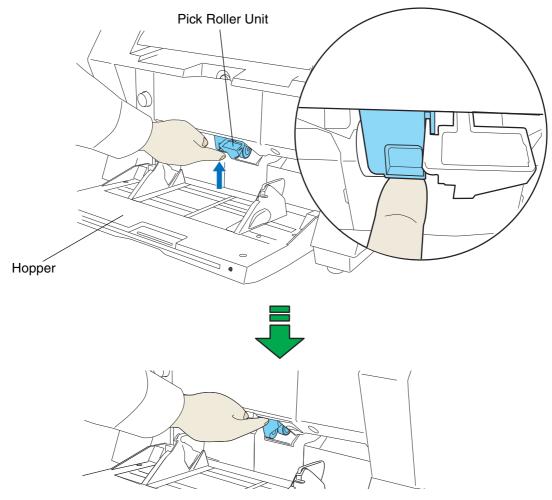

- ⇒ The Pick roller unit will click into place.
- \Rightarrow The hopper will move up to the manual feed position.



- If there is any document loaded on the Hopper, remove it before adjusting.
- Be careful not to get your fingers or anything caught in the mechanism when the hopper table moves up.

2. Place documents face-up at the center of the hopper table.

At this moment, do not stick the top edge of the document against the inner side of the hopper, instead set them a bit apart.


3. Start the application and display the scanner driver screen.

Set the scanning condition.

For the information about how to run the scanner driver, refer to "2.10 Scanning Documents" on page 30.


4. Start scanning.

When using the TWAIN driver, click the [Scan] button on the following screen.

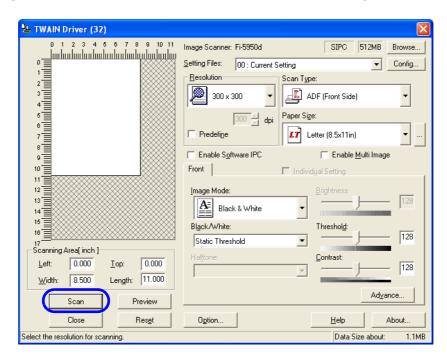

5. Insert the document until the top edge touches the rollers on the inside.

When more than one sheet is loaded, only the one on the top of the stack will be fed.

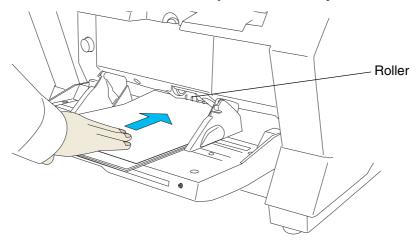

⇒ The document is picked up and ejected onto the stacker after scanning.

6. Repeat the procedure 5 until all the documents are scanned.


After a certain time period of inactivity or at pressing of [Send to] button, the scanner will recognize it as "no document" and stop scanning.



For setting the timeout for feeding the document manually, refer to section "8.24 Timeout for Manual Feeding" on page 219.

7. To deactivate "Manual Feed Mode" (Single Feed), return the Pick roller unit to its original position.

Flip down the small plate on the left using your finger.

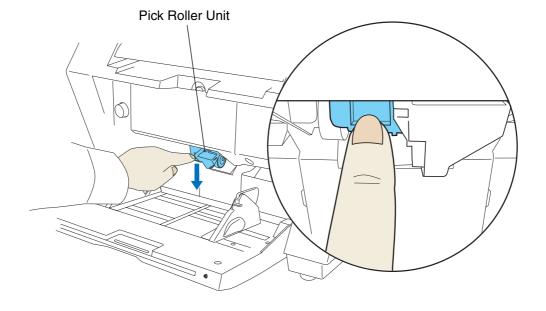


■ Continuous Feed

1. Open the hopper if it is closed.

Refer to section "2.2 Opening and Closing the Hopper" on page 10.

2. Press down the Hopper Height Button (\triangle) on the Operator Panel for more than 3 seconds.

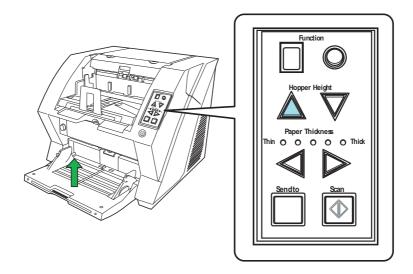

 \Rightarrow Hopper will move up to the manual feed position.



- Be careful not to get your fingers or anything caught in the mechanism when the hopper table moves up.
- To deactivate the "Manual Feed Mode" (Continuous Feed) in the middle of an operation, press down the Hopper Height Button (♥) on the Operator Panel for more than 3 seconds.

3. Place documents face-up at the center of the hopper table.

At this moment, do not stick the top edge of the document against the inner side of the hopper, instead set them a bit apart.


4. Start the application and display the scanner driver screen.

Set the scanning condition.

For the information about how to run the scanner driver, refer to "2.10 Scanning Documents" on page 30.


5. Start scanning.

When using the TWAIN driver, click the [Scan] button on the following screen.

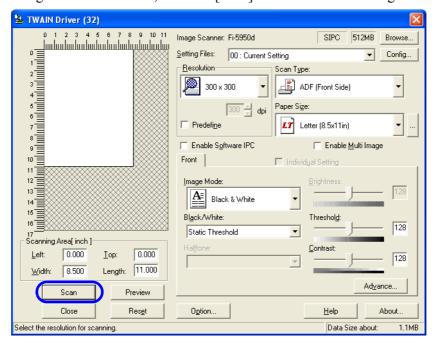

6. Load the documents towards the back of the hopper.

When more than one sheet is loaded, only the one on the top of the stack will be fed.

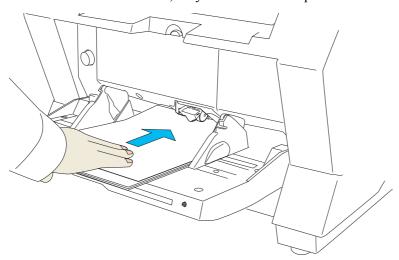


⇒ The document is picked up and ejected onto the stacker after scanning.



In "Manual Feed Mode" (Continuous Feed), even if multiple sheets are mistakenly fed, the scanner will scan only one sheet at a time.

- 7. Repeat the procedure 6 until all the documents are scanned.
 - ⇒ After a certain time period of inactivity or at pressing of [send to] button, the scanner will recognize it as "no document" and stop scanning.



For setting the timeout for feeding the document manually, refer to section "8.24 Timeout for Manual Feeding" on page 219.


To deactivate the "Manual Feed Mode" (Continuous Feed), press down 8. the Hopper Height Button (∇) on the Operator Panel for more than 3 seconds.

2.13 Configuring the Scan Settings


TWAIN Driver

The TWAIN driver is a software driver that conforms to the TWAIN standard. This driver can be used with an application that supports TWAIN to perform scanning.

Normally, the scanner driver is launched via an application, and then the scan settings are configured in the setup dialog box of the driver (some applications may not display the setup dialog box).



Ways to launch the scanner driver differ depending on the application. For more details, refer to the manual or the Help files of the application.

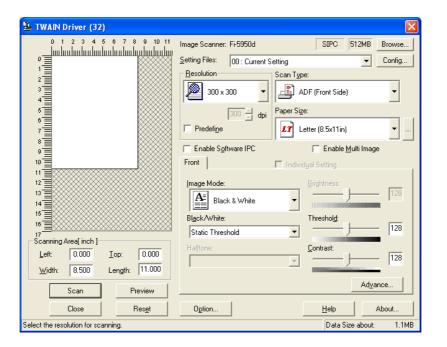

Main screen

You can perform settings for the TWAIN Driver on this window.

The following describes the main setting items.

•For details on each functions, refer to "TWAIN Driver Help" (appears by pressing [Help] or [F1] button).

Resolution

Specifies the resolution of scanning.

It can be specified by selecting a default value from the list or customizing (specifies any resolution in 1 dpi unit, within a range of 50 to 600 dpi).

By marking the [Predefine] checkbox, you can select one from three predefined settings as [Normal], [Better], [Best] to scan documents instead of setting details by yourself.

Otherwise, you can change the details of the predefined settings on the [Resolution Setting] window, which appears when you click on the [...] button.

Scan Type

Specifies the feeding method, the side(s) to be scanned (Front Side, Back Side, Duplex) or details of Long page (Front Side, Duplex) details of Long page (Front Side, Duplex) *.

* Refers to documents larger than Double Letter (11×17 in.)/A3.

Paper Size

Select the size of documents to be scanned from this list.

Windows for customizing the paper size will appear when you click on [...] besides the list. You can save any document size as a customized setting (up to three) or for changing the order of the paper size in the list.

Image Mode

Specifies the image type for the scanned documents.

Black & White Documents are scanned in binary (black and white).

Halftone Documents are scanned with halftone processing in black and white.

Gray scale Documents are scanned in gradations from black to white. For this

mode you can select 8 bit (256 gradations) or 4 bit (16 gradations).

Color Documents are scanned in color. For this mode, you can select 24 bit

Color, 256 bit Color or 8bit Color.

SEE Documents with line drawings and photographs are scanned using (Selectable Edge halftone processing, and only the line drawings and text are empha-

Enhancement) sized.

This mode is most suitable for emphasizing only text of documents

containing both photographs and text.

[Scan] button

Starts scanning documents with the current settings.

[Preview] button

Documents are scanned preliminarily before the actual scanning.

You can confirm the image of the documents in the preview window.

[Close] button

Saves the current settings and closes this window.

[Reset] button

Used to undo changes of settings.

[Help] button


Opens the "TWAIN Driver Help" window. The window also opens by pushing the [F1] key.

[About...] button

Opens an information window about the TWAIN Driver's version.

[Option...] button

You can set up the details of optional functions on the window below.

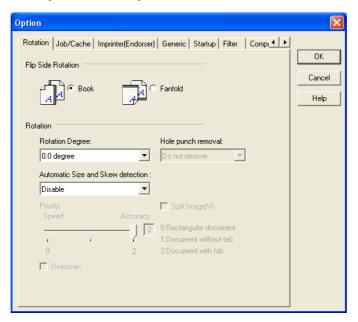

[Rotation] tab

Select this tab when setting items such as flip side rotation, image rotation, hole punch removal, skew correction, size and length detection, black background, and overscan.

[Job/Cache] tab

Select this tab when setting cache mode, job controls, multifeed detection, blank page skipping, etc.

[Imprinter (Endorser)] tab

Select this tab when setting printing configuration for imprinter (sold separately). Only shows when an imprinter is installed.

[Generic] tab

Select this tab to change the unit displayed on the Setting Window for the TWAIN Driver. (Millimeters, Inches, and Pixels are available)

[Startup] tab

Select this tab for setting the Scanner Operation Panel.

[Filter] tab

Select this tab for setting the image processing filter(s).

Page Edge Filler: Fills up the margins of the scanned documents with a selected color.

Digital Endoser: A character string, such as the alphabet and numbers, can be added in the

scanned document.

[Compression] tab

Select this tab for setting the compression rate of JPEG Transfer.

[Advance...] button

Click this button for settings of the advanced image processing.

You can set Edge Extract, Gamma Pattern, White Level Follower, Dropout Color, Reverse, etc.

[Config...] button

Click this button for configuring the Setting Files.

You can save the changed settings as a Setting File. From next scanning, the settings are quickly changed by using these Setting Files.

For details of each function, refer to the "TWAIN Driver Help".


■ ISIS Driver

The ISIS driver is a software driver which conforms to the ISIS standard. This driver can be used with an application that supports ISIS to perform scanning.

Normally, the scanner driver is launched via an application, and then the scan settings are configured in the setup dialog box of the driver (some applications may not display the setup dialog box).




Ways to launch the scanner driver differ depending on the application. For more details, refer to the manual or the Help files of the application.

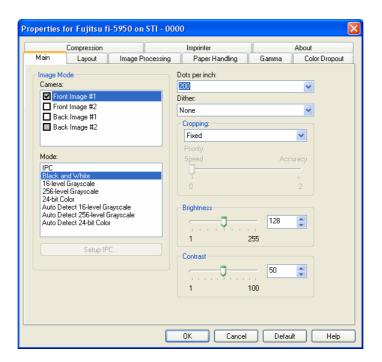

Settings for the ISIS driver are configured in the above dialog box.

For more details, refer to the ISIS Driver Help.

[Main] tab

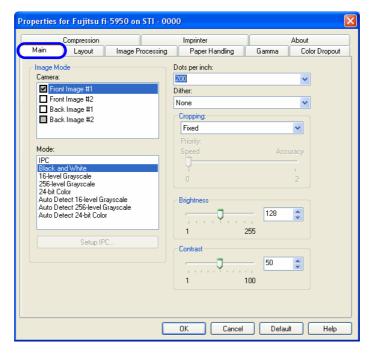

Camera

Selects the document's side (front or back) to be scanned.

The check-marked side(s) will be scanned.

By marking only the checkbox(es) of Front Image, you can scan the one side of the documents (simplex scan), and by marking the checkboxes of both Front and Back Images, you can scan the both sides of the documents (duplex scan).

Moreover, you can select color/gray scale scanning and black and white scanning (#1/#2) for both the Front and Back Images so that two different types of images are output at a scan. (Multi Image)

The settings you have made on this window are applied to the selected side(s) (Front Image #1, Front Image #2, Back Image #1, and/or Back Image #2).



If you select color or gray scale mode for a side (Front or Back) #1, you can select only black and white mode for the same side #2. In turn, if you select black and white mode for a side (Front or Back) #1, you can select either color or gray scale mode for the same side #2.

Mode

Select a color mode suitable for the purpose from the menu.

Image Processing Scans data in binary (black and white) using Image Processing Soft-

ware Option. When this mode is selected, the [Setup IPC...] button

below becomes available.

(Note that only when Image Processing Software Option is installed in

the computer, it is displayed.)

Black and White Scans data in binary (black and white). Distinguishes black from white

according to the fixed threshold. This scanning mode is suitable for

scanning line drawings and text documents.

16-level Gray Scans data with 16 gradations from black to white. This mode uses 4

bits per pixel.

256-level Gray Scans data with 256 gradations from black to white. This mode uses 8

bits per pixel.

24-bit Color Scans data as full-color images using 24 bits per pixel. This mode is

suitable for scanning color photographs. However, more memory space

is needed compared to gray scale scanning.

level, Auto Detect

24-bit Color

Auto Detect 16-/256- Distinguishes between color data and black and white data, and outputs documents as they are; that is, color data is output in color (or gray scale) mode and white and black data is output in black and white

Configure settings for color documents using Front/Back Image #1, and for black and white documents using Front/Back Image #2, under

"Camera".

[Setup IPC] button

You can configure settings for scanning with Image Processing Software Option.



For details on how to configure settings for Image Processing Software Option, refer to "Image Processing Software Option User's Guide". To display the "Image Processing Software Option User's Guide", select [Start] > [All Programs] > [Image Processing Software Option] > [User's Guide1.

Dots per inch

Specifies the number of pixels (dots) per inch.

Select a fixed resolution from the list or input a number from 50 to 600.

The higher the resolution, the more memory is required.

Dither

Select the halftone pattern for halftone scanning. This setting is available when "Black and White" is selected in the "Mode".

Pattern 1 This setting is suitable for scanning dark photographs.

Pattern 2 This setting is suitable for scanning dark-colored documents containing

both text and photographs.

Pattern 3 This setting is suitable for scanning light photographs.

Pattern 4 This setting is suitable for scanning light-colored documents containing

both text and photographs.

Error Diffusion This function minimizes the differences of color levels.

Cropping

Select how to crop scanned documents to output.

Fixed Outputs the document in the specified size.

Detect Length Detects the rear end of the document to scan the whole length of the

document. When shorter pages are included in the document, the output

images of them are adjusted to the original size.

Automatic Automatically detects the paper size of the document and outputs in the

original size. In addition, document skews are automatically detected

and corrected to output the image data.

Deskew Corrects document skews after scanning to output correct image data.

Long page Scans long documents and outputs the deskewed / cropped image data.


Brightness

Sets the brightness of the entire image. Specify the brightness as a number within the range of 1 (dark) to 255 (bright). To brighten the entire image, increase the value of the setting. To darken the entire image, decrease the value.

Contrast

Sets the contrast between light and shadow of the scanned image. Specify the contrast as a number within the range of 1 (low [soft]) to 100 (high [sharp]). Increasing this value makes the contrast sharper.

[Layout] tab

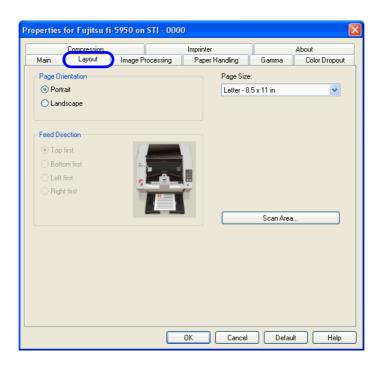

Page Orientation

Specifies the page orientation (Portrait or Landscape).


Paper Size

Selects a paper size according to the size of the document to be scanned. Select any size from the list.


[Scan Area...] button

Opens the [Scan Area] dialog box.

You can specify the area to be scanned.

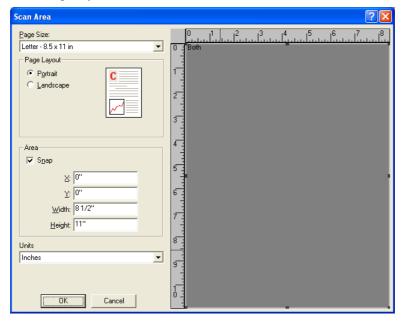

[Image Processing] tab

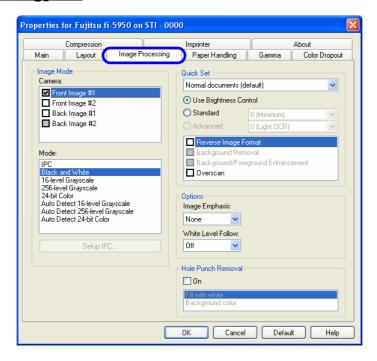

Quick Set

You can select a preset pattern for image enhancement. By selecting the one from the list, you can quickly set the details of the image enhancement processing. Available patterns are as follows:

Normal documents (default)	This item is suitable for scanning the documents like the ones used in offices.
Advanced DTC	This option scans any kind of documents by binary processing to produce data with good scanning quality. Documents containing thin letters, characters with the colored background, and colored charts cannot be scanned sufficiently clearly by ordinary binary processing. By using this option, however, you can achieve good scanning quality.
Background/Fore- ground Enhancement	This option makes image contours soft by disabling the Outline Extraction, and the whole image blurs.
NCR forms with back- ground removed	This option removes background of scanned images and smooths outline, giving an effect of anti-aliasing on the images.
Cleanup noisy docu- ments	This option removes noise on the data.
Magazines, Brochures, etc.	This option is suitable for scanning documents which have texts and photos (e.g. magazines, brochures).

Reverse Image Format

Converts colors from/to negative to/from positive.

Overscan

Scans the document allowing more margins than the ones of paper size specified at [Paper Size:]. Thus, the result of scanning is bigger than the specified paper size.

Image Emphasis

This option processes the outline of the scanned image as follows:

Low, Mid, High Emphasizes the contour of images. You can select the degree of

emphasis from low, mid, and high.

Smooth Smooths jaggy images.

White Level Follow

Use this option when the basic color of documents is not white; for example, when scanning newspaper.

Auto Automatically switches between "On" and "Off"; when the "Mode" is

"Black and White", this option is "On", and when the "Mode" is

"Color/Gray scale", it is "Off".

On Scans the document, adjusting the white balance of its background.

(Line drawing mode)

Off Scans the document with a predetermined value for the white bal-

ance.(Photograph mode)

Hole Punch Removal

When scanning punched documents that have punch holes on them, their images are output with punch holes removed. The background color is "black."


Fill with white Punch hole marks are filled with white.

Background color Punch hole marks are filled with the most used color around the punch

holes

When scanning a color document, select [Background color]. If you select [Fill with white], punch holes will be filled with white.

[Paper Handling] tab

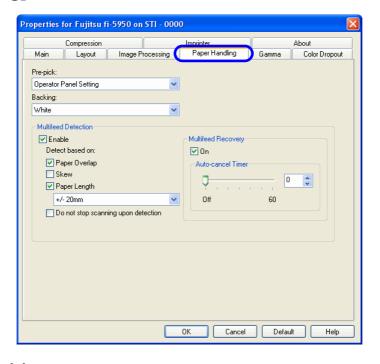

Pre-pick

With this option, you can enable or disable Pre-picking. Pre-picking is an operation that feeds documents into the ADF (to the scanning position) before starting actual scanning operation. Select "On" to shorten the required time for scanning.

Backing

With this option you can set the background color (Black/White).

Multi-feed Detection

Multi-feed is an error that occurs when two or more sheets are fed simultaneously. You can set conditions so that the scanner will stop its operation and display an error message when Multi-feed is detected.

Multi-feed can be detected based on the "Paper Overlapping" or "Paper Length".

Skew

With this option, you can set the scanner so that it will stop its operation and display error messages when any skewed document is detected.


Do not stop scanning upon detection

With this option, you can set the scanner so that it continues scanning even if any Multi-feed or skew is detected.

Multifeed Recovery

Scaning is not restarted for the set period (minutes) of time after a multifeed error. This period is specified here. If scanning is not started after the set minutes, the application is notified of the error by the driver. If Auto-cancel timer is set to 0, the application will never be notified of the error.

[Gamma] tab

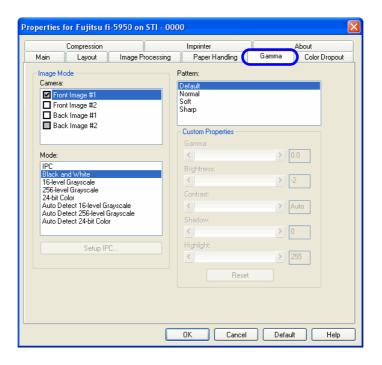

Pattern

Specifies how to correct Gamma. You can select a pattern from [Default], [Normal], [Soft], [Sharp], [Custom] and [Bright].

Note that [Custom] and [Bright] are only available when "Color" is specified.

Camera

Specifies side(s) to which you want to apply the settings made on this window.


Custom Properties

Can be specified when [Custom] or [Bright] is selected in the [Pattern] list. You can specify the numeric values of [Gamma], [Brightness], [Contrast], [Shadow] and [Highlight]. If these values are changed while [Bright] is selected, the pattern switches to [Custom].

[Color Dropout] tab

Red, Green, Blue (Light's three primary colors) or any color can be selected to drop out from the documents to be scanned. For example, if you specify "Red" when scanning black letters with red outlines, only the black part of the letters are scanned.

You can use this function when black and white or gray scale is selected.

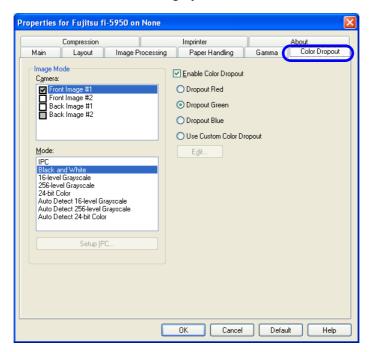

Enable Color Dropout

Color Dropout is enabled.

Dropout Red

An image in which red color dropout has occurred is output.

Dropout Green

An image in which green color dropout has occurred is output.

Dropout Blue

An image in which blue color dropout has occurred is output.

Use Custom Color

Dropout


An image in which a selected color dropout has occurred is output.

Custom Color Dropout

Any color to drop out can be specified when "Use Custom Color Dropout" is selected.

[Edit...] button

Displays the [Select Dropout color] dialog box where you can view a sample image and select up to three colors.

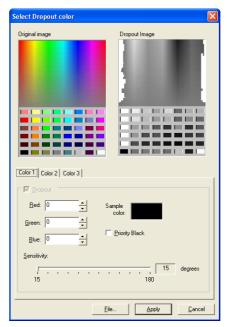

Original Image

The sample color is shown. By clicking colors in Original Image, you can select the color to drop out from the image.

Dropout Image

The image after color dropout is shown.

Dropout Color

Both the numeric values and the sample color of the specified color to drop out are shown.

You can change the numeric values by directly inputting them or using $\triangle / \blacktriangledown$.



Priority Black

Mark this checkbox when you want no color dropout for scanning letters.

Marking this checkbox avoids dropout of colors with low saturation such as black, which is often used for letters.

Sensitivity

You can specify the degree of color dropout.

The range of sensitivity: 15 - 180 degree (30 degree by default)

The larger the degree, the broader the range of colors to drop out.

[File...] button

You can select an image file (*.bmp format) to display it in "Original Image".

[Apply] button


Changes made are applied and the "Select Dropout color" window is closed.

[Cancel] button

Changes are voided and the "Select Dropout color" window is closed.

[Compression] tab

You can configure compression settings for scanning images in color or gray scale on this tab.

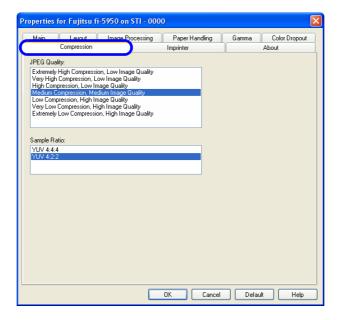

JPEG Quality:

Specify the compression level and image quality.

Sample Ratio:

Specify the sample ratio by which images are compressed. The file size of images compressed by the ratio of YUV4:2:2 is smaller than that of images compressed by the ratio of YUV4:4:4.


[About] tab

You can check the version number of the ISIS driver as well as hardware information of the scanner connected to the personal computer.



[Imprinter] tab

You can make settings for Pre-/Post-Imprinter Options (to be purchased separately). Unless Imprinter Option is installed, this tab will be unshown.

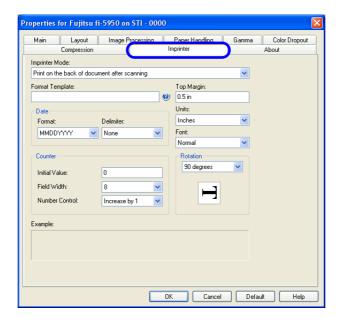

Do not print Imprinter is not used.

Print before scanning With Pre-Imprinter, printing is done on the front face of the

document.

Print after scanning With Post-Imprinter, printing is done on the rear face of the

document.

Format Template:

Letters typed in this text box are printed on the document.

You can use the following characters.

Alphabet A to Z, a to z **Numeric** 0, 1 to 9

Symbol ! " \$ # % & '() * + , - . / : ; < = > ? @ [\]^_ '{|}~

Year/Month/Day %Y Time %T

Counter %S (You can select 3-digit to 8-digit.

You can be placed the counter at the first,

middle or end of the string.)

Other One byte space

Up to 43 characters can be typed in.



To print characters "#" and "%", you have to type letters ## and %% respectively because these are special characters. Please be reminded that typing only one letter (#) displays the counter.

Date

Specifies how to display the date.

Format: You can specify how to display the date.

Delimiter: You can select delimiters (grouping separators).

Counter

Specifies the rule of display.

Initial Value: You can specify the initial vale.

Field Width: You can specify the number of digits for the counter.

(3 to 8 digits).

Number Control: You can specify the number by which the counter is

incriminated/decremented.

Top Margin:

Specifies the location where the printed string of characters starts.

Setting range: 0.5 to 10.5 in.(1.27 to 26.7cm)

Minimum unit: 0.1 in.(0.01cm)

Units:

Selects a unit for Top Margin values i(nch, cm, or pixel).

Font:

Selects the font to use for printing (Normal, Bold, or Narrow).

Rotation:

Specifies the orientation of strings of characters.

2.14 Before Using [Scan] / [Send to] button

By setting the link of the application software to the [Scan] button and [Send to] button, you can launch the linked application by simply pushing the button.

- 1. Select [Control panel] from the [Start] menu.
- 2. Select [Property] from [Scanner and Cameras].



For Windows XP, when the control panel is displayed in "Category" mode, select [Printer and other hardware] and then click [Scanner and camera].


3. Display the "fi-5950" properties.

Right-click the "fi-5950d" icon.

For Windows 2000, double-click the "fi-5950d" icon.

- 4. Select the [Event] tab.
- 5. Select the event to launch the application.

Select event from the [Select event] menu.

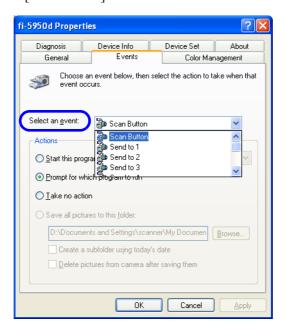

With this function, the next events can be selected.

Scan button (When clicking on [Scan] button) Send to 1-9 (When clicking the [Send to] button)

6. Select the application executed by the event.

For Windows XP, Windows Server 2003 and Windows Vista, select [Performing selected program] under [Performing] and then select the application to be processed.

7. Click OK.

2.15 Resuming from Power Saving Mode

Power saving mode saves the power consumption of the scanner while the power is turned on. When the scanner is left without operation for 15 minutes or more (factory initial setting), it automatically enters the power saving mode.

When the scanner entered the power saving state, the LCD indication of Operation panel becomes off and the green LED lamps for Power button and Paper Thickness keeps lighting.

If you want to resume the scanner from the power saving mode, take any of these actions below.


- Set documents on the hopper.
- •Press any button on the Operator panel (except the Power button*).
- * If you press the power button for two seconds or longer, the power is turned off.
- •Execute any command from the scanner driver screen in the PC.

Also, the scanner can be set to turn itself off automatically when it is turned on and left unused for a certain period of time.

You can save the power consumption by having the scanner turn off automatically.

To enable this setting, select the [Power off after a certain period of time] check box in [Device Setting] of the Software Operation Panel. For details, refer to "8.2 Power saving setting" on page 190.

To turn the scanner back on when it is automatically turned off, press the power button on the scanner. For details, refer to "2.1 Turning the Scanner ON /OFF" on page 8.



- Depending on the application you are using, the scanner may not be turned off automatically even when the [Power off after a certain period of time] check box is selected.
- If the scanner turns itself off automatically while you are using an image scanning application, close the application first, then turn the scanner back on.



The waiting time for entering the power saving mode can be set in a range from 15 to 55 minutes in steps of 5 minutes. To set the power saving mode, refer to "8.2 Power saving setting" on page 190.

2.16 Image Scanning Application

This section explains about the bundled "ScandAll PRO" image scanning application, which is used as an example to explain the procedures in this manual.

ScandAll PRO supports both TWAIN and ISIS drivers. By defining scan settings as profiles, you can customize the settings according to your preference.

2.17 Centralized Management of Scanners

This section explains about managing a large number of scanners in a unified manner by providing the following capabilities.

- Simultaneously update settings for multiple scanners and their drivers.
 Because there is no need to update each scanner one by one, a significant reduction is achieved in the time required to update a large number of scanners.
- Monitor scanners to check for any consumable parts that require replacement, or the occurrence of errors.
 - The alerts for consumable part replacement and errors are provided by scanners, which provides an easy way of checking the operating status of scanners.

To enable the above functions, "Scanner Central Admin" is required which consists of four applications bundled with this product:

Scanner Central Admin Server

Install this application in the main computer that is used for the centralized management of scanners.

By registering scanners on the Scanner Central Admin Server, you can build a system to run a unified management for all scanners.

· Scanner Central Admin Console

Install this application in a computer to upload update modules and to monitor the operating status of the scanners

The administrators can perform these tasks from the Scanner Central Admin Console window, where they can also check the alerts for consumable replacement and errors sent from the scanners.


· Scanner Central Admin Agent

Install this application in a computer connected to a scanner. It allows scanners to link with the Scanner Central Admin Server.

Linking with the Scanner Central Admin Server will enable you to apply updates on scanner settings, and the scanner can also send alerts on consumable replacement and errors.

SCAModule Creator

Use this application to create update modules to upload onto the Scanner Central Admin Server. It is only required for creating update modules.

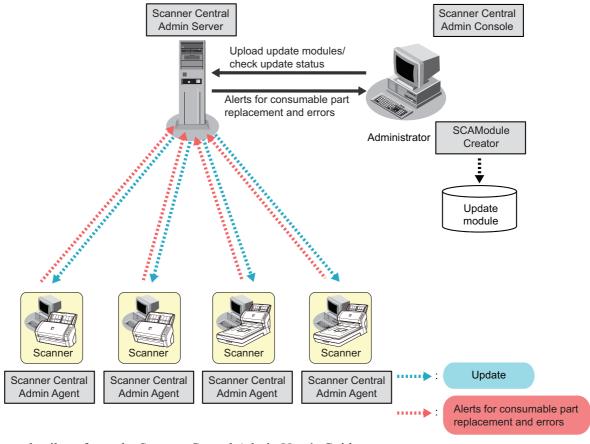

For more details, refer to the Scanner Central Admin User's Guide.

3 SCANNING VARIOUS TYPES OF DOCUMENTS

This chapter describes how to scan various types of documents.

This chapter explains operations using the screens of Windows XP. Depending on your OS, your PC's screen shots and the operation may be different from this manual. Be aware that when the TWAIN driver or the ISIS driver is updated, the screens and operations noted in this chapter may change. In that case, refer to the User's Guide provided with the update.

For information on how to scan documents in the following methods, refer to "ScandAll PRO User's Guide".

- Saving Scanned Image in PDF File Format
- Dividing a Multipage Document Using Patch Codes
- Dividing a Multipage Document Using Barcodes
- Specifying the Result of Zone OCR as a File Name
- Specifying the Result of Barcode Recognition as a File Name
- Creating Saving Folders for Each Batch Scan
- Saving Scanned Images from a Batch Scan to Microsoft SharePoint Server
- Restarting a Suspended Batch Scan
- Outputting Indexing Information File and Linking with an Application

3.1 Double Sided Scanning69	
3.2 Scanning Documents Longer than A370	
3.3 Scanning Documents with different widths72	
3.4 Excluding a Color from the image (drop out color)75	
3.5 Skipping blank Pages78	
3.6 Scanning the Image Brighter81	
3.7 Detecting Multifeeds84	

3.8 Correcting skewed Documents86
3.9 Setting Auto Correction for Document Page Orientations88
3.10 Multi Image Output91
3.11 Color/monochrome Auto Detection94
3.12 Not detecting Multifeed for fixed format

3.1 Double Sided Scanning

When you want both sides of a document to be scanned at the same time, set the feeding option to "Duplex".

Below is the procedure with TWAIN driver.

1. Set the document on the hopper.

Refer to section "2.6 Loading Documents on the Hopper" on page 17.


2. Adjust stacker in accordance with document size.

Refer to section "2.7 Setting up the Stacker" on page 22.

3. Start TWAIN driver with the application used.

Refer to section "2.10 Scanning Documents" on page 30.

4. Set the [Scan Type:] to "ADF (Duplex)".

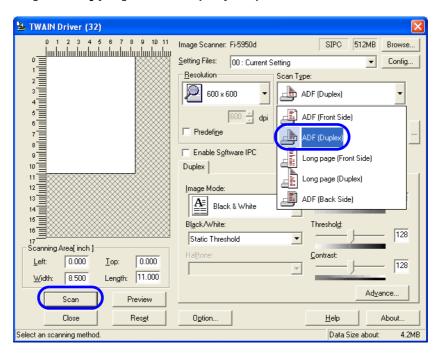

5. Set resolution and document size and so on, and then click [Scan] button.

3.2 Scanning Documents Longer than A3

When scanning documents longer than A3, set the feeding option to "Long Page". This scanner can scan documents up to 3,048mm (120inch) long.

Below is the procedure with TWAIN driver.

1. Set the document on the hopper.


Refer to section "2.6 Loading Documents on the Hopper" on page 17.

2. Adjust stacker in accordance with document size.

Refer to section "2.7 Setting up the Stacker" on page 22.



When scanning long pages (longer than A3), the document may be longer than the stacker extension even if it's pulled to the outermost position. In case like this, place a thick paper about the size of A4 on the stopper and make a slope as depicted below.

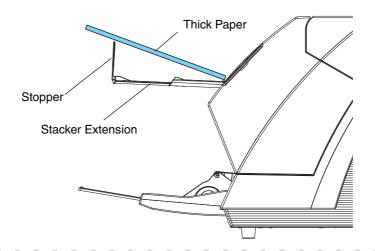


3. Start TWAIN driver with the application used.

Refer to section "2.10 Scanning Documents" on page 30.

4. Set [Scan Type:] to "Long Page (Front Side)" or "Long Page (Duplex)".


Choose "Long Page (Front Side)" when scanning one side; "Long Page (Duplex)", both sides.

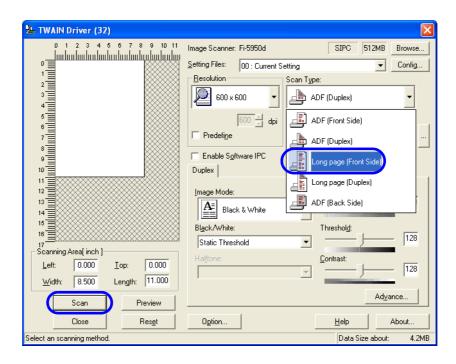

⇒ The "Set the document size" screen will appear.

5. Click [OK] after setting the document

When excessively long length is specified, the scanning speed may be slow. So, it is recommended to specify the closest length to the actual document.

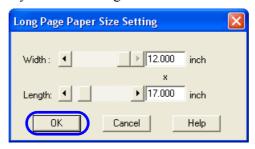


6. Set resolution and document size and so on, and then click [Scan] button.

3.3 Scanning Documents with different widths


When you scan a batch of documents with different widths, follow the instruction below.

1. Align the leading edge of the documents.

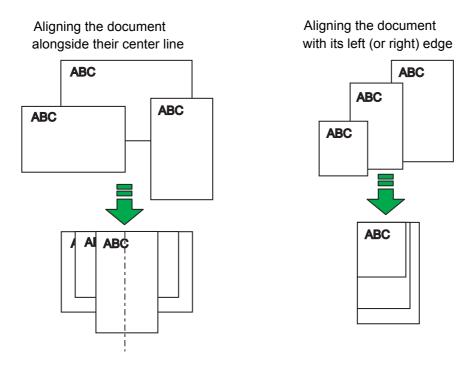


This section describes the procedure to align the document alongside their center line. For the procedure to align the document with its left (or right) edge, refer to "(2)Setting the document by either Side Guide of the hopper." on page 19.

2. Load the documents on the center of the hopper.

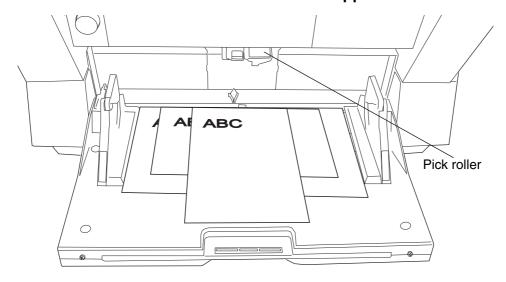




Load the documents so that each sheet can be reached by the pick roller. (If the documents are not placed below the Pick roller, the document feeding will not be possible.)

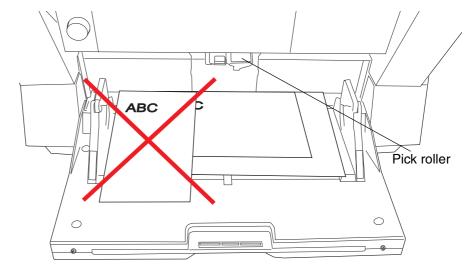

3. Align the side guides to the width of the widest document.

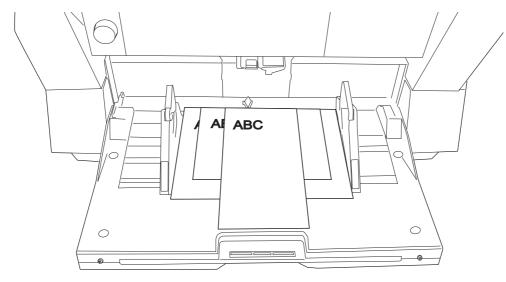

4. Align the stacker's position.

Refer to "2.7 Setting up the Stacker" on page 22 for details.

5. Start up the scanner driver.

Refer to "2.10 Scanning Documents" on page 30 for further information about how to start up the scanner driver.

6. Perform the settings for the scanning on the scanner driver's configuration window.

For the TWAIN driver

Paper size: (Main display)

Set the width of the widest, and the length of the longest document.

Automatic size and skew detection: ([Option] Screen → [Rotation] tab)

Select Automatic Page Size Detection.


For the ISIS driver

Cropping: (on the [Main] tab)

Select [Automatic].

7. Scan

⇒ The images of each document will be generated according to their size and displayed on the screen.

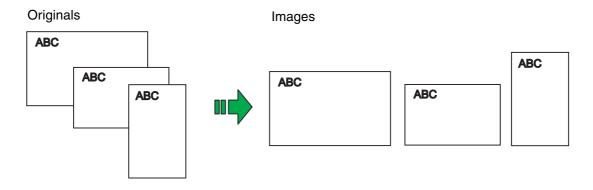




- When scanning mixed size document, because the hopper side guides will not function, the scanned images are easily skewed.
 We recommend you to enable "Automatic Page Size Detection".
- Multifeed Detection by length cannot be used together with "Automatic Page Size Detection".
- Refer to "7.8 Scanning Mixed Documents" on page 170 for details on scannable mixed size documents.

3.4 Excluding a Color from the image (drop out color)

One of the primary colors: red, green ,blue or any other color can be removed (dropped out) from the scanned image data. For example, if the document contains black text in a green frame, you can set the scanner to read only the text and eliminate (drop out) the green frame. (Dropout color will only work when scanning in monochrome or grayscale mode).

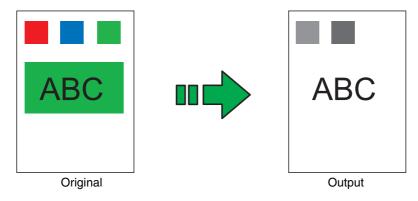

Example: the result of "dropping out" green.


To set the scanner to drop out a color, change the settings in the [TWAIN Driver] dialog box before scanning.

The following shows the procedure for changing the settings in this dialog box.

1. Start TWAIN Driver from your scanning application.

Refer to "2.10 Scanning Documents" on page 30.

2. Click [Advance...] button in the [TWAIN Driver] dialog box.

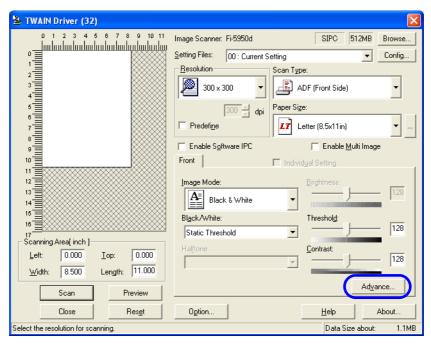

 \Rightarrow The [Advance] dialog box appears.


3. Select the color to be dropped out from [Dropout Color] under [More].

For example, if the document contains black text in green frame, select [Green] so that the scanner only reads the text and eliminates the frames.

If you do not wish to have any colors dropped out, select "None".



If you wish to drop out a customed color, please select [custom pattern 1-3]. When selecting [custom pattern 1-3], the following screen will be displayed.

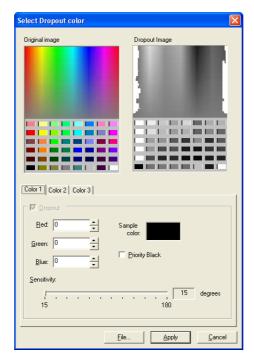

Original Image

Color samples are displayed. Click on the color you wish to exclude from the image. This will set the dropout color.

Dropout Image

The image as it will be generated after the dropout is displayed.

Dropout color

The selected dropout color will be shown as numeric value and as color sample.

You can enter a numeric value directly or use the $[\blacktriangle]/[\blacktriangledown]$ buttons to change the dropout color.

Priority Black

If you do not wish to drop out text from the image, please mark "Priority Black".

Colors of low saturation (like black), that are used normally for texts will not be dropped out by this function.

Sensitivity:

The sensitivity for the detection of the selected color to be dropped can be adjusted.

Setting range: 15 - 180 degree (default setting: 15 degrees)

The bigger the value for the sensitivity is set, the color range (tones) of the selected dropout color becomes wider (i. e. the tolerance for the color detection gets bigger).

[File...] button

An arbitrary image file (*.bmp format) can be displayed in [Original Image].

[Apply] button

The settings made in this screen will be applied and the window is closed.

[Cancel] button

The settings made in this screen will be aborted and the window is closed.

4. Click [OK] button.

[TWAIN Driver] dialog box will be redisplayed.

Then, scan the documents using this dialog box.


3.5 Skipping blank Pages

If enabled, the scanner will automatically detect blank pages of the documents and remove them from the scanned image. For example, when double sided and single sided pages are scanned together, the blank side of the single sided pages will be skipped during scanning. Change settings in the [TWAIN Driver] dialog box to enable skipping blank pages at scanning documents.

Start TWAIN Driver from your scanning application.


Refer to "2.10 Scanning Documents" on page 30.

2. Click the [Option...] button in the [TWAIN Driver] dialog box.

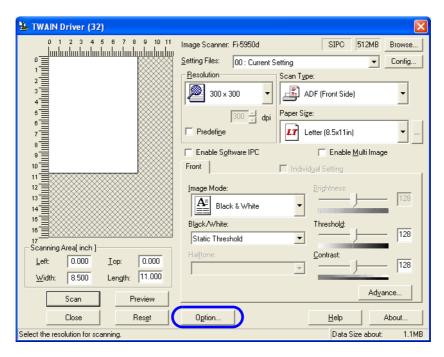

- \Rightarrow The [Option] dialog box appears.
- 3. Click the [Job/Cache] tab.


4. Check the [Blank Page Skip] box.

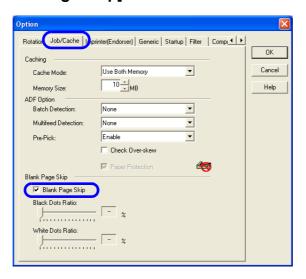

When the check box is marked, "Cache Mode" will change to "Use both memory".

5. Using the slider control under [Blank Page Skip], specify the Blank Page Skip degree.

<In Binary/Halftone mode>




For white pages, use the [Black Dots Ratio] slider bar to set the skip condition. For black pages, use the [White Dots Ratio] scroll bar to set the skip condition.

The value displayed to the right of the scroll bar displays the noise ratio(*1). If a scanned document is below this value, it is recognized as a blank page. The range is OFF(--) and from 0.2% to 3.0% (in increments of 0.2%).

*1: Ratio of black dots included in the scanning area. (for white pages)

<In Color/Grayscale mode>



The [TWAIN Driver] dialog box will be redisplayed. Then, perform the scanning operation on the dialog box.

Use the slider bar to set the skip condition in five stages from 1 to 5. The bigger the value, the more likely a page will be detected as blank.

6. Click [OK] when done.

The [TWAIN Driver] dialog box will return. continue from there.

3.6 Scanning the Image Brighter


The brightness of the scanned image can be increased for scanning in grayscale or color.


The following shows the procedure for changing the settings in this dialog box.

1. Start TWAIN Driver from your scanning application.

Refer to "2.10 Scanning Documents" on page 30.

2. Select grayscale or color in [Image Mode].

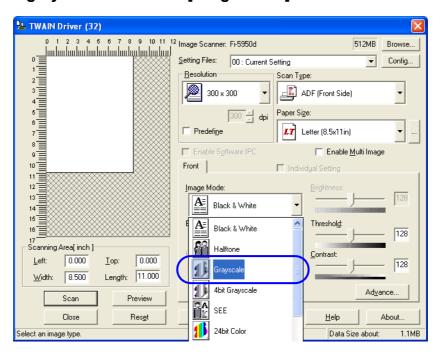


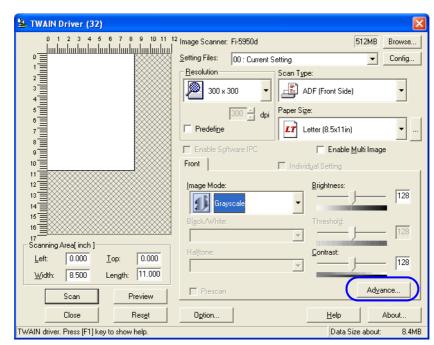

3. Click [Advance...] button in the [TWAIN Driver] dialog box.

⇒The [Advance] dialog box appears.



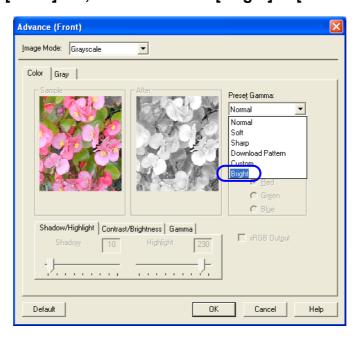

5. Click [OK] button.

[TWAIN Driver] dialog box will be redisplayed. Then, scan the documents using this dialog box.



When using applications other than ScandAll PRO, you can also increase the default brightness of the TWAIN driver. Select [Tools] - [FtSwtGmm] - [Twain] in the Setup DVD-ROM and double-click "FtSwtGmm.exe", and then select [Bright) in the [Default scan setting (TWAIN)] dialog box.



3.7 Detecting Multifeeds

"Multifeed" is an error that occurs when two or more sheets are accidentally fed into the ADF at the same time. You can set the scanner to display an error message or ring the buzzer when the scanner detects a multifeed.


Multifeed Detection can be set either through the scanner driver dialog box or through "Software Operation Panel". Refer to "8.4 Multifeed Detection" on page 193 for details on set up multifeed detection through "Software Operation Panel".

The following shows the procedure for changing the settings in the [TWAIN Driver] dialog box.

1. Start TWAIN Driver from your scanning application.


Refer to "2.10 Scanning Documents" on page 30.

2. Click the [Option...] button in the [TWAIN Driver] dialog box.

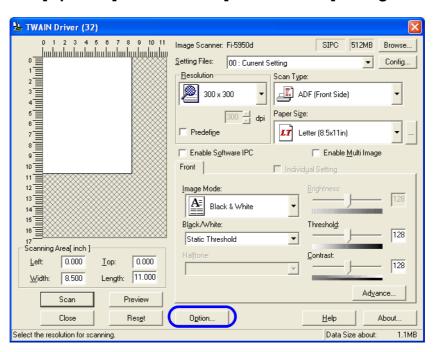

- ⇒ The [Option] dialog box appears.
- 3. Click the [Job/Cache] tab.

4. Select the detection conditions from [Multifeed Detection] under [ADF Option].

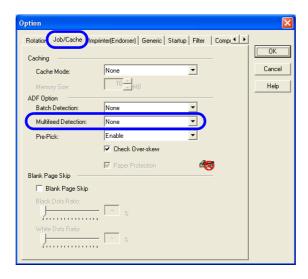

You can choose the following:

None

Multifeed detection is not performed.

Check overlapping

The scanner monitors for the overlapping of documents. The scanner detects a multifeed by differences in ultrasonic propagation. When this method is slected, two more options are available specified by other sections.

- Multifeed detection areas can be narrowed separately for left/middle/right
 Ultrasonic sensors to avoid unintensional multifeed detection of sticked photogragh or something on the document. To specify this, go to Step 4 in Section "8.4 Multifeed Detection" on page 193.
- If photograph or something is sticked on the document and its size and/or position are same, you can easily let the scanner memorize its size and/or position just scanning those document. To use this function, go to Section "8.10 Intelligent Multifeed Function" on page 205 or Section "3.12 Not detecting Multifeed for fixed format" on page 97.

Check length

The scanner monitors the length of documents. It detects a multifeed by differences in the document length when two or more document sheets are fed overlapping.

Check overlapping and length Hardware settings The scanner monitors both document overlapping and length to detect multifeeds.

The scanner will detect multifeeds according the settings configured on the Software Operator Panel. Refer to "8.4 Multifeed Detection" on page 193.

Furthermore, refer to "7.5 Multifeed Detection Conditions" on page 166 for detailed information about the document for multifeed detection.

5. Click the [OK] button.

The display returns to the [TWAIN Driver] dialog box. Then, perform the scanning operation on the dialog box.

The scanner will stop scanning if a multifeed is detected. When this happens, press the [Send to] button on the Operator panel to eject the multifeed document.

3.8 Correcting skewed Documents


You can set the scanner to automatically detect and correct skewed documents that are fed into the ADF. The configuration is done through the scanner driver.

The following shows the procedure for changing the setting from the [TWAIN Driver] dialog box.

1. Start TWAIN Driver from your scanning application.


Refer to "2.10 Scanning Documents" on page 30.

2. Click the [Option...] button in the [TWAIN Driver] dialog box.

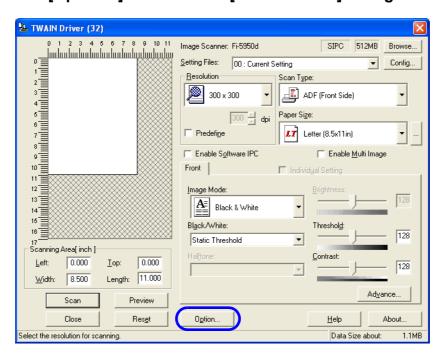

- \Rightarrow The dialog box appears.
- 3. Click the [Rotation] tab.

4. Select the [Automatic Page Size Detection] from the [Automatic Size and Skew Detection] menu.

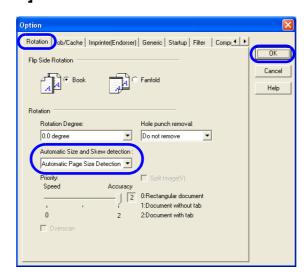

5. Click the [OK] button.

The display returns to the scanning operation [TWAIN Driver] dialog box.



When using either of the following documents, the Automatic page size detection may not function correctly.


- 1. Paper of weight 52g/m² or less.
- 2. Non-rectangular documents.
- 3. Documents with the margin filled with dark colors.



Depending on the condition of the document, a black frame appears around the perimeter of a page. If you find it obtrusive, you can remove the edge by using the "Page Edge Filler" function. For information about this function, refer to "8.9 Page Edge Filler (Automatic Page Size Detection)" on page 203.

3.9 Setting Auto Correction for Document Page Orientations

You can direct the scanner to automatically correct a batch of documents with a mixture of page orienta-

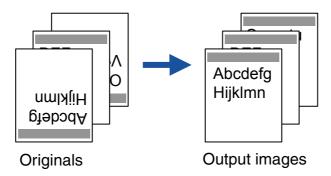


The following shows the procedure for changing the setting from the [TWAIN Driver] dialog box.

1. Start TWAIN Driver from your scanning application.


Refer to "2.10 Scanning Documents" on page 30.

2. Click the [Option...] button in the [TWAIN Driver] dialog box.

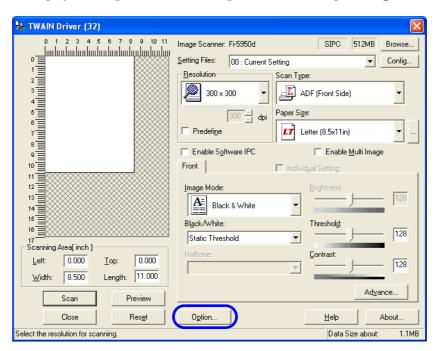

 \Rightarrow The dialog box appears.

3. Select the [Rotation] tab, and then select [Automatic] under [Rotation Degree].

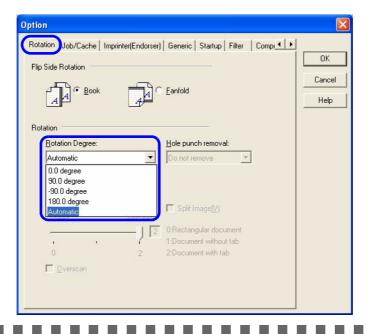



- •This function determines a document page orientation based on the characters printed on it. So it may not work properly for the following kinds of documents:
 - Documents with a resolution for scanning not between:
 300 dpi and 600 dpi (in Black & White mode) or
 200 dpi and 600 dpi (in Color or Grayscale mode)
 - Documents with many extremely-large/small characters
 - Documents on which the pitches of lines or characters are extremely narrow, or characters are overlapped
 - Documents with many photographs or figures and only a few characters
 - Documents on which characters are printed in various directions such as drawings
 - Documents written only in capital characters
 - Handwritten documents
 - Skewed documents
 - Documents written in a non-supported language. The supported languages are: Japanese, English, German, French, Spanish, Italian, Korean, Traditional Chinese, Simplified Chinese, Russian, and Portuguese
 - Documents with uneven colors, design and/or patterns in background
 - Documents with intricate design
 - Documents with a lot of noise


- •To judge text in documents, use a language that is set in Windows's Regional and Language Options.
- •The image orientation may not be corrected properly depending on the scanner driver setting at scanning (e.g. dithering).
- •If you cannot correct the image orientation properly, use the Edge Emphasis function of the drivers to correct it.
- •Shadows may remain on the edge of the scanned image.
- •[Automatic] in [Rotation Degree] is available only when ScandAll PRO is installed.

4. Click the [OK] button.

The display returns to the scanning operation [TWAIN Driver] dialog box

3.10 Multi Image Output

It is possible to get an output both in Color/Grey scale and binary black and white. This function may not work properly depending on the application software you use.

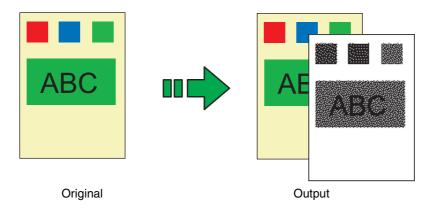


Example: Color document scanned with Multi Image.

The Multi Image setting can be done on the Scanner Driver.

The following operation uses the TWAIN driver.


1. Start TWAIN Driver from your scanning application. Refer to "2.10 Scanning Documents" on page 30.

- 2. Please check the [Enable Multi Image] checkbox in the [TWAIN Driver] window.
 - * When [Long Page..] is specified at [Scan Type:], you can not check this checkbox.

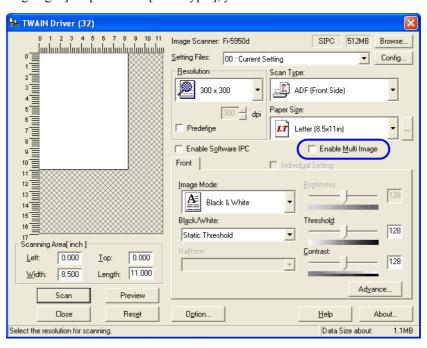

Main screen

⇒ The [Multi image output] dialog box will be displayed.

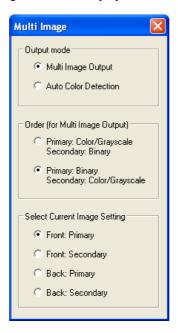

3. Select [Multi image output] under "Output mode".



4. Set the order of the output in "Order (for Multi image output)".



Primary: Color/Grayscale Secondary: Binary

The output order will be: [Color or Grey scale images] → [Binary monochrome images]


Primary: Binary Secundary: Color/Grayscale


The output order will be: [Binary monochrome images] → [Color or Grey scale images]

5. Select under "Select Current face" the side of your choice and perform then for each scan settings on the main configuration screen.



6. Click the [Scan] button to scan the document.

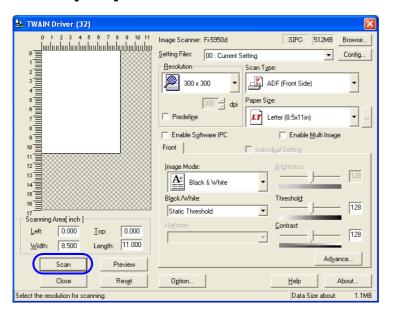

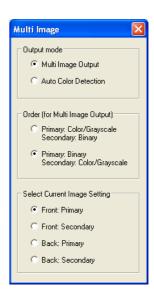

3.11 Color/monochrome Auto Detection


The scanner detects whether the scanned document is color or binary monochrome. According to this detection, the images will be output in color (or grey scale) for colored documents, ide binary black and white for monochrome documents.

*Depending on the application, this function may not operate properly.

The settings for Multi Image can be done on the Scanner Driver.

The following operation uses the TWAIN driver.

- 1. Start up TWAIN driver from the application you are using Refer to "2.10 Scanning Documents" on page 30.
- 2. Please check the [Enable Multi Image] checkbox in the [TWAIN Driver] window.
 - * When [Long Page..] is specified at [Scan Type:], you can not check this checkbox.

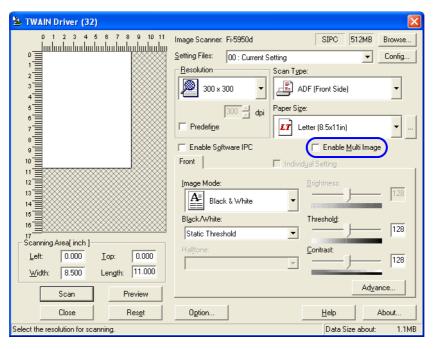


Main screen

 \Rightarrow The [Multi Image output] dialog box will be displayed.



3. Under [Output Mode Selection], check [Color/Monochrome Auto Detection].




4. Select under [Current Side Selection] the side of your choice and perform then for each scan settings on the main configuration screen.

The scan settings are done in advance, for the case documents are detected as [Color/Grey scale] or [Monochroe (binary black and white)].





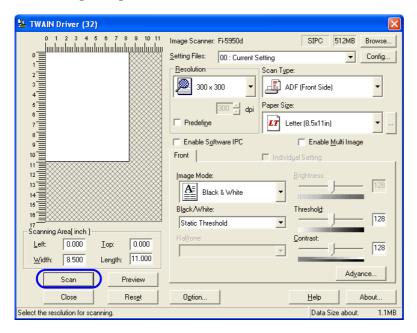




3.12 Not detecting Multifeed for fixed format

When sheets with glued photographs or sticky notes are scanned, the scanner can accidentally detect a multifeed error, and scanning is interrupted. This section explains "Intelligent Multifeed Function", or a resolution function that eliminates such a problem (hereinafter referred to as "this function"). This function has one manual mode and two automatic modes as follows:

- •Manual mode in which multifeed error detection is disabled by manipulating the Operator Panel
- •Automatic mode in which the scanner ignores multifeed errors based on information about the glued photos and labels. The above information is stored in memory; it refers to the position and length of those slips (hereinafter referred to as the "glued paper").

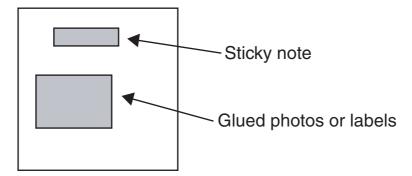

■ Intelligent Multifeed Function

There are three modes; select one according to your needs. Select a mode by using the Software Operation Panel. For how to select a mode, see section 2.

Item in Software Operation Panel	Method to bypass Multifeed	Applicable case	Comments
Manual mode (Bypass by front panel button)	When a Multifeed error occurs, press [Send to] to eject sheet in the scanner's transport path. Examine the last sheet scanned. If no paper is glued on the ejected sheet, return the sheet to the Hopper and press the [Scan] button. If glued paper is present on the ejected sheet, return the sheet to the Hopper, press the [Function] button once (Slow Blink rate of the function number display will change to Fast Blink rate) and press the [Scan] button. The scanner will not check for a Multifeed error on the first sheet being scanned. The following sheets are checked for Multifeed errors with the already-existing Multifeed settings in the Software Operation Panel or driver. (Default)	Use this mode when you want to continue scanning, while checking for glued paper every time a multifeed error is detected.	Pages scanned before errors are sent to memory. Extraneous images may be generated during a Multifeed error.
Automode 1 (Bypass by combination of length and position)	When a Multifeed error occurs, press [Send to] to eject sheet in the scanner's transport path. Examine the last sheet scanned. If no paper is glued on the ejected sheet, return the sheet to the Hopper and press the [Scan] button. If glued paper is present on the ejected sheet, return the sheet to the Hopper, press the [Function] button once (Slow Blink rate of the function number display will change to Fast Blink rate) and press the [Scan] button. The scanner will record the length and position of the glued paper that caused the error. The following sheets are checked for Multifeed errors and then the scanner bypasses Multifeed, if the scanned overlap pattern is same as already recorded pattern(s).	Use this mode when you scan many sheets in a fixed format; for example, when every sheet has the same size glued paper at the same position.	Pages scanned before errors are sent to memory. Extraneous images may be generated during a Multifeed error.
Automode 2 (Bypass by length)	When a Multifeed error occurs, press [Send to] to eject paper in the scanner's transport path. Examine the last sheet scanned. If no paper is glued on the ejected sheet, return the sheet to the Hopper and press the [Scan] button. If glued paper is present on the ejected sheet, return the sheet to the Hopper, press the [Function] button once (Slow Blink rate of the function number display will change to Fast Blink rate) and press the [Scan] button. The scanner will record the length of the glued paper that caused the error. The following sheets are checked for Multifeed errors and then the scanner bypasses Multifeed, if the scanned overlap pattern is the same or shorter than the already recorded pattern.	Use this mode when you scan multiple sheets, each having different-size glued paper at a different position.	Pages scanned before errors are sent to memory. Extraneous images may be generated during a Multifeed error.

How to Configure Settings with Software Operation Panel

1. First, make sure that the scanner is connected to the personal computer, and then turn on the scanner. Second, press the [Function] button until "C" is displayed on the Operator Panel. Third, press the [Send to] button. Finally, the Software Operation Panel window will appear. (When Kofax VRS (optional) is used, display the Software Operation Panel window by using the Start menu in Windows.)




If the [Software Operation Panel] is password protected, enter the password to cancel the View Only mode.

For details on how to enter the password to cancel the View Only mode, refer to "Password Setting" on page 177.

2. Select the "Device setting 2" tab, and then select "Intelligent Multifeed Function" under "Device Setting". Using this tab, do the following:

- Intelligent Multifeed
 Function
 Select one of three modes described above.
- Clear overlap pattern When this checkbox is selected, the overlap pattern (length and position) remembered by Auto mode is deleted from memory. If [Do not remember] is specified for [Remember multifeed pattern at poweroff], the overlap pattern is automatically deleted upon changing the mode. However, changing the mode does not delete the overlap pattern if [Remember] is specified.

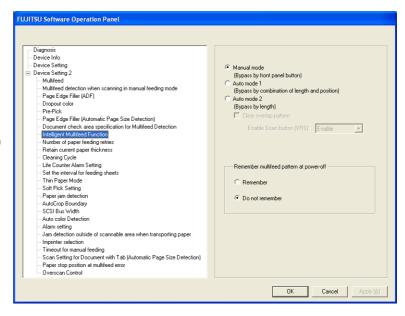

Enable Scan button (VRS)

This setting is only enabled when Kofax VRS (optional) is used.

You can specify whether you want to use the [Scan] button to restart scanning after a multifeed error when Kofax VRS (optional) is used. Select [Enable] to use the [Scan] button. (When [Disable] is selected, scanning is restarted using the Autoresolve function of Kofax VRS (optional).) Note that this button is grayed out when Kofax VRS (optional) is not used.


•Remember multifeed pattern at power-off
Specify whether or not to remember the multifeed pattern upon turning off the power.
When [Remember] is specified, the multifeed pattern used before the power-off remains available after turning the power back on (Up to 8 patterns can be stored in memory).

■ Before Using This Function


Configure the following settings before using this function:

- When the TWAIN driver is used, select [Use Memory on Scanner] or [Use both Memory] as [Cache Mode] on the [Job/Cache] tab of the "Option" dialog box. Otherwise you can not continue scanning after a multifeed error.
- 2. When ISIS or the TWAIN driver is used, if you want to start scanning by using the [Scan] button after a multifeed error, configure the driver settings as described below.

[TWAIN driver] Mark the [Enable Scanner Panel] and "Enable [Scan] Button" checkboxes on the [Startup] tab of the "Option" dialog box.

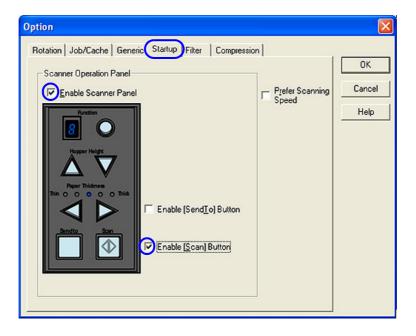

[ISIS driver] Mark the "On" checkbox under "Multifeed Recovery" and set "Auto-cancel Timer" to 0 or any value (minutes) on the [Paper Handling] tab of "Properties for Fujitsu fi-5950..." dialog box.

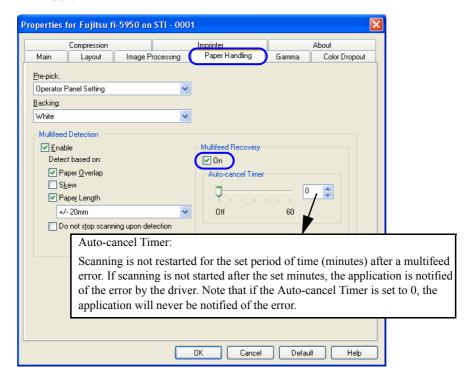

3. In the Software Operation Panel or driver dialog box, select [Check Overlapping] or [Check Overlapping and length difference].

■ Descriptions

1. After a multifeed error, press the [Send to] button to eject sheets from the transport path, or open the cover and remove sheets from the transport path. Return the ejected or removed sheets onto the hopper. When the sheets are removed, the function number displayed changes as follows:

Multifeed error

No sheets in the transport path


"U" and "2" is indicated alternately → A function number blinks

If no paper is glued on a sheet but a multifeed error is detected, press the [Scan] button or restart scanning by using the personal computer (in this case, do not press the [Function] button).

If glued paper is present on a removed/ejected sheet, and you think it caused a multifeed error, go to step2.

2. [When using this function] Press the [Function] button, and then make sure that the function number blinks at shorter intervals before you press the [Scan] button or restart scanning by using the personal computer.

From then on, the blinking speed of the function number is increased or decreased (switches between "fast" and "slow") every time the [Function] button is pressed. When sheets are scanned while the function number blinks at shorter intervals, the scanner operates according to the mode selected as follows:

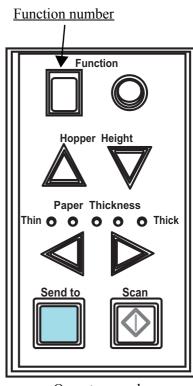

Operator panel


- •Manual mode (Bypass by front panel button)
 - The first sheet is scanned without a multifeed error being detected. When the second and later sheets are scanned, multifeed errors are detected based on the settings that have been configured in the Software Operation Panel or driver dialog box.
- •Auto mode1 (Bypass by combination of length and position)
 The scanner remembers the length and location of glued paper (overlap pattern) that caused a multifeed error and continues scanning. When glued paper of a similar pattern is detected, the scanner automatically ignores it to avoid multifeed error detection. (Note 1)(Note 2)
- Auto mode2 (Bypass by length)

The scanner remembers the length of the glued paper that caused a multifeed error and continues scanning. When glued paper of the same or shorter length is scanned, the scanner automatically ignores it to avoid multifeed error detection. (Note 2)

- Note 1: In this mode, up to 32 overlap patterns can be remembered (stored in memory). When the 33rd overlap pattern is detected, the first-remembered pattern is deleted from memory.
- Note 2: The remembered overlap patterns can be deleted from memory by pressing the [Function] button for 2 seconds or longer while the function number is blinking. After all overlap patterns are deleted, the display indicates "o". By doing so, you can delete all 32 overlap patterns. Be careful not to delete necessary overlap patterns, too.

4 DAILY CARE

This chapter describes how to clean the scanner.





- Take care not to pinch your fingers inside the ADF.
- The glass inside the ADF becomes hot during operation. Be careful not to get burned.

4.1 Cleaning Materials and Areas Requiring Cleaning1	06
4.2 Cleaning the Pad1	08
4.3 Cleaning the Rollers (using the cleaning sheet)1	09
4.4 Cleaning the Rollers (with a lint-free cloth)1	12
4.5 Cleaning the Transport path and the sensors1	16

4.1 Cleaning Materials and Areas Requiring Cleaning

■ Cleaning materials

Cleaning materials	Part No.	Remarks
Cleaning sheet	CA99501-0016 (*1)	20 sheets/pack
Cleaner F1	PA03950-0352 (*1)(*2)	1 bottle, 100ml/bottle Moisten cloth with this fluid and wipe the scanner to clean.
Cotton swab	Commercially available	
Cleaning Wipe	PA03950-0419 (*1) (*3)	24 sheets/pack
Lint-free dry cloth	Commercially available (*4)	

^{*1)}For the purchase of the cleaning material, contact the FUJITSU scanner dealer where you purchased the scanner.

^{*2)}It may take long before the cleaner vaporizes if a large quantity is used. When cleaning the scanner parts, dampen a cloth with modest quantities of the cleaner. In addition, wipe off the cleaner completely with a soft lint-free cloth to leave no residue on the surface of the cleaned parts.

^{*3)}Pre-moistened with Cleaner F1, Cleaning wipes are used instead of moistened cloths.

^{*4)}Any lint-free cloth can be used.

■ Locations requiring Cleaning and Cleaning Frequency

The following shows the standard cleaning frequency for each area requiring cleaning.

cleaning method	cleaning sheet	cloth moistened with cleaner F1
cleaning cycle	every 10,000 scanned pages (*1)	every 10,000 scanned pages (*1)
Pad	-	✓
Pick rollers	~	✓
Brake roller	~	✓
Separator rollers	~	✓
Feed roller	✓	✓
Pinch roller	~	✓
Transport path	✓	✓
Glass	-	✓
Skew-detection sensor	-	✓
Document sensors	-	✓

- ✓ · Cleanable
- : Not cleanable
- *1)During scanning, toner, paper dust, oil from carbonless paper, and glue stick to scanner rollers. If the rollers are not cleaned regularly, these will become more difficult to remove. Therefore, it is strongly recommended that the rollers be cleaned after daily use.




- The scanner must be cleaned more frequently if you scan any of the following types of sheets:
 - Documents of coated paper
 - Documents that are almost completely covered with printed text or graphics
 - Paper whose back side has carbon.
 - Chemically treated documents such as carbonless paper
 - Documents containing a large amount of calcium carbonate
 - Documents filled in with pencil
- Do not use aerosol sprays to clean the scanner. The air from the spray
 may cause dirt and dust to enter the scanner mechanism and resulting
 scanner failure or malfunction.
- You must clean the following area more thoroughly when you use fi-590PRF or fi-590PRB imprinters. The imprinter ink tends to stick to the document transport path.
 - Removable sheet guide
 - Glass sheet guide
 - Feed rollers
 - Pinch rollers
- You can confirm the number of scanned sheets after the last cleaning by "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.


4.2 Cleaning the Pad

1. Open the ADF cover.

For details, refer to "2.3 Opening and Closing ADF" on page 12.

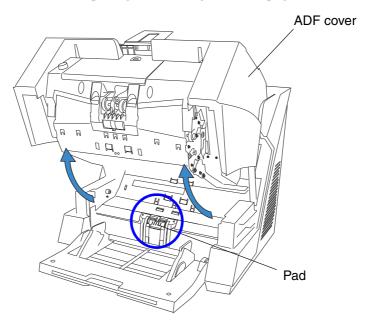

2. Wipe the Pad (the parts of rubber) with a lint-free cloth, moistened with cleaner F1, in the direction indicated by the arrows.

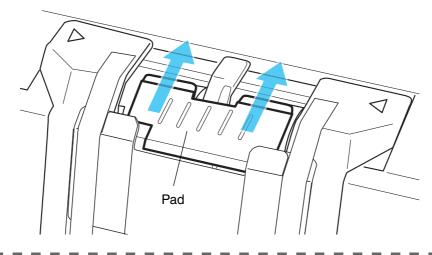



It may take long before the cleaner vaporizes if a large quantity is used. When cleaning the scanner parts, dampen a cloth with modest quantities of the cleaner. In addition, wipe off the cleaner completely with a soft lint-free cloth to leave no residue on the surface of the cleaned parts.


3. Close the ADF.

If all the cleaning is done, reset the Cleaning counter by referring "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.


4.3 Cleaning the Rollers (using the cleaning sheet)

Use the cleaning sheet to clean the upper and lower ADF transport path and the rollers.

1. Open the Pre-Imprinter Cover when the power is off.

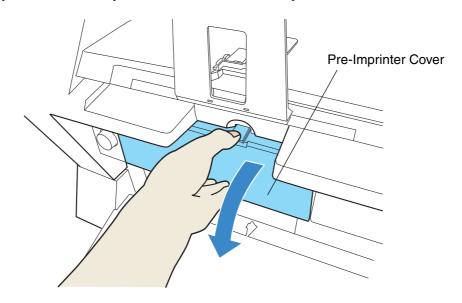

- 2. While pressing the [Scan] button , press the power button switch on the scanner.
 - ⇒ The function number display will change as shown below.



3. Stop pressing the [Scan] button



- \Rightarrow The scanner will be started up in the test mode.
- 4. Close the Pre-Imprinter Cover.


5. Set the side guide of the hopper to B4 width.

For details, refer to "2.6 Loading Documents on the Hopper" on page 17.


6. Pull out the stacker extension and adjust it to the length of the cleaning sheet.

For details, refer to "2.7 Setting up the Stacker" on page 22.

7. Remove the protective paper from the cleaning sheet.



8. Place the same cleaning sheet with the adhesive side <u>facing up</u> on the hopper table, aligning its left side with the side guide, as shown in the illustration below.




9. Press the [Scan] button installed.)




2 times (3 times, if Imprinter option is

⇒ The function number display will change as shown below and the cleaning sheet will be fed and ejected into the stacker.



10. Place the same cleaning sheet with the adhesive side <u>facing up</u> on the hopper table, aligning the right side with the side guide, as shown in the illustration below.



- 11. Press the [Scan] button installed.)
- 2 times (3 times, if Imprinter option is
- ⇒ The cleaning sheet will be fed and ejected into the stacker.
- 12. Remove the protective paper from a new cleaning sheet and place it with the adhesive side <u>facing down</u> on the hopper table, aligning its left side with the side guide.
- 13. Press the [Scan] button 2 times (3 times, if Imprinter option is installed.)
 - ⇒ The cleaning sheet will be fed and ejected into the stacker.
- 14. Place the same cleaning sheet with its adhesive side <u>facing down</u> on the hopper table, aligning its right side with the side guide.
- 15. Press the [Scan] button 2 times (3 times, if Imprinter option is installed.)
 - ⇒ The cleaning sheet will be fed and ejected into the stacker. If all the cleaning is done, reset the Cleaning counter by referring "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.
- 16. Press the power button (b) to turn off the scanner.


4.4 Cleaning the Rollers (with a lint-free cloth)

1. Move the Hopper down to the "low" position if it is set in an upper level.

For details, refer to "2.5 Setting the Hopper Height" on page 15.


2. Open the ADF cover.

For details, refer to "2.3 Opening and Closing ADF" on page 12.

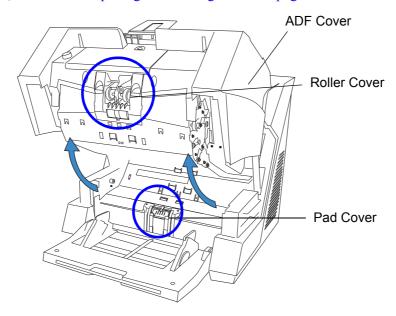


3. Open the roller cover.

Grab the depression on the left and right side with your fingers and pull towards you to open the cover.

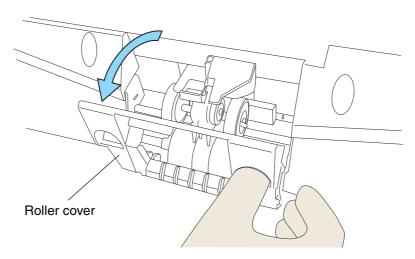

4. Clean the Pick roller and the rubber surface of the Separator rollers using the cleaner F1.

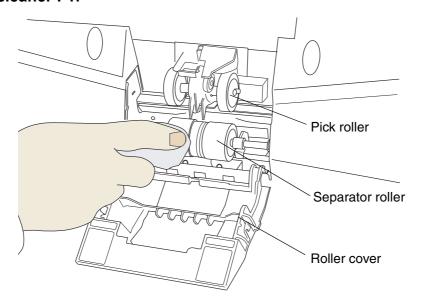




It may take long before the cleaner vaporizes if a large quantity is used. When cleaning the scanner parts, dampen a cloth with modest quantities of the cleaner. In addition, wipe off the cleaner completely with a soft lint-free cloth to leave no residue on the surface of the cleaned parts.

5. Close the roller cover after the cleaning is finished.


6. Open the Pad cover.

Grab both sides of the cover, press to the inside and pull down (towards you), as shown in the illustration below.

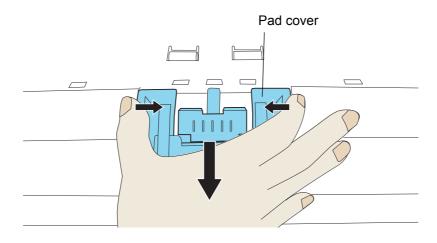


7. Remove the Brake roller.


Move the roller slightly to the right, then pull it upwards to remove it, as shown below.

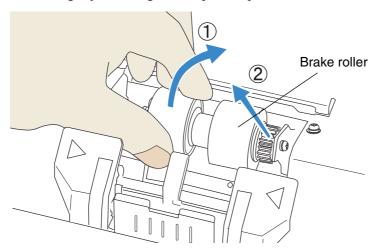

8. Clean the rubber surface of the Brake roller using a lint-free cloth, moistened with the cleaner F1.

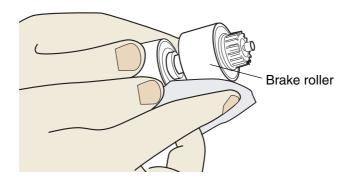


9. Install the Brake roller again after cleaning.

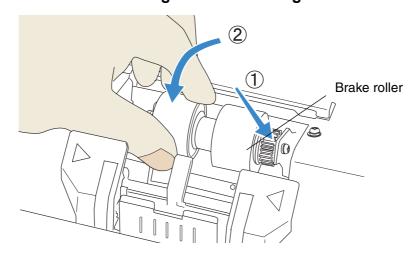


10. Close the Pad cover.

11. Clean the Feed rollers (metal rollers, each set consists of 2 rollers, 9 locations) on the upper side of the lower transport path using a lint-free cloth moistened with the cleaner F1.

Take care especially to remove black stains on the rollers, since such stains are deteriorating the feeding performance.

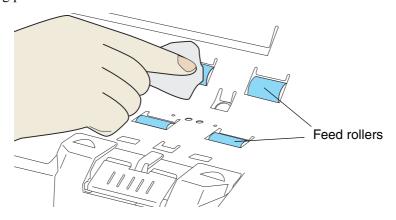

12. Clean the Pinch rollers (rubber rollers, each set consists of 2 rollers, 9 locations) on the upper side of the upper transport path using a lint-free cloth moistened with the cleaner F1.

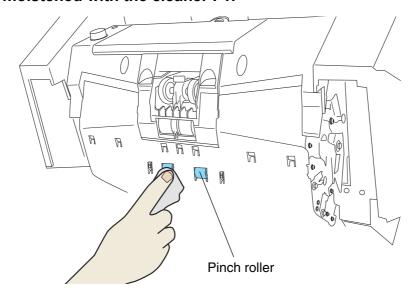

13. Close the ADF cover.

For details, refer to "2.3 Opening and Closing ADF" on page 12. If all the cleaning is done, reset the Cleaning counter by referring "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

4.5 Cleaning the Transport path and the sensors

1. Open the ADF cover.


For details, refer to "2.3 Opening and Closing ADF" on page 12.

2. Clean the whole transport path (stainless and glass parts) using a lint-free cloth moistened with the cleaner F1.




If the transport path is stained with paper dust or other debris, please vacuum-clean it carefully.

Upper transport path

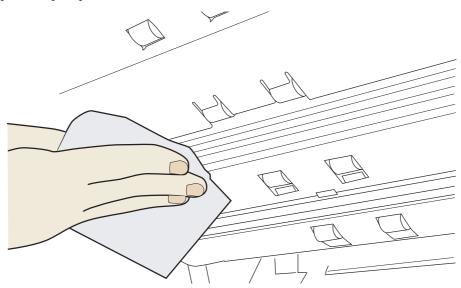


Lower transport path

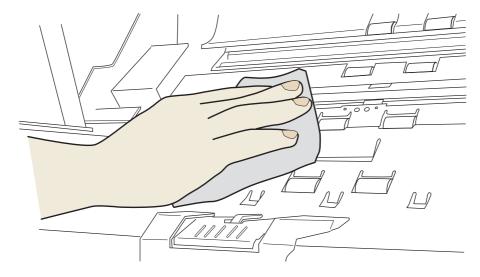




It may take long before the cleaner vaporizes if a large quantity is used. When cleaning the scanner parts, dampen a cloth with modest quantities of the cleaner. In addition, wipe off the cleaner completely with a soft lint-free cloth to leave no residue on the surface of the cleaned parts.


3. Clean the supersonic sensors (three pieces), pick sensor (one piece), and skew sensors (six pieces) installed in the lower transport path using a cloth moistened with the cleaner F1.

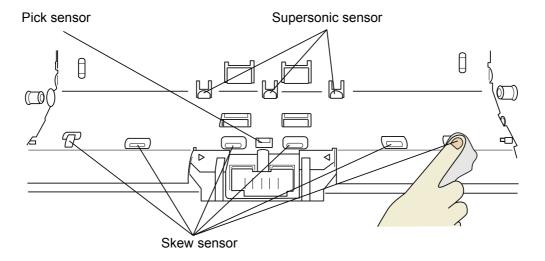


4. Clean the supersonic sensors (three pieces) and the reflectors for the pick sensor (one piece) and skew sensors (six pieces) installed in the upper transport path using a cloth moistened with the cleaner F1.

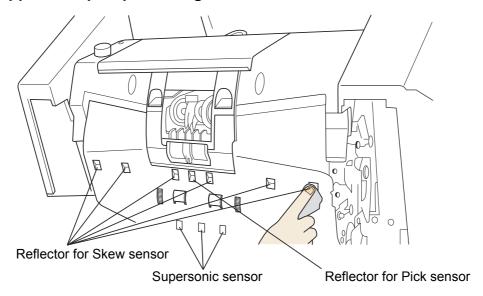


5. Clean the IMP top-sensor (one piece), RED top-sensor (one piece), and REJ sensor (one piece) installed in the lower transport path using a cloth moistened with the cleaner F1.

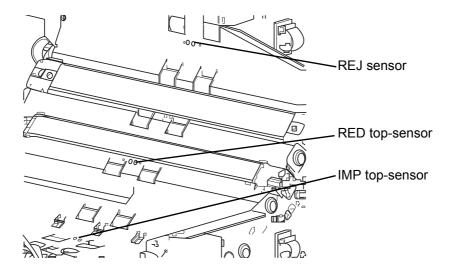


6. Clean the IMP top-sensor (one piece), RED top-sensor (one piece), and REJ sensor (one piece) installed in the upper transport path using a cloth moistened with the cleaner F1.

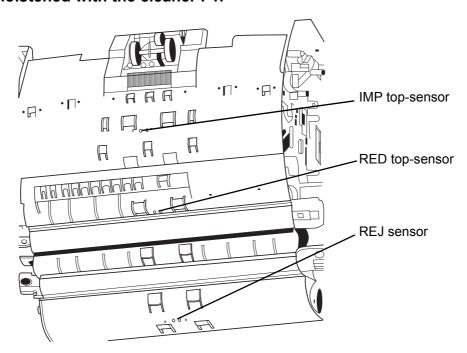

7. Clean the EXT sensor (one piece) located near the outlet in the upper transport path using a cotton swab moistened with the cleaner F1.

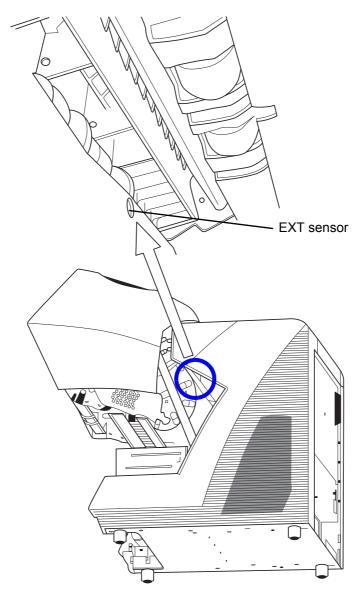

8. Clean the surface of two pads on the Hopper with a lint-free cloth, moistened with cleaner F1.

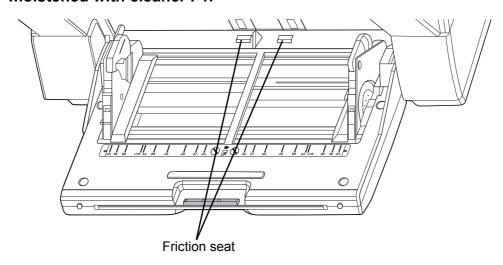

9. Close the ADF cover.

For details, refer to "2.3 Opening and Closing ADF" on page 12. If all the cleaning is done, reset the Cleaning counter by referring "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

5 REPLACEMENT OF CONSUMABLES

This chapter describes how to replace consumables.

5.1 Consumables and Replacement Cycle122	
5.2 How to check and reset the Consumable/Cleaning Counter123	_
5.3 Replacing the Pad127	
5.4 Replacing the Pick Roller128	
5.5 Replacing the Separator Rollers130	
5.6 Replacing the Brake Roller133	_

5.1 Consumables and Replacement Cycle

The following table lists the Part No. and the standard replacement cycle of the consumables. It is recommended that you stock extra consumables before the ones in the scanner reach the end of Their service life. The consumables must be replaced periodically. You can check the number of scanned pages for the Pad, the Pick roller, the Brake roller, the Separation roller and the Print Cartridge. For further details, refer to "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

Part Name	Part No.	Standard replacement cycle
Pad	PA03450-K014	600,000 sheets or 1 year
Pick Rollers	PA03450-K011	600,000 sheets or 1 year
Brake Roller	PA03450-K013	600,000 sheets or 1 year
Separator Rollers	PA03450-K012	600,000 sheets or 1 year
Print Cartridge	CA00050-0262	4,000,000 characters

The replacement cycle is based on the printing on Letter/A4 woodfree paper or wood containing paper documents (80 g/m²). The replacement cycle may differ due to paper quality, print density or paper type. The print cartridge is a consumable for the imprinter option (sold separately). It can be used for the Preand Post-imprinter.

Please understand that some parts may need replacement by service engineer depending on scanned document type or its duty of scanning. For further information, contact the FUJITSU scanner service provider. For the purchase of the consumables, contact the FUJITSU scanner dealer where you purchased your scanner.



Use only the consumables specified by PFU Limited. Do not use any consumables from other manufacturers.

5.2 How to check and reset the Consumable/Cleaning Counter

This section describes the procedure of the following items using Software Operation Panel in PC.

- •Confirmation of consumable usage and cleaning cycle.
- •Counter reset after replacing the consumable or cleaning the scanner.



If the [Software Operation Panel] is password protected, enter the password to cancel the View Only mode.


For details on how to enter the password to cancel the View Only mode, refer to "Password Setting" on page 177.

Checking consumable or cleaning counter


- 1. Turn on the scanner and confirm if it is connected correctly to you PC.
- 2. From the [Start] menu select [All Programs] → [Scanner Utility for Microsoft Windows] → [Software Operation Panel].



⇒ The [Software Operation Panel] window will be displayed.

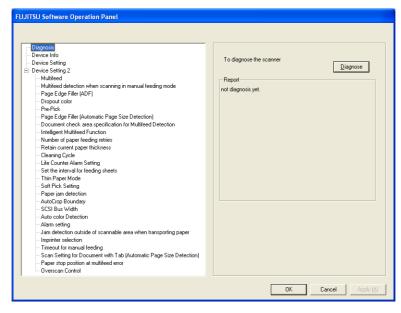

3. Select the [Device Settings] tab.

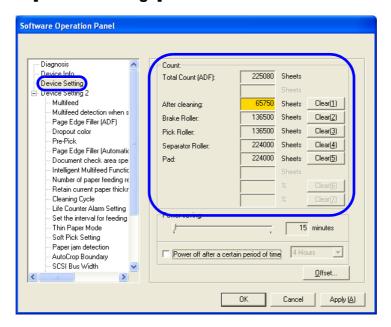

In this window, the following items can be confirmed.

Total Page Count(ADF):	The total number of scanned sheets.
After cleaning:	The number of sheets, scanned since last scanner cleaning.
Pad:	The number of sheets, scanned since last exchange of the Pad.
Brake Roller:	The number of sheets, scanned since last exchange of the Brake roller.
Pick Roller:	The number of sheets, scanned since last exchange of the Pick rollers.
Separator Roller:	The number of sheets, scanned since last exchange of the Separator rollers.
Remaining Ink (Post): Remaining Ink (Pre):	The remaining ink of the imprinter (sold separately) ink cartridge. (Only displayed when the imprinter option is used)


■ Resetting of the consumable/cleaning counters

Reset the consumable/cleaning counter(s) every time you replace the consumable or clean the scanner, following the procedure given below.




In View Only mode, the Software Operation Panel cannot be reset. For details on "View Only mode", refer to "Password Setting" on page 177.

1. Click the [Clear] button beside the replaced consumable.

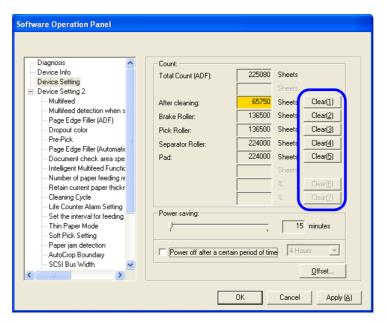


- 2. Click the [OK] button on the displayed confirmation message.
 - ⇒ The value of the counter will be reset to "0". ("100", in case of "Remaining Ink").
- 3. To close the window of the [Software Operation Panel], click the [OK] button.



■ Consumable/Cleaning message

The following message may appear while using the scanner:

Consumable message:



Cleaning message:



Replace the consumable or clean the scanner when this message is sisplayed.

After clicking the [Ignore] button, this message will disappear and scanning will continue. Replace the consumable as soon as possible.

To stop scanning and replace the consumable, click the [Cancel] button.

For the replacement of consumables, refer to the following sections.

Pad: "5.3 Replacing the Pad" on page 127

Pick rollers: "5.4 Replacing the Pick Roller" on page 128

Separator rollers: "5.5 Replacing the Separator Rollers" on page 130


Brake roller: "5.6 Replacing the Brake Roller" on page 133

For the scanner cleaning, refer to "4 DAILY CARE" on page 105.


5.3 Replacing the Pad

1. Open the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

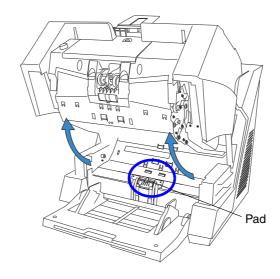

2. Move the Pad to the left, than pull it up in order to remove it from the scanner.

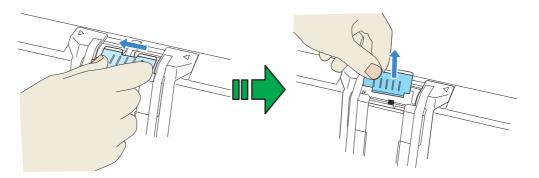

- 3. Install the new Pad in the reversed order of the removable.
- 4. Close the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.


5. Reset the Pad counter.

Refer to "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

5.4 Replacing the Pick Roller


1. Open the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

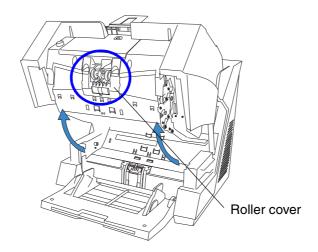


2. Open the roller cover.

Put your fingers in the depression on the left and right side and pull the cover towards you to open it.

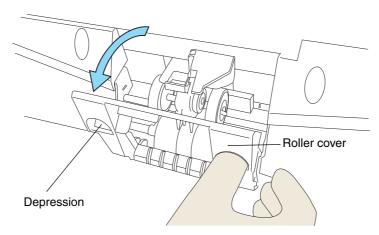

3. While pulling up the tab away from the shaft, slide the Pick rollers (2 rollers, left and right) from the shaft for removal.

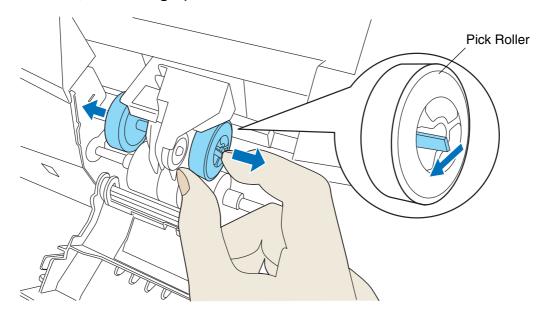

4. Install the new Pick rollers (2 rollers, left and right) in the reversed order of the detachment.

Put the roller correctly on the shaft, until it is locked in place.

- 5. Close the roller cover.
- 6. Close the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.


7. Reset the Pick roller counter

Refer to "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

5.5 Replacing the Separator Rollers


1. Open the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

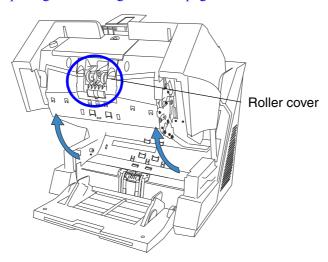


2. Open the Roller cover.

Put your fingers in the depressions on the left and right side and pull the cover towards you to open it.

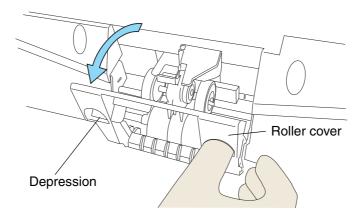


3. Slide Separator rollers (2 rollers, left and right) away from each other along the shafts for removal as shown below.

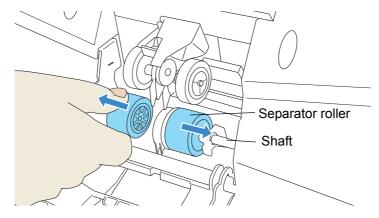

 \Rightarrow The shaft will be locked in outer position and stays there.


4. Remove the rollers from their shafts.

Remove both, the left and the right rollers.

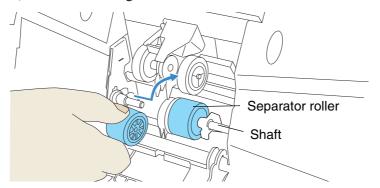


5. Put the new rollers (2 rollers, left and right) on the shafts.

Align the screw with the groove on the Separation roller to put the roller on the shaft.

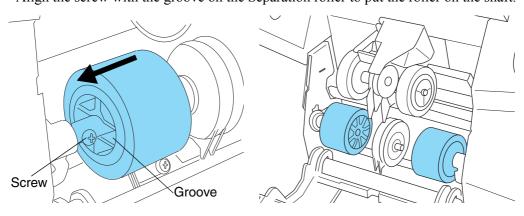

6. Close the roller cover.

⇒ The Separator rollers will move to their original position automatically.

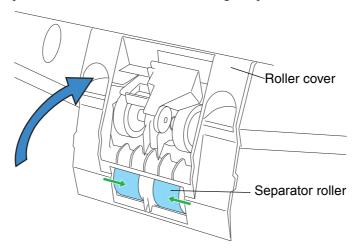

7. Close the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

8. Reset the counter of the Separation roller.

Refer to "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.


5.6 Replacing the Brake Roller

1. Move the Hopper down to the "low" position if it is set in an upper level.

For details, refer to "2.5 Setting the Hopper Height" on page 15.


2. Open the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

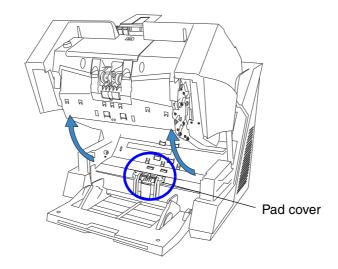


3. Open the Pad cover on the lower transport path.

Grab both sides of the cover, press to the inside and pull down (towards you), as shown in the illustration below.

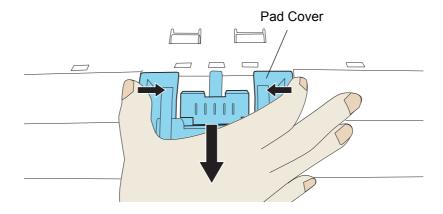


4. Remove the Brake roller

Lift up the left side of the Brake roller and remove the left shaft. Then pull the right shaft out of its hole to remove it.

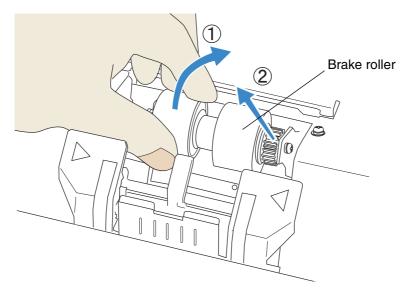

5. Install the new Brake roller.

After inserting the right end of the shaft into the hole, attach the left end.

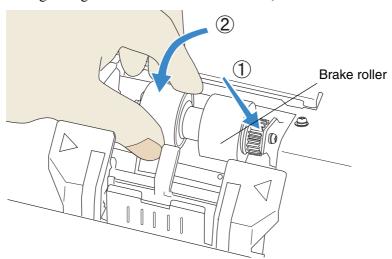

6. Close the Pad cover.

7. Close the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

8. Reset the Brake roller counter.

Refer to "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

6 SOLVING COMMON PROBLEMS


This chapter describes how to clear document jams, how to remedy other problems, items to be checked before contacting an authorized service provider and how to check labels on the scanner.


6.1 Clearing Document Jams136	
6.2 Error messages of the Operator panel138	
6.3 Troubleshooting142	
6.4 Before Contacting a Service Provider155	
6.5 Labels on the Scanner157	

6.1 Clearing Document Jams

When documents have been jammed during scanning, use the following procedure to remove them from the scanner.











• Do not use force to remove jammed papers. Remove jammed documents after opening the ADF cover.

1. Remove all remaining documents from the scanner before removing jammed documents.

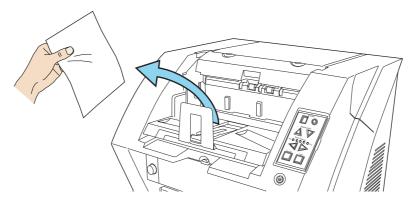


2. Open the ADF cover.

Refer to "2.3 Opening and Closing ADF" on page 12.

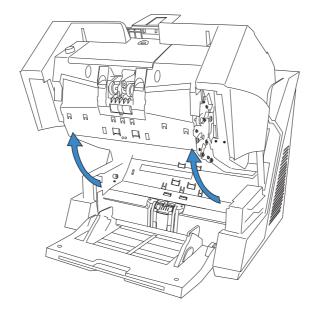

3. Remove the jammed documents.

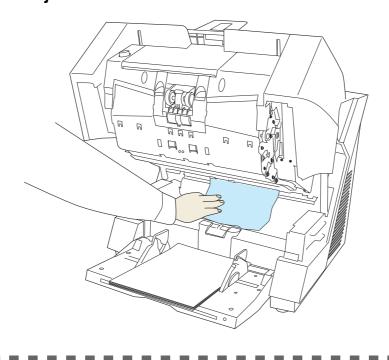




Clips and staples cause the documents to jam when fed through the scanner. Therefore, remove all staples and clips from the documents before scanning, and examine if the transport path is free from any debris.

4. Close the ADF cover.

Refer to ."2.3 Opening and Closing ADF" on page 12.

6.2 Error messages of the Operator panel

When a problem occurs, [J] or [U] followed by a number will be displayed on the function number display in case of an <u>temporary error</u>. In case of an <u>hardware alarm</u>, [E] and a number will be displayed alternately. A temporary error can be solved by the user, the resolving of hardware alarms requires professional service support from an authorized FUJITSU scanner service partner.

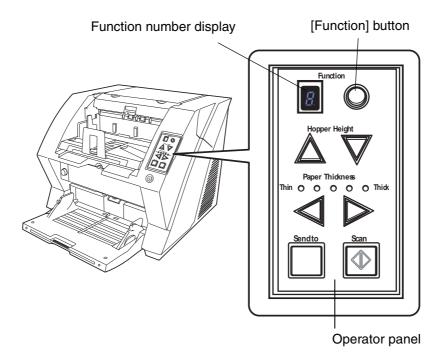

When the Error Recovery Guide is installed on your PC, its window will be displayed when stating up Windows. When hardware alarms or temporary errors occur, the name and code of the error, as well as further information will be displayed.

Note down the displayed information and click the [Details] button to obtain further solutions for trouble-shooting.





Error Recovery Guide is stored on the SETUP DVD-ROM. More details about the installation can be found in the fi-5950 Getting Started under "2.3 Installing the Scanner Software".

■ Temporary Errors

[J] or [U] and a number will be displayed alternately.

(When pushing the [Scan] or [Send to] button, the error indication on the function number display will disappear and the scanner goes into the ready status.)

Display	Meaning	Solution				
J0	The paper feeding stopped to protect jammed paper from damage.	1. Remove the jammed document. Refer to "6.1 Clearing Document Jams" on page 136.				
U1	A paper jam occurred.	2. Confirm if the document conditions are appropriate for scanning with the ADF. (Refer to "7.2 Document Quality" on page 161)				
U2	A Multifeed occurred.	When pushing the [Send to] on the Operator panel, the multi fed papers will be ejected.(*1)				
U4	The ADF or the Pre-Imprinter cover is opened.	Close the ADF cover or Pre-Imprinter cover correctly.				
U6	The print cartridge of the imprinter (sold separately) is not set.	This error occurs only when the imprinter option (sold separately) is used. Refer to the "fi-590PRF/fi-590PRB Imprinter Operator Guide" for further details.				
U8	 One of the following error occurred: Document sensors are dirty. The stacker is full. The Brake roller or Separator rollers are not installed properly. 	 Clean the document sensors. For details, refer to "4.5 Cleaning the Transport path and the sensors" on page 116. Verify that the number of sheets ejected to the stacker is below stacker's capacity, and that the Pick roller is not set for manual feeding. Verify that the both rollers are installed properly. For details, refer to "5.5 Replacing the Separator Rollers" on page 130 and "5.6 Replacing the Brake Roller" on page 133. 				

^(*1) If you press the [Send to] button before the error message is displayed on the PC screen, multifed documents are not ejected.

■ Hardware Alarms

[E] and a number will be displayed alternately.

EO Error in the Hopper or Stacker E2 Optical system error (front) E3 Optical system error (fack) E4 The motor fuse has blown out. E5 The lamp fuse has blown out. E6 Operator panel error E7 Trouble occurred in the internal memory (EEPROM). E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) E6 Image memory error E7 Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Fackground switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 The imprinter fuse has blown out. E18 Option board error (*3) E19 LSI error E10 Sensor error (*4) E19 LSI error E10 Sensor error (*4) E10 LSI error E11 Cooling load error (*3) E11 Cypical system error (*4) E12 Heater error (*3) Extended the scanner on a nuthorized FUJITSU scanner service provider. E19 LSI error E10 Sensor error (*4) E10 LSI error E11 Cypical system error (*3) Extended the scanner of an authorized FUJITSU scanner service provider. E10 Sevolt control board fuse has blown out.	Display	Meaning	Solution
Detical system error (troin) E3 Optical system error (back) E4 The motor fuse has blown out. E5 The lamp fuse has blown out. E6 Operator panel error E7 Trouble occurred in the internal memory (EEPROM). E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) Ec Image memory error E6 SCSI interface or USB interface controller error E7 Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Heater error E10 Extended memory error E10 ROM error E11 Copling fan error E12 Heater error E15 Extended memory error E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E10 ROM error E11 Coption board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E10 ROM error E11 Coption board in the communication inside of the scanner.	E0	Error in the Hopper or Stacker	1. When you encounter any alarm, turn off and on the
E4 The motor fuse has blown out. E5 The lamp fuse has blown out. E6 Operator panel error E7 Trouble occurred in the internal memory (EEPROM). E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) EC Image memory error E1 Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Heater error E10 ROM error E11 Cooling fan error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Extended memory error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E10 Troubles occurred in the internal memory inside of the scanner. E19 LSI error E10 ROM error E10 ROM error E11 Cooling fan error E12 Heater error E23 Extended memory error E24 Extended memory error E55 Extended memory error E56 Extended memory error E77 Extended memory error E87 Extended memory error E88 Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Exam	E2	Optical system error (front)	
The lamp fuse has blown out. E6 Operator panel error E7 Trouble occurred in the internal memory (EEPROM). E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) E0 Image memory error E1 ScSI interface or USB interface controller error E7 Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Heater error E10 ROM error E11 Cooling fan error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E10 Option board error (*3) Extended rome out. E18 Sensor error (*4) E19 LSI error E10 Troubles occurred in the internal memory inside of the scanner. Paper thickness" on the operator panel, for at least 2 seconds. Write down two characters displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the panel. Example: In this case, "64" is displayed on the "Display is column and from the two codes from the "Display" column and from the procedure above to the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider.	E3	Optical system error (back)	
2 seconds. Write down two characters displayed between 2 seconds. Write down two characters displayed	E4	The motor fuse has blown out.	
E6 Operator panel error E7 Trouble occurred in the internal memory (EEPROM). E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) E0 Image memory error E1 ScSI interface or USB interface controller error E1 Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E5	The lamp fuse has blown out.	
Example: In this case, "64" is displayed on the panel.	E6	Operator panel error	
E8 The SCSI fuse has blown out. (*1) E9 Image memory error EA Imprinter error (*2) Ec Image memory error Ed SCSI interface or USB interface controller error EF Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Extended memory error E19 Extended memory error E10 Extended memory error E10 Extended memory error E11 Extended memory error E11 Extended memory error E12 Heater error E13 Extended memory error E14 Extended memory error E15 Extended memory error E16 Extended memory error E17 Extended memory error E18 Sensor error (*4) E19 LSI error E18 Troubles occurred in the communication inside of the scanner.	E7	l	Example: In this case, "64" is displayed on the
EA Imprinter error (*2) EC Image memory error Ed SCSI interface or USB interface controller error EF Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an author-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E8	The SCSI fuse has blown out. (*1)	
Ec Image memory error Ed SCSI interface or USB interface controller error EF Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E9	Image memory error	$ b \Rightarrow b \Rightarrow q \Rightarrow $
EC Image memory error Ed SCSI interface or USB interface controller error EF Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	EA	Imprinter error (*2)	Penart the true codes from the "Dianley" column
Ed SCSI interface or USB interface controller error EF Background switching mechanism error E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	Ec	Image memory error	
E10 ROM error E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	Ed	SCSI interface or USB interface controller error	you purchased the scanner or an authorized
E11 Cooling fan error E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	EF	Background switching mechanism error	FUJITSU scanner service provider.
E12 Heater error E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E10	ROM error	
E15 Extended memory error Confirm the following: 1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E11	Cooling fan error	
1. Is the used additional memory compatible? 2. Is the additional memory installed correctly? 3. Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider. E16 Option board error (*3) E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner.	E12	Heater error	
E17 The imprinter fuse has blown out. E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner. Scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider.	E15	Extended memory error	 Is the used additional memory compatible? Is the additional memory installed correctly? Is the additional memory damaged? Note that this error will be displayed only three times after powering the scanner on. After that, the scanner will perform scanning in the state of no additional memory installed. When you encounter this E15 error, turn off and on the scanner. If the alarm is still displayed on the Function Number Display, contact the dealer where you purchased the scanner or an autho-rized
E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner. tion Number Display, contact the dealer where you purchased the scanner or an authorized FUJITSU scanner service provider.	E16	Option board error (*3)	
E18 Sensor error (*4) E19 LSI error E1A Troubles occurred in the communication inside of the scanner. purchased the scanner or an authorized FUJITSU scanner service provider.	E17	The imprinter fuse has blown out.	
E1A Troubles occurred in the communication inside of the scanner.	E18	Sensor error (*4)	
of the scanner.	E19	LSI error	scanner service provider.
E1b 5-volt control board fuse has blown out.	E1A		
	E1b	5-volt control board fuse has blown out.	

^{*1} Turn off the scanner. Check that the SCSI cable is plugged firmly, and then turn on the scanner again.

- *2 Turn off the scanner. Reinstall the ink cartridge according to the Operator's Guide of Imprinter, and then turn on the scanner again.
- *3 Turn off the scanner. Reinstall the option board properly, and then turn on the scanner again.
- *4 1.If any abnormality occurs, turn off the scanner once, and then turn it on again.
 - 2.If doing this (step 1) does not improve the situation, press the and buttons, which are labeled as "Paper thickness" on the operator panel, for at least 2 seconds. Write down two characters dis-



Example: In this case, "14" is displayed on the panel.





3. According to section "4.5 Cleaning the Transport path and the sensors" on page 116, clean respective sensors for each code as shown in the table below.

Code	Sensor Name
1b	Supersonic sensor (three pieces in the upper and lower transport paths; respectively)
11	Pick sensor (one piece in the lower transport path) Reflector for pick sensor (one piece in the upper transport path)
17	Skew sensor (six pieces in the lower transport path) Reflector for skew sensor (six pieces in the upper transport path)
12	IMP top-sensor (one piece in the upper and lower transport paths; respectively)
13	RED top-sensor (one piece in the upper and lower transport paths; respectively)
15	REJ sensor (one piece in the upper and lower transport paths; respectively)
14	EXT sensor (one piece in the upper transport path)


6.3 Troubleshooting

This section describes common troubles during usage and how to remedy the troubles. Before you ask for repair service, check the following flowchart to determine the trouble. If you can not resolve the trouble after following the flowcharts, check the items in section "6.4 Before Contacting a Service Provider" on page 155, and then contact an authorized FUJITSU Scanner service provider.

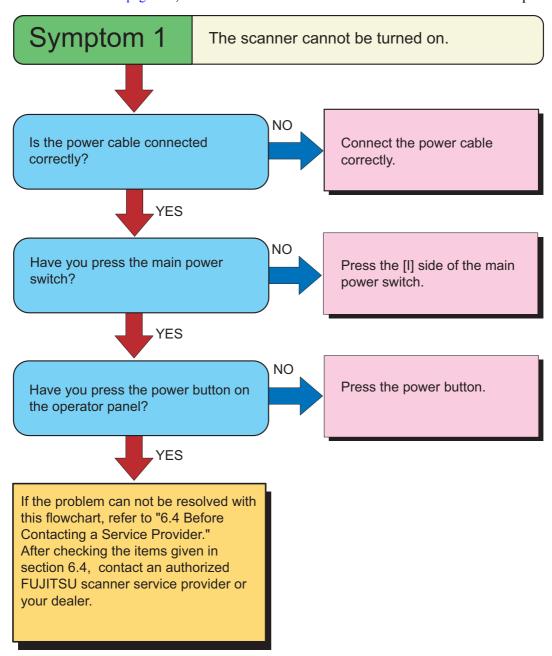


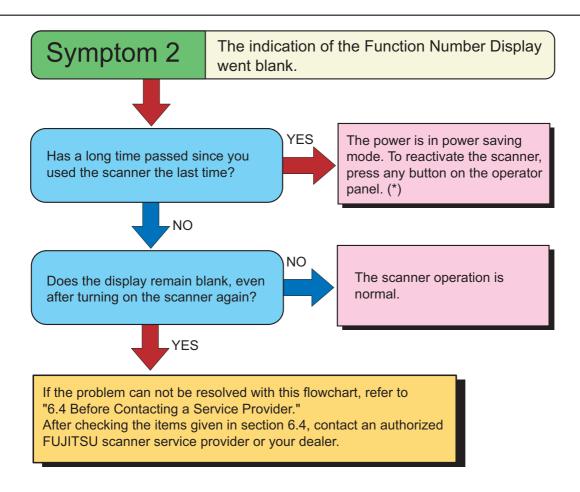


(*) Press any button except the Power button.

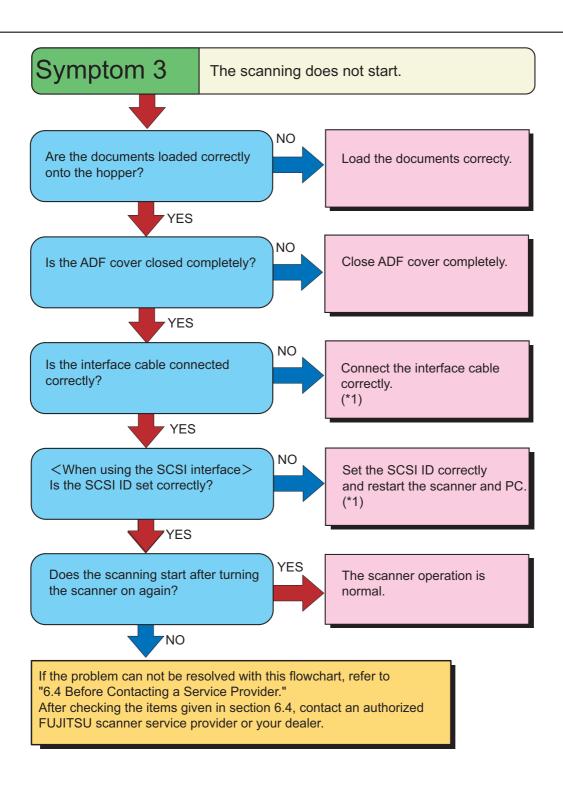


(*1) Refer to fi-5950 Getting Stated, "2.2 Connecting the scanner to your PC".

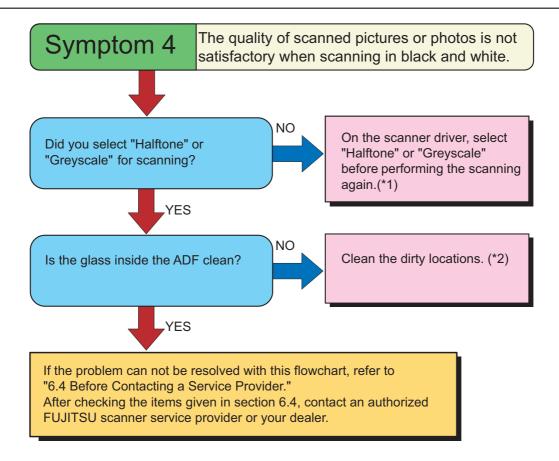


- (*1) When scanning pictures or photos simply with binary black and white, the generated image might differ from the original. If possible, set the image type on the scanner driver to "halftone" or "grayscale" before scanning.
- (*2) Refer to "4.5 Cleaning the Transport path and the sensors" on page 116.

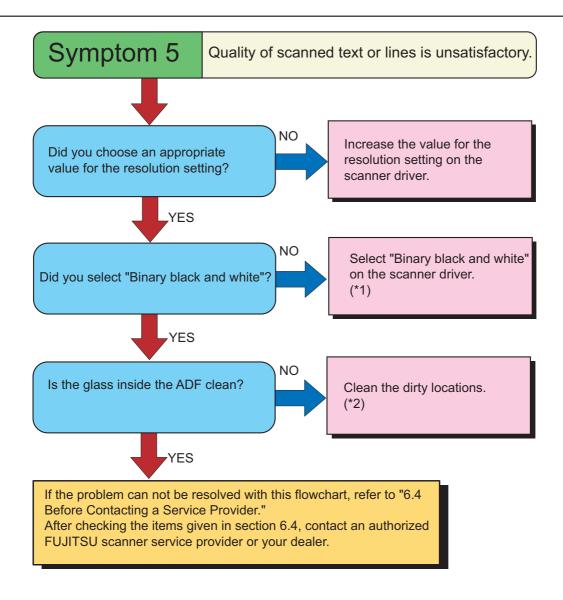


- (*1) When scanning with halftone, grey scale or color, the images might not become sharp and clear. If possible, set the image type on the scanner driver to "Binary black and white".
- (*2) Refer to "4.5 Cleaning the Transport path and the sensors" on page 116.

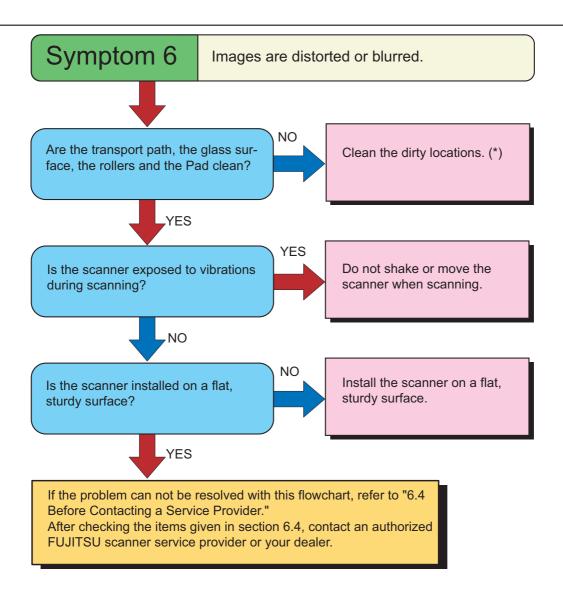


(*) Refer to "4 DAILY CARE" on page 105.

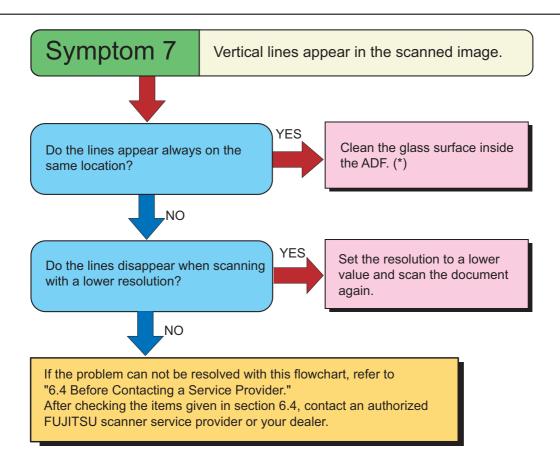



(*) Refer to "4.5 Cleaning the Transport path and the sensors" on page 116.

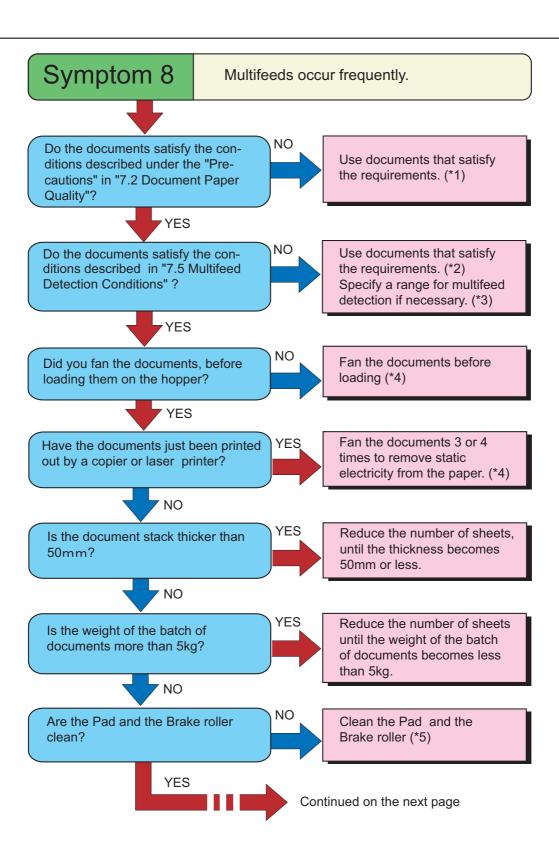

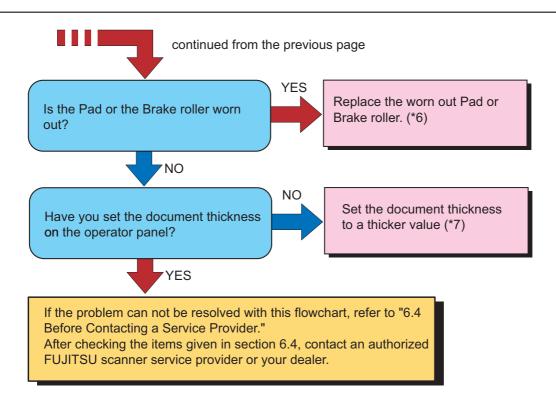


- (*1) Refer to "7.2 Document Quality" on page 161.
- (*2) Refer to "7.5 Multifeed Detection Conditions" on page 166.
- (*3) Refer to "3.7 Detecting Multifeeds" on page 84.
- (*4) Refer to "2.6 Loading Documents on the Hopper" on page 17.
- (*5) Refer to "4 DAILY CARE" on page 105.
- (*6) Refer to "5 REPLACEMENT OF CONSUMABLES" on page 121.
- (*7) Refer to "2.9 Setting the Paper Thickness" on page 29.

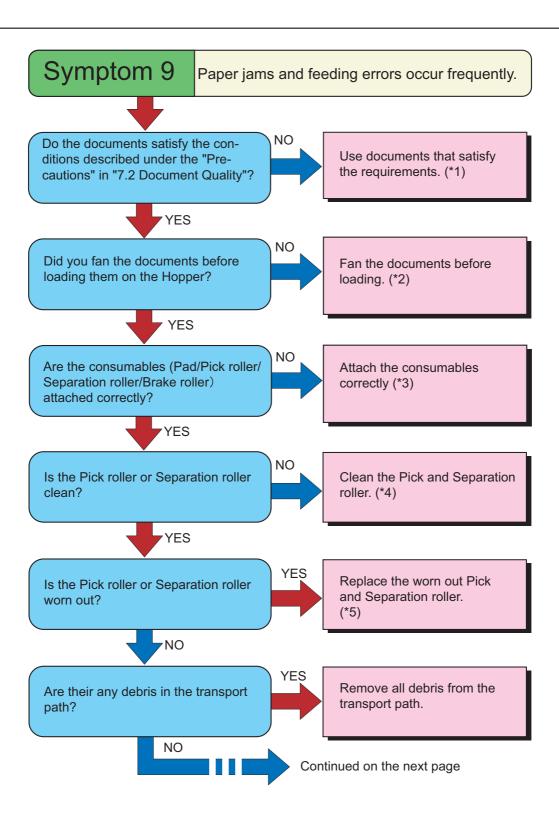


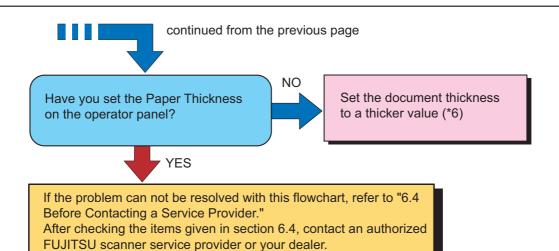

- (*1) Refer to "7.2 Document Quality" on page 161.
- (*2) Refer to "2.6 Loading Documents on the Hopper" on page 17.
- (*3) Refer to "5 REPLACEMENT OF CONSUMABLES" on page 121.
- (*4) Refer to "4 DAILY CARE" on page 105.
- (*5) Refer to "5 REPLACEMENT OF CONSUMABLES" on page 121.
- (*6) Refer to "2.9 Setting the Paper Thickness" on page 29.

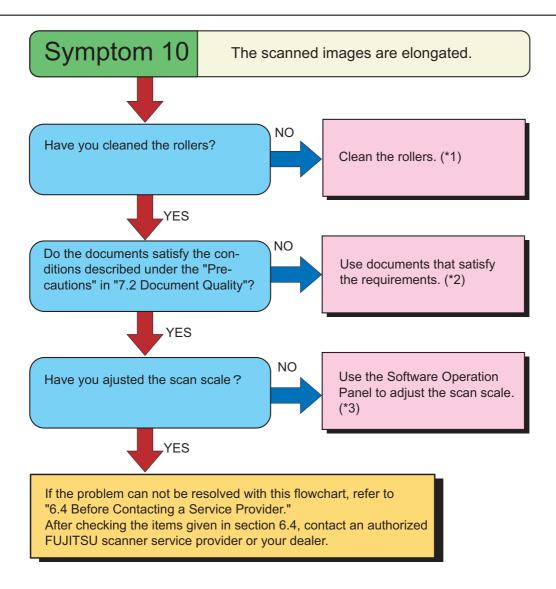

- (*1) Refer to "4 DAILY CARE" on page 105.
- (*2) Refer to "7.2 Document Quality" on page 161.
- (*3) Refer to "8 SCANNER SETTINGS" on page 173.

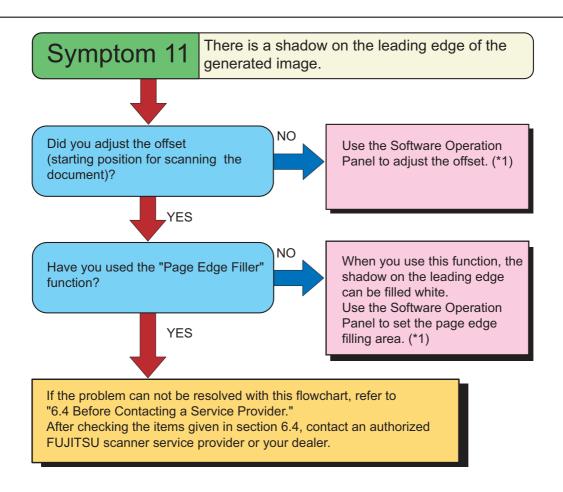

(*1) Refer to "8 SCANNER SETTINGS" on page 173.

6.4 Before Contacting a Service Provider

Check the following items before contacting an authorized FUJITSU Scanner service provider or the dealer where you bought the scanner.

■ General descriptions

Items to check	Information
Model	example: fi-5950 Check the labels on the scanner for the model name. Refer to "6.5 Labels on the Scanner" on page 157.
Serial Number	example: 000001 Check the labels on the scanner for the Serial Number. Refer to "6.5 Labels on the Scanner" on page 157.
Manufacturing date	example 2010-03 (March 2010) Check the labels on the scanner for the manufacturing date. Refer to "6.5 Labels on the Scanner" on page 157.
Date of purchase	
Symptom	
Frequency of trouble	
Do you have warranty for this product?	
Name of option product used	example fi-590PRF For more details about the options. Refer to "9.1 Options" on page 226.

■ Error Descriptions

■ Problem at the time of PC connection.

Items to check	Findings
OS (Windows) type	
Displayed error message	
Interface	(example) SCSI interface
Interface controller	(example) Adaptec SCSI Card 29160

■ Document feeding trouble

Items to check	Findings
Document type	
Main purpose of use	
Last cleaning date	
Last consumable replacement date	
Operator panel status at trouble	

■ Imaging quality trouble

Items to check	Findings				
Type and version of scanner driver					
Interface controller	(example) Adaptec SCSI Card 29160				
OS (Windows) type					
Application software	(example) ScanAll PRO				
Scanning side (s)	(example) font, back, duplex				
Resolution	(example) 600 dpi, 75 dpi				
Image mode	(example) Color, Grayscale, Binary (black & white)				


■ Others

Items to check	Findings
Can you send both the output results and photographs that show the condition of the document by e-mail or FAX ?	


6.5 Labels on the Scanner

This section describes how to check the labels on the scanner.

The following shows where the two labels are located on the scanner.

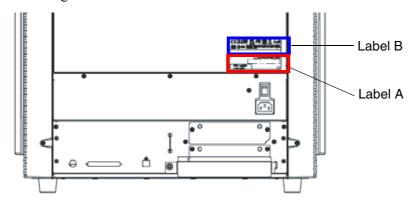

Label A (example): Indicates scanner information.

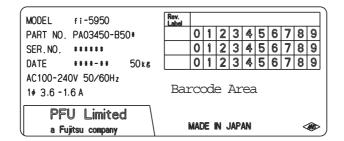

Label B (example): Indicates various standards that the scanner conforms with.




7 DOCUMENT SPECIFICATIONS

This chapter describes the sizes and qualities of documents required for the satisfactory performance of the scanner.

7.1 Document Size160
7.2 Document Quality161
7.3 Maximum Document Loading Capacity164
7.4 Hole-punching Prohibited Areas165
7.5 Multifeed Detection Conditions166
7.6 Background Color Areas168
7.7 Job Separation Sheet169
7.8 Scanning Mixed Documents170

7.1 Document Size

The following shows the supported document sizes.

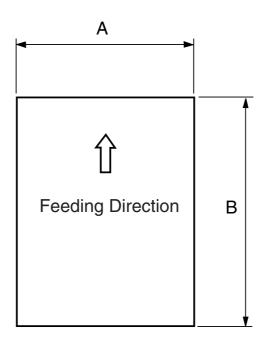

Maxi	mum	Minimum			
Α	В	Α	В		
304.8 mm 431.8 mm * (12 in) (17 in)		53 mm (2.087 in)	74 mm (2.913 in)		

*When scanning on "long page", following length is available.

- 201 dpi to 400 dpi: : 863 mm (34 in) - 200 dpi and under : 3,048 mm (120 in)

7.2 Document Quality

This section describes the types and thickness of documents this scanner supports.

■ Document type

The recommended document types are as follows.

- Wood free paper
- Wood containing paper

When using documents of a paper type other than the above, perform a test-scanning with a few sheets of the same type before executing the actual task in order to check whether or not the documents can be scanned.

■ Document thickness

Paper thickness is expressed by "paper weight." The following shows the paper weights that can be used on this scanner:

31 to 209 g/m² (For paper sizes equal or bigger than B4 : 52 to 157 g/m²)

■ Precautions

The following documents may not be scanned successfully.

- •Document of non-uniform thickness (e.g. envelopes and documents with photographs attached)
- •Wrinkled or curled documents (Refer to HINT on on page 163)
- •Folded or torn documents
- Tracing paper
- Coated paper
- Carbon paper
- Carbonless paper
- Photosensitive paper
- Perforated or punched documents
- •Documents that are not square or rectangular
- Very thin documents
- Photographs

Do not use the following documents:

- Paper-clipped or stapled documents
- •Documents on which the ink is still wet
- •Documents smaller than A8 or larger than A3
- •Documents other than paper such as fabric, metal foil, or transparencies



• When scanning semi-transparent documents, set the density to light to avoid a bleed through.

- To prevent the rollers from becoming dirty, avoid scanning documents containing large areas written or filled with pencil. If scanning of such documents is inevitable, clean the rollers more frequently.
- When feeding errors, paper jams and multifeeds occur frequently, refer to "2.9 Setting the Paper Thickness" on page 29.



 Carbonless paper contains chemical substances that may damage the Pad or rollers (e.g. Pick roller) when documents are fed. Pay attention to the following:

Cleaning:

If pick errors occur frequently, clean the Pad and the Pick roller. For details on cleaning the Pad and the Pick roller, refer to "4 DAILY CARE" on page 105.


Replacing parts:


The service life of the Pad and Pick roller may be shortened compared to the case of scanning wood containing paper documents.

- If paper containing wood is scanned, the service life of the Pad and Pick roller may become shorter than that of the Pad and Pick roller used for scanning only woodfree paper.
- The pad or rollers of the scanner could be damaged if photographs or sheets of paper attached to the scanned document have contact with the pad or rollers during scanning.
- Scanning documents of calendered paper such as photographs may damage the surface of them.




When using the ADF, the leading edge of all document sheets must be evenly aligned. Make sure that curling at the leading edge is within the following tolerances:

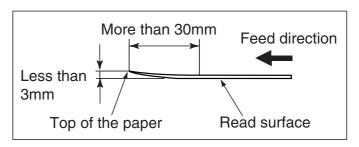

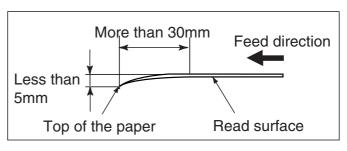

7.3 Maximum Document Loading Capacity

The maximum number of sheets that can be loaded on the ADF paper chute is determined by the size and weight of the documents. The following graph shows the maximum document loading capacity of ADF with respect to paper weight.

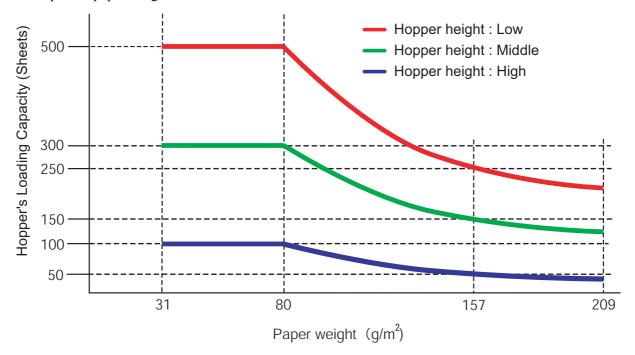


Paper weight conversion table

Unit	Conversion									
g/m ²	31	52	64	75	80	90	104	127	157	209
lb	10	14	17	20	21	24	28	34	42	56

7.4 Hole-punching Prohibited Areas

Punched holes in the shaded areas may cause errors.

For job separation sheet requirements, refer to "7.7 Job Separation Sheet" on page 169.

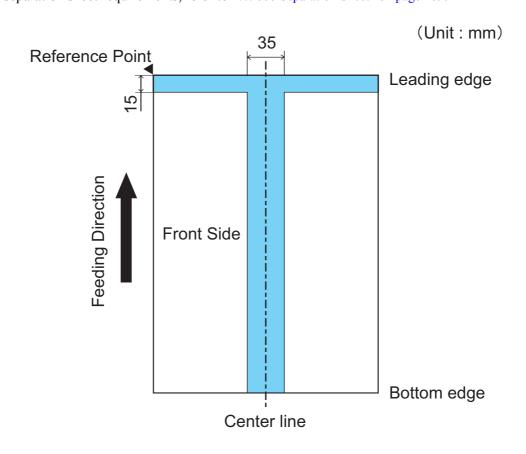



If there are any holes in the 35mm wide central column, you can set the document a bit to the left or right to avoid detecting error.

7.5 Multifeed Detection Conditions

The following describes the conditions required for Multifeed detection:

■ Check overlapping

- •Paper weight: 31 209 g/m² (8.3 to 56.1 lb)
- •Punched holes are not allowed within 35 mm (1.4 in) of the vertical lines of the center, right and left sides of the the document as shown in Fig. 1.
- •Other paper shall not be glued within 35 mm (1.4 in) of the vertical lines of the center, right and left sides of the the document as shown in Fig. 1.

■ Check length


(Load only documents of the same length onto the hopper.)


- •Document length deviation: 1% or less
- •Punched holes are not allowed within 35 mm (1.4 in) of the vertical center line of the document as shown in Fig. 2.

■ Check overlapping and length

(Load only documents of the same length and thickness onto the hopper.)

- •Paper weight: 31 157 g/m² (8.3 to 42 lb)
- •Document length deviation: 1% or less
- •Punched holes are not allowed within 35 mm (1.4 in) of the vertical lines of the center, right and left sides of the the document as shown in Fig. 1.
- •Other paper shall not be glued within 35 mm (1.4 in) of the vertical lines of the center, right and left sides of the the document as shown in Fig. 1.

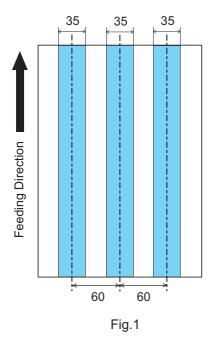

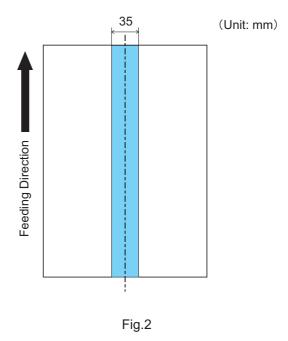




- When you want to detect overlapping, be sure that paper documents are not clinging to each other. Those clinging documents (glued or with static cling) may cause a lower multifeed-detection ratio.
- The area shown in Fig. 1 can be changed using the Software Operation Panel. For details, please refer to "8.4 Multifeed Detection" on page 193.

7.6 Background Color Areas

Paper white detection is performed in the shaded area as shown in the Figure below. The top 3mm on both sides of a document, should have no printing in this area.


When using dropout color, the color can be in this area. If this cannot be followed, turn the white level follower off when reading.

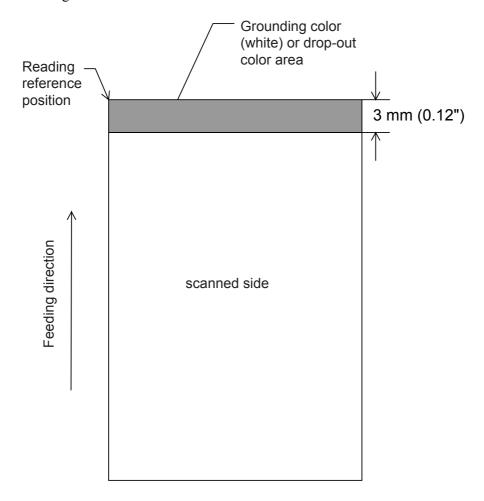

7.7 Job Separation Sheet

1. Shape

The following shows the typical format of the job separation sheet.

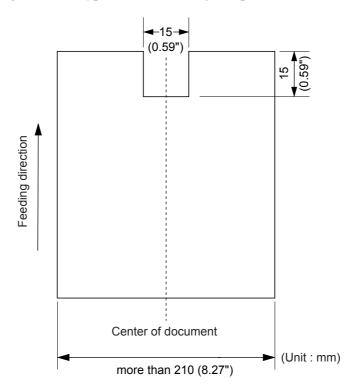

2. Document Specifications

Document width must be A4 width (210mm/8.27") or wider.

7.8 Scanning Mixed Documents

When scanning documents of different thickness/Friction Coefficients/sizes using this scanner, the following restrictions apply. Before you scan any mixed documents, always test scan a few pages to see if the mixed document can be properly fed.

(For details on how to scanning mixed documents, refer to "3.3 Scanning Documents with different widths" on page 72.)

Types of Documents

It is recommended to align the paper direction (how the fibers are lying in the sheet) with the feeding direction.

■ The Thickness of Documents

The mixed documents' paper weight (thickness) should be in the range below:

31 to 209g/m² (8.3 to 56.1lb; 0.04 to 0.25mm)

For paper sizes equal or bigger than B4: 52 to 157 g/m² (14 to 42 lb)

■ The Friction Coefficients

Paper of same manufacturer's same brand is recommended. When paper of different manufacturers/ brands are mixed, the differences of their friction coefficients become very large, which will adversely affecting the feeding performance.

Generally speaking, the friction coefficients of different kinds of paper shall be in the range of 0.35 - 0.64.

■ Document Sizes

Refer to the table below when mixing documents of different sizes.




- When scanning mixed size document, because the hopper side guides will not function, the scanned images are easily skewed.
 - We recommend you to enable "Automatic Page Size Detection".
- Multifeed Detection by length cannot be used together with "Automatic Page Size Detection".

Maxi	Maximum Size		А3	DL	В4	LTR	A4	B5	A 5	В6	A6	В7	A7	В8	A8
	Widt	h(mm)	297	279	257	216	210	182	149	129	105	91	74.3	64.3	52.5
	А3	297													
	DL	279													
	B4	257													
	LTR	216													
0	A4	210													
Minimum size	B5	182													
imun	A 5	149													
Min	В6	129					Mixir	ng Pos	sible						
	A6	105													
	B7	91													
	A7	74.3													
	B8	64.3													
	A8	52.5													

DL: 11×17 in., LTR: Letter size.

Because of friction, smaller document under larger document will be moved when the larger document is being picked up, adversely affecting feeding performance.

When setting the document, try to meet the following condition:

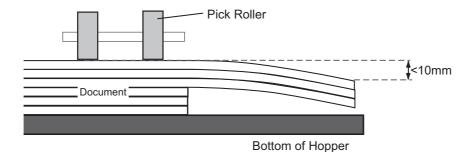

8 SCANNER SETTINGS

This chapter explains the how settings can be done for the scanner using the Software Operation Panel.

B.1 Scanner Settings175
3.2 Power saving setting190
8.3 Offset/Scan scale191
8.4 Multifeed Detection193
8.5 Multifeed detection when scanning in manual feed mode198
8.6 Page Edge Filler (ADF)199
8.7 Dropout Color201
8.8 Pre-Pick202
8.9 Page Edge Filler (Automatic Page Size Detection)203
8.10 Intelligent Multifeed Function205
8.11 Paper feeding retry times206
8.12 Retaining current paper thickness after Power off207
8.13 Cleaning Cycle208
8.14 Life counter setting209
8.15 Document clearance setting210
8.16 Thin Paper Mode211
8.17 Soft Pick Setting212
8.18 Paper Jam Detection213
8.19 AutoCrop Boundary214
8.20 Auto Color Detection215
8.21 Alarm Setting216

8.22	Jam Detection Outside of Scannable Area When Transporting paper	217
8.23	Imprinter Selection	218
8.24	Timeout for Manual Feeding	219
8.25	Scan Setting for Document with Tab	220
8.26	Paper Stop Position at Multifeed Error	221
8 27	Overscan Control	222

8.1 Scanner Settings

The Software Operation Panel will be installed together with the scanner driver (TWAIN driver/ISIS driver).

With this application, you can configure settings and functions for the fi-5950.




- Do not use the operator panel while the Software Operation Panel is running.
- Software Operation Panel cannot start up when multiple scanners are connected. Connect only one scanner at a time.


■ Start up the Software Operation Panel

Start up via PC

- 1. Confirm if the scanner is connected correctly to the PC, then power on the scanner.
- 2. From the [Start] menu, select [All Programs] [Scanner Utility for Microsoft Windows] [Software Operation Panel].

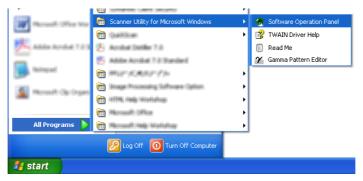

⇒ The [Software Operation Panel] window will be displayed.

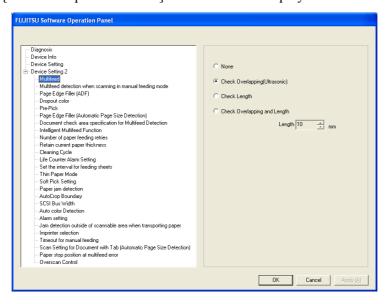


Start up via Scanner

- 1. Confirm if the scanner is connected correctly to the PC, then power on the scanner.
- 2. Press the [Function] button on the Operator Panel. The Function Number Display will show .

When pressing the [Function] button, the Function Number Display will change in the following way: $[1] \rightarrow [2] \rightarrow ... \rightarrow [9] \rightarrow [C]$.

- 3. Press the [Send to] button.
 - ⇒ The [Software Operation Panel] window will be displayed.

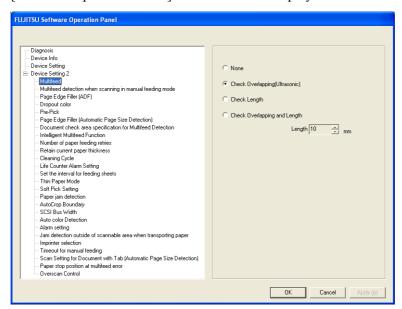

■ Password Setting

By setting a password, the Software Operation Panel can run in [View Only mode] which allows users to only view the scanner settings.

The scanner settings can be configured if no password is set.

In order to prevent unnecessary changes to the settings, a password can be used to restrict user operations.




- 1. The user must configure password settings and perform initialization.
- 2.Keep the password you set written down in order not to forget it.

Setting a Password

Set a password in the following procedure.

1. Right-click the Software Operation Panel icon in the taskbar, and select [Password Setting] from the menu.

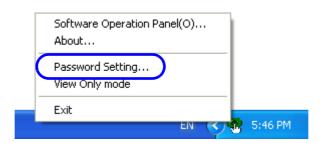

⇒ The [Password setting] dialog box appears.

2. Enter a password then again to confirm, and click the [OK] button.

Up to 32 characters can be used for the password.

Note that only alphanumeric characters (a to z, A to Z, 0 to 9) are allowed.



 \Rightarrow A message dialog box appears.


3. Click the [OK] button.

 \Rightarrow The password is set.


Setting the [View Only mode]

Set the Software Operation Panel to [View Only mode] in the following procedure.

- 1. Set a password.
 - ⇒ For details, refer to "Setting a Password" on page 177.
- 2. Right-click the Software Operation Panel icon in the taskbar, and select [View Only mode] from the menu.

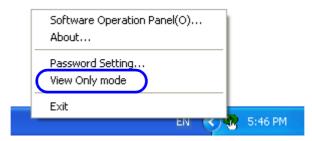


⇒ The Software Operation Panel enters the [View Only mode].

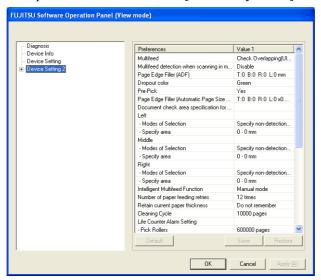



In [View Only mode], a check mark appears next to [View Only mode] in the menu that is displayed by right-clicking the Software Operation Panel icon.


• • • • • • • • • • • • • • • • • • • •

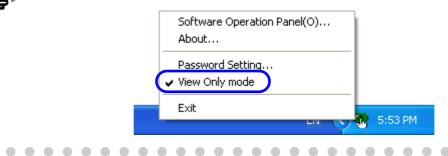

Clearing the [View Only mode]

Clear the [View Only mode] in the following procedure.


1. Right-click the Software Operation Panel icon in the taskbar, and select [View Only mode] from the menu.

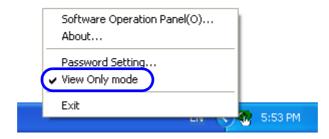

- ⇒ The [Password setting] dialog box appears.
- 2. Enter the password and click the [OK] button.




⇒ [View Only mode] is cleared, and the scanner settings can now be changed.

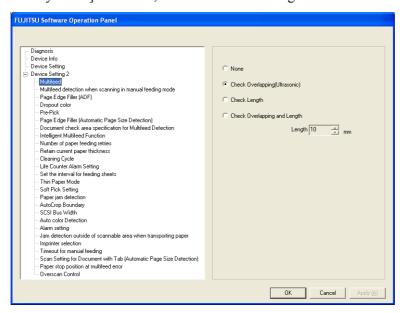




When you exit [View Only mode], the check mark next to [View Only mode] disappears from the menu that is displayed by right-clicking the Software Operation Panel icon.

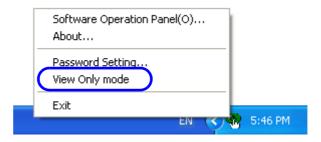

Changing the Password

Change the password in the following procedure.

1. Right-click the Software Operation Panel icon in the taskbar, and select [Password Setting] from the menu.

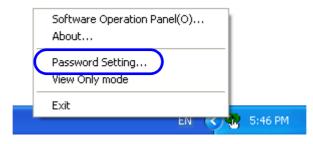

- ⇒ The [Password setting] dialog box appears.
- 2. Enter the current password and click the [OK] button.



- ⇒ The [Password setting] dialog box appears.
- 3. Enter a new password then again to confirm, and click the [OK] button.

Up to 32 characters can be used for the password.

Note that only alphanumeric characters (a to z, A to Z, 0 to 9) are allowed.




- \Rightarrow A message dialog box appears.
- 4. Click the [OK] button.
 - \Rightarrow The password is set.

Clearing the Password

Clear the password in the following procedure.

1. Right-click the Software Operation Panel icon in the taskbar, and select [Password Setting] from the menu.

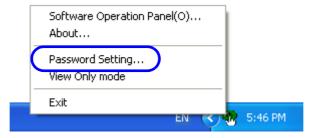

- ⇒ The [Password setting] dialog box appears.
- 2. Enter the password and click the [OK] button.



- ⇒ The [Password setting] dialog box appears.
- 3. Leave both fields blank and click the [OK] button.




- \Rightarrow A message dialog box appears.
- 4. Click the [OK] button.
 - \Rightarrow The password is cleared.

Resetting the Password

In case you forgot your password, it can be reset in the following procedure.

1. Right-click the Software Operation Panel icon in the taskbar, and select [Password Setting] from the menu.

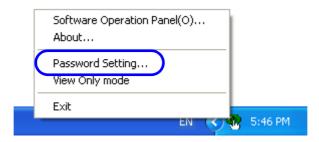

- ⇒ The [Password setting] dialog box appears.
- 2. Enter the default password which is "fi-scanner", and click the [OK] button.



- ⇒ The [Password setting] dialog box appears.
- 3. Enter a new password then again to confirm, and click the [OK] button.

Up to 32 characters can be used for the password.

Note that only alphanumeric characters (a to z, A to Z, 0 to 9) are allowed.



- \Rightarrow A message dialog box appears.
- 4. Click the [OK] button.
 - \Rightarrow The password is set.


■ Settings

Using the Software Operation Panel, you can configure the following settings for the scanner connected to the PC.



In View Only mode, the Software Operation Panel cannot be set. For details on "View Only mode", refer to "Password Setting" on page 177

[Device setting]

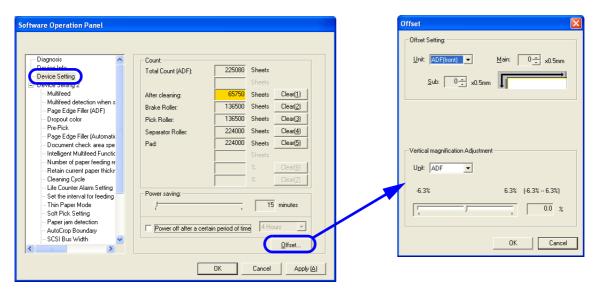


Item	Explanation	Selectable parameter	Default
Sheet count (Consumables counter)	For evaluating the consumable replacement cycle or cleaning cycle. Use this function to reset the counters after replacing consumables or the cleaning. Refer to "5.1 Consumables and Replacement Cycle" on page 122.	After Cleaning/Pad/Pick roller/Separator Roller/Brake roller/Remaining ink level (only for the imprinter option)	-
Power saving	Select the waiting time before entering the Power saving mode. Refer to "8.2 Power saving setting" on page 190.	Setting range 15 to 55 minutes (set in steps of 5 min.)	15 min.
	Power off after a certain period of time: Select to have the scanner turn	[Power off after a certain period of time] check box	(*1)
	off automatically when it is turned on and left unused for a certain period of time. Also, specify the time until power-off. Refer to "8.2 Power saving setting" on page 190.	1 Hour/2 Hours/4 Hours/8 Hours (when the above check box is selected)	
Offset setting	Adjust the start position for the document scanning. Refer to "8.3 Offset/Scan scale" on page 191.	Left right: setting range -2 to 3mm (set in 0.5mm steps) Up down: setting range -2 to 3mm (set in steps of 0.5mm)	left right 0mm up down 0mm
Vertical magnifi- cation Adjustment	Adjust the magnification in the feeding direction. Refer to "8.3 Offset/Scan scale" on page 191.	Setting range -6.3% to 6.3% (set in 0.1% steps)	0%

*1: Depending on the "PART NO." on the product label, the factory default setting differs as follows:

PART NO.	Default
PAxxxxx-Bxx1	Selected / 4 Hours
PAxxxxx-Bxx2 /Bxx3 /Bxx5 /Bxx7	Not selected

For details about product labels, refer to "6.5 Labels on the Scanner" on page 157.

[Device settings 2]

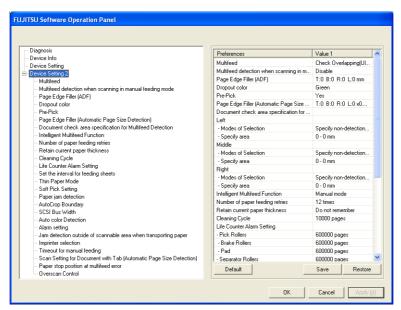

Selecting each item displays detailed settings (parameters) in the right part of the dialog box.

Item	Explanation	Selectable parameter	Default
Multifeed "Section 8.4"	Select the method to detect Multifeed. (Check either of overlapping or document length, or both of document length and overlapping)	None/Check Overlapping [Ultrasonic]/Check Length/ Check Overlapping and Length. Selectable length (to be detected as length difference): 10, 15 or 20mm	Check overlapping
Multifeed detection when scanning in manual feeding mode "Section 8.5"	Multifeed can be detected by this setting, even if the manual feeding is set.	Disable/Follow driver settings	Disable
Page Edge Filler (ADF) "Section 8.6"	Fill the end sections of a specified-mm-wide with white or black on the scanned image. When the backing (background) color is white, the end sections are filed with white; and when the background color is black, filled with black.	Top/left/right: 0 to 15mm Bottom: -7 to 7mm (can be set in increments of 1mm) A (A: Image area B: Filled area A+B: Area to be output)	Top/Bottom/ Left/Right: 0mm

Item	Explanation	Selectable parameter	Default
Dropout color "Section 8.7"	Drop out a preselected color for the scanned image. (Binary black & white/grayscale mode only)	Red/Green/Blue/None	Green
Pre-Pick "Section 8.8"	To give a higher priority to processing speed, select [Yes], if not, select [No].	Yes/No	Yes
Page Edge Filler (Automatic Page Size Detection) "Section 8.9"	Fill the end sections of a specified-mm-wide with white when the paper size is automatically detected. The end sections of a specified-mm-wide are filled with white.	Top/Left/Right/Bottom: 0 to 7.5mm (can be set in increments of 0.5mm) A (A: Image area B: Filled area	Top/Bottom/ Left/Right: 0mm
Decument shoot	C.1. 4.1 This is also 1.1.1.1	A+B: Area to be output)	NI - 4 - 1 1 4
Document check area specifica-	Selected range: This is checked to make following checking area specification effective.	Selected range	Not checked
tion for Multifeed Detection "Section 8.4"	Enable/Disable: Specifies whether left/mid-dle/right each ultrasonic sensor is enabled or disabled.	Enable/Disable	Invalid
	Start: The start point of the check area in length (mm) from top edge of the document is specified.	0 to 510 mm, with 2 mm increment	0 mm
	End: The end point of the check area in length (mm) from top edge of the document is specified.	0 to 510 mm, with 2 mm increment	0 mm
Intelligent Multi- feed Function "Section 8.10" "Section 3.12"	When a fixed size of paper is pasted on the same location in multiple sheets, the scanner can memorize the size and location of the pasted paper so it will not be detected as a multifeed. To use this function, you need to select [Check Overlapping] as the multifeed setting by the procedure described in "Section 3.7" or "Section 8.4" in advance.	Manual mode/Auto mode 1/ Auto mode 2	Manual mode
	Specify whether or not to remember the multifeed pattern at power-off.	Remember/Do not remember	Do not remember
Number of paper feeding retries "Section 8.11"	This is specified to decrease picking retry times for earlier jam detection.	1 to 12 times	12 times

Item	Explanation	Selectable parameter	Default
Retain current paper thickness "Section 8.12"	The Paper thickness setting on the Operator panel is memorized and displayed after turning off and on the power.	Remember/Do not remember	Do not remember
Cleaning Cycle "Section 8.13"	The cleaning cycle of the scanner is specified by this setting. When Page counter (Consumable counter) exceeds the value specified here, the background color of the counter becomes yellow, and the message to ask user to clean the scanner may appear.	1,000 to 255,000 sheets,with 1,000 sheets increment Show cleaning instructions: Yes/No	10,000 sheets No
Life Counter Alarm Setting "Section 8.14"	When the sheet count (Consumable counter) described in Section 5.2 exceeds the value specified here, the counter background color changes to yellow.	For each consumable 10,000 to 2,550,000 with 10,000 increment	600,000 sheets
Set the interval for feeding sheets "Section 8.15"	If the document is skewed and a section of the scanned image will be cut off, Automatic Page Size Detection automatically selects a page size to ensure that all the image is scanned successfully. As a result, scanning time may take longer due to the page size selected.	4 steps from Short (Default) to Long	Short
Thin Paper Mode "Section 8.16"	To scan thin paper documents, enable this mode.	Disable/Thin paper mode/ Super-thin paper mode	Disable
Soft Pick Setting "Section 8.17"	When a number of sheets are picked at a time and multi-feed is detected frequently, this setting may be effective.	Enable/Disable	Disable
Paper jam detection "Section 8.18"	Specify the degree of jam detection at the feeder.	Normal/Sensitivity-Low	Sensitivity- Low
AutoCrop Boundary "Section 8.19"	Specify the AutoCrop Boundary processing for when "Automatic Page Size Detection" is selected.	Round Up/Round Down/Optimize	Round Down
Auto color Detection "Section 8.20"	Specify the slice level for automatically detecting Color/Monochrome	1 to 255 (steps)	5
Alarm setting "Section 8.21"	For the beeper to sound the alarm of a paper jam or multifeed, select Alarm at error.	Disable alarm/Enable alarm	Disable alarm
Jam detection outside of scan- nable area when transporting paper "Section 8.22"	By selecting "Enable", such a case in which the document is fed outside the scannable area due to abnormal skew can be judged as a paper jam.	Enable/Disable	Disable
Imprinter selection "Section 8.23"	Select the Pre-imprinter option or the Post-imprinter option if you have installed the options (to be purchased separately).	Normal (obey Host specification)/Forcibly select Preimprinter/Forcibly select Postimprinter	Normal (obey Host specifica- tion)

Item	Explanation	Selectable parameter	Default
Timeout for man- ual feeding "Section 8.24"	Specify the standby time period. After the predetermined time period has elapsed, manual feeding mode is canceled.	5, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 180, 240, 300, 360, 420, 480, 540, 600, 900, 1200, 1800, 1999 (seconds)	10 seconds
Scan Setting for Document with Tab(Automatic Page Size Detec- tion) "Section 8.25"	When the document has tab on the bottom edge of the image, the tab image remains even if the document is scanned with Automatic Page Size Detection. When "Tab-attached document" is specified, the tab image remains in the scanned data but the scanning speed may be rather slow.	Document with tab/Document without tab	Document without tab
Paper stop position at multifeed error "Section 8.26"	When a multifeed error is detected by over- lapping of documents, the position to stop the documents on which the multifeed occurred can be selected.	Normal / Paper output slot	Normal
Overscan Control "Section 8.27"	Specify the optimal amount of black margins for overscan.	Normal / Optimize	Normal


[Default] button

Resets the current settings to the factory setting.

[Save]button

Saves contents of various settings onto the computer.

(Use this button to apply the same settings to other fi-5950 scanners.)



Saving outputs the EEPROM value currently written in the scanner. Click the [Apply] button first if you have changed the value immediately before saving.

[Restore] button

Restores contents of the settings saved onto the computer back to the scanner.

8.2 Power saving setting


When not using this scanner for a certain time, it will enter automatically the power saving mode.

Configure the Power saving mode as follows:

1. Start up the Software Operation Panel.


Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting] from left side list in the window.

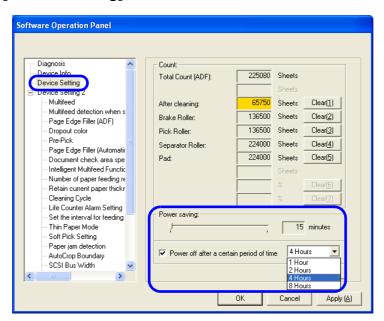

3. Use the slide control bar to set the waiting time before entering the power saving mode.

Setting range 15 - 55 minutes. (Set in steps of 5 minutes)



When you select the [Power off after a certain period of time] check box, the scanner will turn itself off automatically if it is turned on and left unused for the set time. The time until power-off can be selected from 1/2/4/8 hours.

8.3 Offset/Scan scale

When the position of the scanned image is not correct or the image is elongated, use the following procedure to adjust the Offset and the Scan scale for correction.




The factory default setting are appropriate, so normally there is no need to make any adjustment.


1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting] from left side list in the window, and press [Offset...].

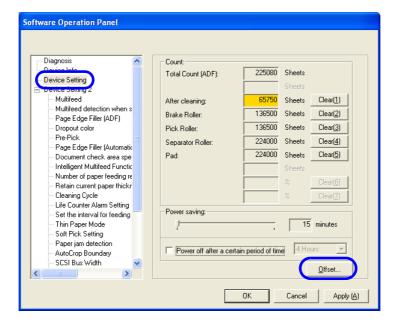

3. Adjust the Offset/Scan scale as necessary.

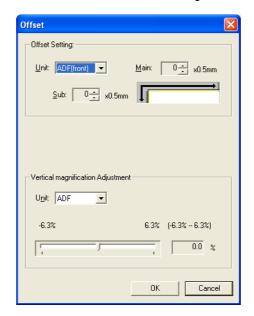

Offset Setting

Unit: Select ADF front or ADF back as target.

Main: Adjusts the horizontal Offset.

Setting range -2mm to +3mm, in steps of 0.5mm.

Sub: Adjusts the vertical Offset.

Setting range -2mm to +3mm, in steps of 0.5mm.

Vertical magnification

Adjustment

Unit: Select ADF front or ADF back as target.

-6.3%/6.3%: Adjusts the vertical (document length) Scan scale.

Setting range -6.3% to +6.3%, in steps of 0.1%.

8.4 Multifeed Detection

Multifeed refers to the phenomenon, when two or more documents are fed overlapping at once into the scanner.

This may cause the loss of important data.

To prevent this, this scanner is equipped with a Multifeed detection function.


When function is activated, a message will be displayed and the scanning interrupted in case a Multifeed has been detected.

Configure the settings for the Multifeed detection as follows.

Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Multifeed] from its lower level.

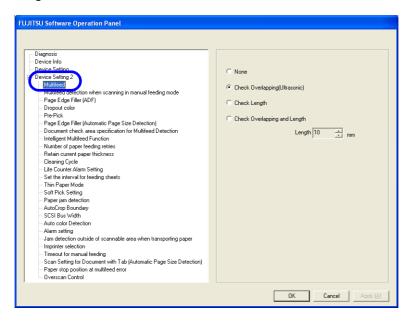

3. Select the detection method.

None : No Multifeed detection will be performed.

Check Overlapping (Ultrasonic)

Check Overlapping: Document overlapping will be monitored.

When this method is slected, two more options are available specified by other sections.

- Multifeed detection areas can be narrowed separately for left/middle/right Ultrasonic sensors to avoid unintensional multifeed detection of sticked photograph or something on the document. To specify this, go to Step 4.
- If photograph or something is sticked on the document and its size and/or position are same, you can easily let the scanner memorize its size and/or position just scanning those document. To use this function, go to Section "8.10 Intelligent Multifeed Function" or Section "3.12 Not detecting Multifeed for fixed format"

Check Length: : The difference of the documents length will be monitored.

Check Overlapping: [Check Overlapping] and [Check Length], both parameters will be used for monitorand Length ing the fed documents.

Length

: When checking the document length, select the length difference for which a Multifeed will be detected. Select 10/15/20mm. If the detected document length is smaller than the selected size, it will be recognized as a Multifeed.




• When scanning documents of different length together in the same stack, select [Checking Overlapping].

- If something is glued to the documents (stamps, memo or photos), they will be recognized as Multifeed when using [Checking Overlapping]. When scanning such documents, use [Checking Length] instead. However, when using the [detection area/none-detection area] function, you can also use [Checking Overlapping].
- The setting above can be done as well on the scanner driver configuration window.

(In this case, the scanner driver selection will have priority)


Following setting is available only when [Check Overlapping] is specified above.

4. Select [Device Setting 2] from left side list in the window, and select [Document check area specification for Multifeed Detection] from its lower level.

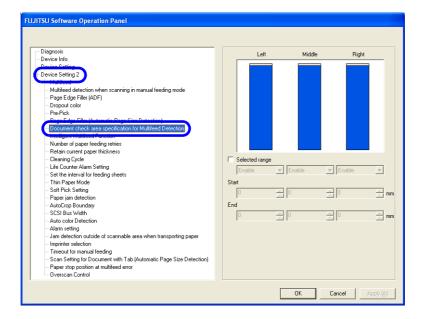

5. Speficy the detection area.

Selected range: Add check mark to this checkbox first. The following setting becomes available.

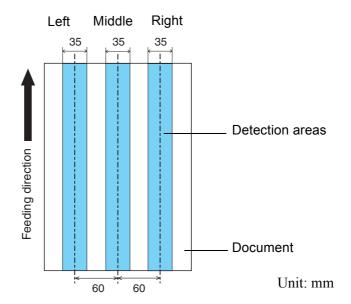

Enable/Disable: Select [Enable], if the area from [Start] to [End] is a Multifeed detection area. Select

[Disable], if the area from [Start] to [End] is not a Multifeed detection area, but other

area is a Multifeed detection area.

Start : You can specify the starting position of the selected range by the length from the

edge of the paper document.

Range: 0 to 510mm, in increments of 2mm, Start position<End position

End : You can specify the ending position of the selected range by the length from the edge

of the paper document.

Range: 0 to 510mm, in increments of 2mm, Start position<End position




 When both "Start" and "End" positions are set to 0 (zero), a multi feed error will be detected over the whole area, regardless of the setting of "Enable" or "Disable".

- If you wish to deactivate the detection for all of the areas, please select "Disable" and set "Start" to 0 (zero), while choosing a value greater or equal than the document length for "End".
- If "Start" is set to a value beyond the size of a document, the detection area is as follows:
 - When "Disable" is selected: The whole area of the document is the detection area.
 - When "Enable" is selected: Multi feed detection is disabled.
- For the multi feed detection, it is necessary to specify the range for the length to at least 5 mm.
 - Please perform the setting for the detection area so, that following condition is met:
 - ["End:" position] ["Start:" Position] ≥ 6mm
- You can also specify the check area by the following other methods.
 - By dragging the mouse on the setting area window to create rectangular
 - -By moving the edge grip at Start or End in the setting area


Setting Example 1:

Left, Disable, Start=50 mm, End=200 mm Middle, Enable, Start=50 mm, End=200 mm Right, Disable, Start=50 mm, End=200 mm

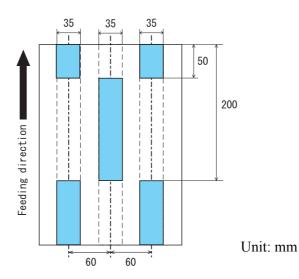

Setting Example 2:

Left, Disable, Start=0 mm, End=300 mm Middle, Enable, Start=0 mm, End=0 mm Right, Disable, Start=0 mm, End=0 mm

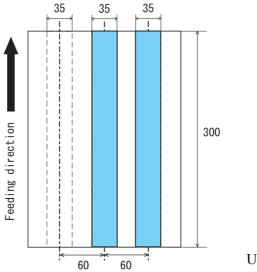

Unit: mm




When you want to detect overlapping, be sure that paper documents are not clinging to each other. Those clinging documents (glued or with static cling) may cause a lower multifeed-detection ratio.

.

Setting Example 3 (showing a setting which should not be done):

0 0 0 0

Left, Disable, Start=310 mm, End=400 mm Middle, Enable, Start=320 mm, End=450 mm Right, Enable, Start=100 mm, End=102 mm

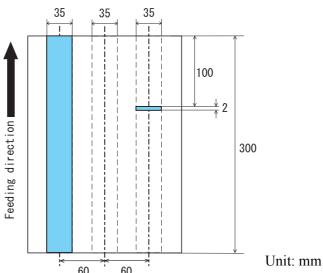

^{*} Since the range for the detection area (length) on the right does not meet 5mm, the multifeed detection cannot be performed correctly.


8.5 Multifeed detection when scanning in manual feed mode

Set whether to detect multifeed during manual feed mode or not.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Multifeed detection when scanning in manual feeding mode] from its lower level.

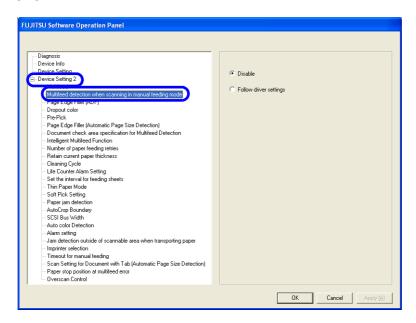

3. Select one of the following option.

Disable : Does not detect multifeed at manual feed mode.

Follow driver settings : Multifeed detection is valid only when device driver allows multi-

feed detection.

8.6 Page Edge Filler (ADF)

Depending on the state of the documents, the shadow of the scanned document appears in the end portion of the output image and black thin lines may be generated.


If this is the case, you can improve the output image by using the "Page Edge Filler" function. This function fills the end portion of the image so that it looks clean.

Configure the settings for the Page Edge Filler as follows:


1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Page Edge Filter (ADF)] from its lower level.

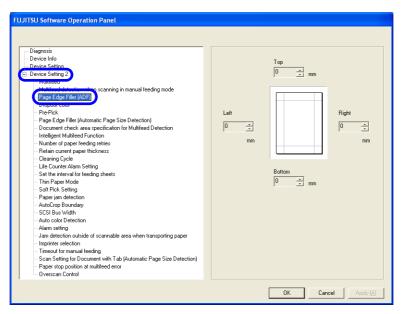

3. Specify the length for each end section; top, bottom, right, and left, to fill the end sections.

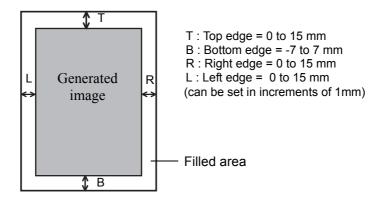

The specified areas are filled with white when the backing (background) is white, and with black when the backing is black.



Unless otherwise specified, the background color is white. You can also change it to the "Black background" using the scanner driver.

If you are using the TWAIN driver, do the following to change the background color to black: Select the [Option] button, and then select [Black background] from [Automatic Size and Skew detection] on the [Rotation] tab.



Note that if the Page Edge Filler is too wide, some characters in the vicinity of the boundary may be cut out.

When "Automatic Page Size Detection" is set, "Page Edge Filler (Automatic Page Size Detection)" automatically becomes valid instead of this setting.

8.7 Dropout Color

By using the "Dropout Color" function, you can scan documents with the specified color removed from the light's three primary colors, or red, green, blue.


(This function is available for the binary black and white setting as well as the grayscale setting.) For example, you can scan only the black part of letters when scanning the document containing black letters each with a green frame.

Configure the settings for the Dropout Color as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Dropout Color] from its lower level.

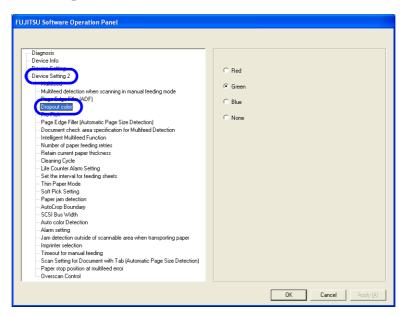

3. Select a color to drop out.

Red, Green, Blue: Red, green, or blue is dropped out.

None: No dropout occurs.



The Dropout Color setting can also be configured using the scanner driver setting window. (The scanner driver setting window is given a priority over Software Operation Panel.)

When configuring the setting through Software Operation Panel, you cannot select other colors than red, green, and blue. If you want to drop out any other colors, use the scanner driver setting window.

For details on how to configure settings through the scanner driver setting window, refer to "3.4 Excluding a Color from the image (drop out color)".

8.8 Pre-Pick

To scan documents consecutively, you can previously pick the document to be scanned next. This operation is called Pre-Pick.


By enabling Pre-Pick, the time interval between the scanning of two separate documents can be shortened.

Configure the settings for the Pre-Pick as follows:

1. Start up the Software Operation Panel.


Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Pre-Pick] from its lower level.

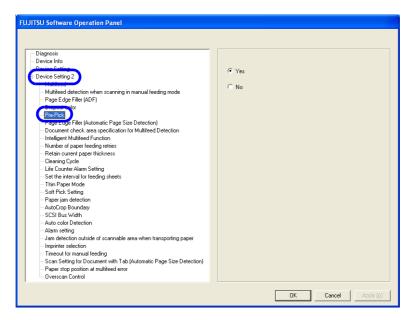

3. Select "Yes" or "No" for Pre-Pick.

Select "Yes" to make Pre-pick valid, and select "No" to make it invalid.



By enabling Pre-Pick, faster scanning can be achieved.

While Pre-Pick is valid, if you cancel scanning in process, you have to reload the document after ejecting all the pre-picked document.

 This setting is also available by device driver setting. In this case device driver setting has a priority to the setting by this section.

8.9 Page Edge Filler (Automatic Page Size Detection)

When the scanner is set to detect paper size automatically, depending on the state of the documents, the black frame may be generated on the output image.


If this is the case, you can improve the output image by using the "Page Edge Filler (Automatic Page Size Detection)" function. This function fills the end portion of the image with white so that it looks clean.

Configure the settings for "Page Edge Filler (Automatic Page Size Detection)" as follows:


1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Page Edge Filter (Automatic Page Size Detection)] from its lower level.

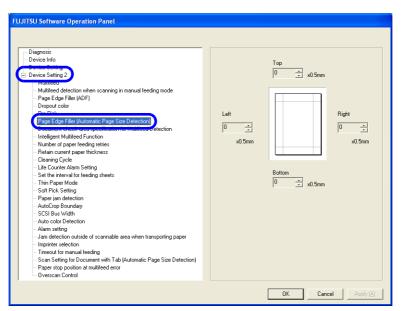

3. Specify the Top, Bottom, Right, and Left widths to fill.

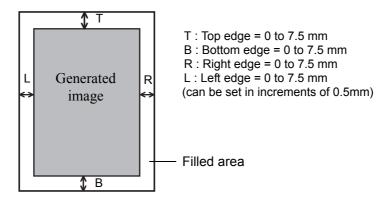

The specified range is filled with white.



The "Automatic Page Size Detection" setting can be configured on the scanner driver setting window.

For details on how to set the setting, refer to "3.8 Correcting skewed Documents" on page 86.



Note that if the Page Edge Filler is too wide, some characters in the vicinity of the boundary may be cut.

When you scan the document based on the other settings than "Automatic Page Size Detection", "Page Edge Filler (ADF)" automatically becomes valid instead of this setting.


8.10 Intelligent Multifeed Function

When a fixed size of paper is pasted on the same location in multiple sheets, the scanner can memorize the size and location of the pasted paper so it will not be detected as a multifeed. To use this function, you need to select [Check Overlapping] as the multifeed setting by the procedure described in "Section 3.7" or "Section 8.4" in advance.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Intelligent Multifeed Function] from its lower lebel.

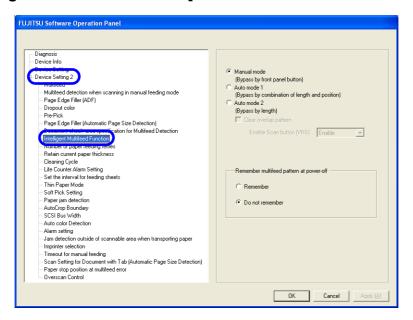

- 3. Select one of the following option and press [OK]. Refer to Section 3.11 for subsequent proceduers.
 - Manual mode: Scanner detects multifeed and stops document feeding. User can specify whether to bypass the multifeed or not, and starts scanning by pressing [Scan] button.
 - Auto mode 1 : Scanner detects multifeed and stops document feeding. The length and position of the sticked paper is memorized by restarting the scanning. Multifeed is bypassed, if the same-length paper is sticked at the same position on the document.
 - Auto mode 2 : Scanner detects multifeed and stops document feeding. The length of the sticked paper is memorized by restarting the scanning. Multifeed is bypassed, if the sticked paper is same or smaller than memorized length.
- 4. Specify whether or not to remember the multifeed pattern at power-off under [Remember multifeed pattern at power-off].

Selecting [Remember] allows you to use the last-remembered multifeed pattern before power-off. (Eight patterns can be memorized at power-off.)


8.11 Paper feeding retry times

This is specified to decrease feeding (picking) retry times to detect jam earlier.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Number of paper feeding retries] from its lower level.

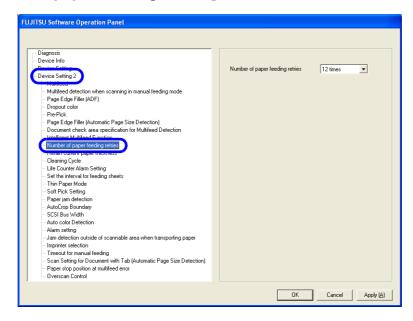

3. Specify retry times from 1 to 12.


8.12 Retaining current paper thickness after Power off

The Paper thickness setting on the Operator panel is memorized and displayed after turning off and on the power.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Retain current paper thickness] from its lower level.

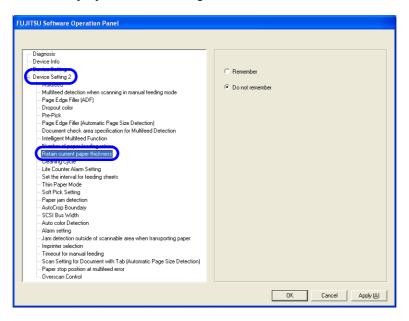

3. Specify whether to remember the setting or not.

If [Remember] is specified, the paper thickness setting at power off is used at next power on.


8.13 Cleaning Cycle

The cleaning cycle of the scanner is specified by this setting. The background color of the counter on page 126 changes to yellow when the sheet count exceeds the value specified here. A message that prompts cleaning may also appear as described in Section "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Cleaning Cycle] from its lower level.

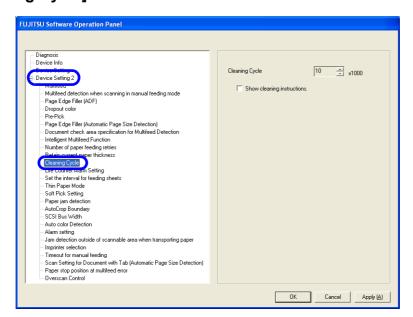

3. Specify the cleaning cycle to change the background color for each consumable.

Setting is available from 1,000 to 255,000 with 1,000 increment. Default is 10,000. Also, specify whether to display the message to ask operator clean the scanner.

8.14 Life counter setting


This counter specifies the page count to ask operator to replace the consumable.

The background color of the counter on page 126 changes to yellow when the sheet count exceeds the value specified here. A message that prompts consumable replacement may also appear as described in Section "5.2 How to check and reset the Consumable/Cleaning Counter" on page 123.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Life Counter Alarm Setting] from its lower level.

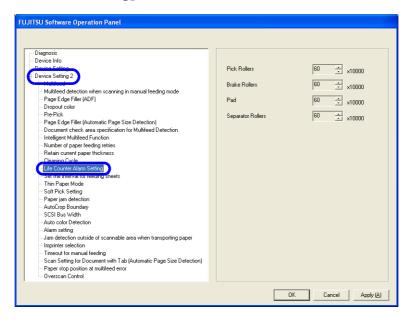

3. Specify the counter value to change its color for each consumable (Pick roller, Brake roller, Separartion pad, separator roller).

Setting is available from 10,000 to 2,550,000 with 10,000 increment.


8.15 Document clearance setting

Scanned image may be chipped at the bottom area, if the document is fed with large skew. This trouble can be avoided by setting the document clearance wider.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Set the interval for feeding sheets] from its lower level.

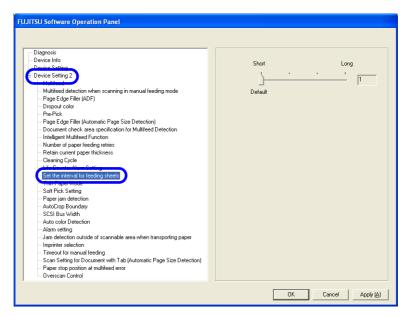

3. Select a document clearance from 4 steps from Short (Default) to Long.

8.16 Thin Paper Mode


If nonstandard thin paper cannot be fed and scanned smoothly, use this mode. In this mode, sheets of paper are fed at a slower speed so that thin paper can be fed and scanned properly.

Follow the steps below to switch to the Thin Mode.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Thin Paper Mode] from its lower level.

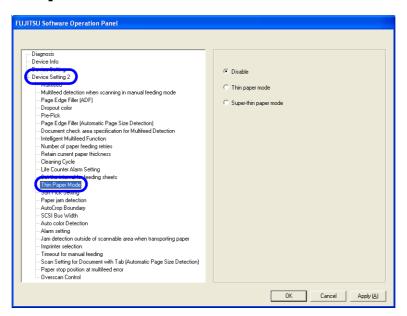

3. Select one of the following option.

Disable : For the document described in the Document specification.

Thin paper mode : For the thin document than described in the Document specification.

Super-thin paper : For very thin document rather than the Thin paper above.

mode



In Thin Paper Mode, the document is scanned at a lower speed, and thus it takes longer.

This mode should be used only for thin paper. Set the setting to "Disable" while you use paper of standard thickness.

About the paper thickness, refer to "7.2 Document Quality" on page 161.

8.17 Soft Pick Setting

When a number of sheets are picked at a time and multi-feed is detected frequently, enable this setting. When this setting is enabled, the pick roller does not move up and down at the paper picking to decrease the number of sheets at picking, and multi-feed may decrease.


This setting may be effective for the document in small size.



1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Soft Pick Setting] from its lower level.

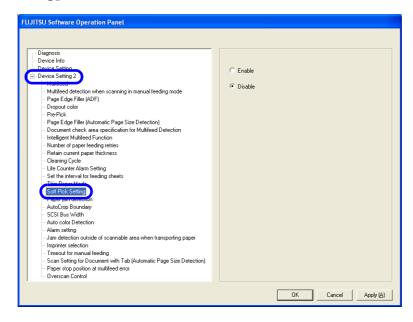

3. Specify whether to enable or disable Soft Pick Setting.

Default is "Disable".

8.18 Paper Jam Detection


You can set the degree of detection sensitivity for a jam at the feeder.

Configure the settings for Paper Jam Detection as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Paper jam detection] from its lower level.

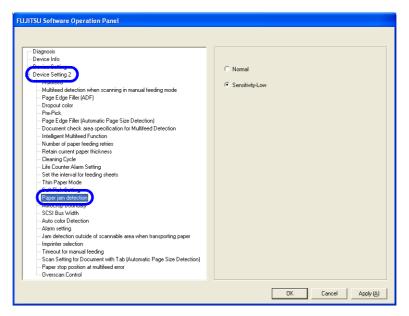

3. Set the degree of detection sensitivity for a jam occurred at the feeder.

If you encounter frequent jams, set the setting to "Sensitivity-Low".



Setting to "Sensitivity-Low" reduces the detection accuracy for a paper jam. If you don't want to get your important document ripped or crumpled, be sure to set the setting to "Normal" to scan the document.

8.19 AutoCrop Boundary


Scanning documents using the "Automatic Page Size Detection" function may produce incomplete image data; the edge of the image data may be lost, or shadows may be produced on the bottom or right edge of the data. To prevent or improve such a problem, use this "AutoCrop Boundary."

Configure the settings for the AutoCrop Boundary as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [AutoCrop Boundary] from its lower level.

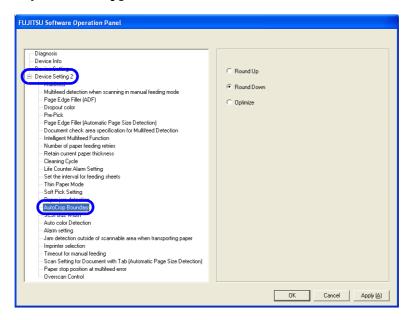

3. To prevent the output image from chipping during AutoCrop Boundary processing, select "Round Up", and select "Round Down" to delete unnecessary details.

To prevent the marginal data from being lost or minimize shadows on the bottom or right edge of the data during the AutoCrop Boundary processing, select [Optimize].



- When the document is scanned with "Round Down" selected, the characters in the vicinity of the rear end of the document, if any, may be cut out.
- Selecting "Round Up" can prevent data from chipping, but it may generate black lines near the rear end.
- Some applications may display scanned image data incorrectly when [Optimize] is selected. In such a case, select [Normal].
- For details on how to set the Automatic Page Size Detection setting, refer to "3.8 Correcting skewed Documents" on page 86.

8.20 Auto Color Detection


You can adjust the slice level for auto color detection.

Configure the settings for the Auto Color Detection as follows:

Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.


2. Select [Device Setting 2] from left side list in the window, and select [Auto color Detection] from its lower level.

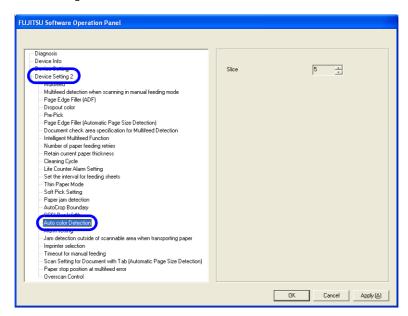

3. Select the Slice value.

You can select the Slice value from 1 to 255 (255 levels).

In the case that black and white documents are judged as color documents, select larger values. In the case that color documents are judged as black and white, select smaller values.



The auto color detection setting can be configured on the scanner driver setting window.

For details on how to set the setting, refer to "3.11 Color/monochrome Auto Detection" on page 94.

8.21 Alarm Setting


You can make the alarm to sound beeps when a jam or multifeed occurs, as well as disabling the alarm.

Configure the settings for the Alarm setting as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Alarm setting] from its lower level.

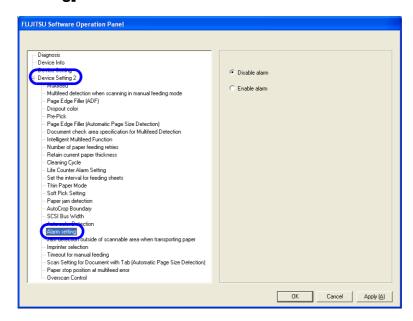

3. Select "Enable alarm" to sound beeps when a jam or multifeed occurs. Select "Disable alarm" to disable the alarm.

8.22 Jam Detection Outside of Scannable Area When Transporting paper


If this function is turned On, such a case, in which the documents are fed outside of the scannable area due to over-skew, is judged as a jam. You can turn it On and Off.

Configure the settings for the Jam detection outside of scannable area when transporting paper as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Jam detection outside of scannable area when transporting paper] from its lower level.

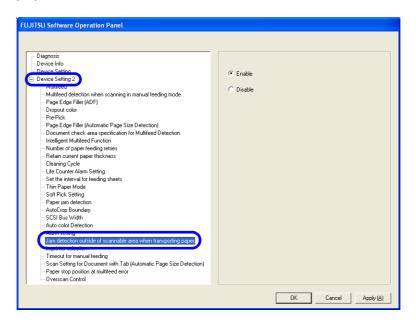

3. Select "Enable" to judge such a scan as a jam, and select "Disable" not to judge it as a jam.

8.23 Imprinter Selection


You can specify which imprinter to use; Pre-imprinter or Post-imprinter, if you already have installed these options.

Configure the settings for the Imprinter Selection as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Imprinter selection] from its lower level.

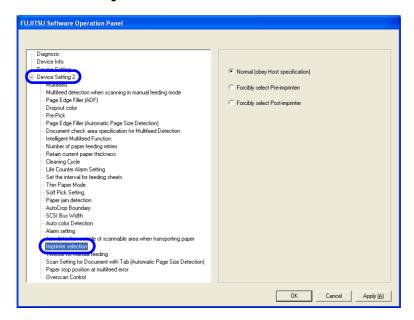

3. Select the Imprinter to use.

Normal (obey Host specification): Complies with the scanner driver setting.

Forcibly select Pre-imprinter : Pre-imprinter is forcibly used to print unless directed by

the scanner driver.

Forcibly select Post-imprinter : Post-imprinter is forcibly used to print unless directed by

the scanner driver.



For details on the specifications of the imprinter, refer to "9 OPTIONS" on page 225.

8.24 Timeout for Manual Feeding


In manual feeding mode, if the scanner is left without loading the next document to scan for an extended time period, the scanner completes the scanning once and cancel the manual feeding mode. The time period is called "timeout".

Configure the settings for the Timeout for Manual as follows:

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Timeout for manual feeding] from its lower level.

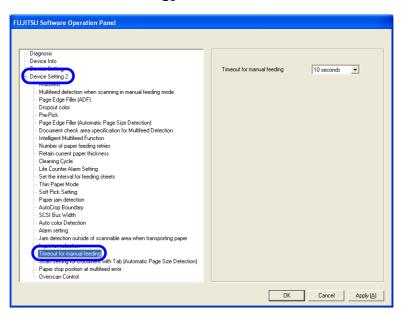


3. Select the timeout period for manual feeding.

You can specify the timeout period by seconds. Scanning will be complete when the specified time period has elapsed after the last sheet of paper was loaded onto the Hopper.

Select a timeout period from the following:

5, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 180, 240, 300, 360, 420, 480, 540, 600, 900, 1200, 1800, 1999 (seconds)



For details on how to scan the document manually, refer to "2.12 Feeding" Documents Manually" on page 36.


8.25 Scan Setting for Document with Tab

When the document has tab on the bottom edge of the image, the tab image remain even if the document is scanned with Automatic Page Size Detection. When "Scan Setting for Document with Tab" is specified, the tab image remains in the scanned data but the scanning speed may be rather slow.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

 Select [Device Setting 2] from left side list in the window, and select [Scan Setting for Document with Tab(Automatic Page Size Detection)] from its lower level.

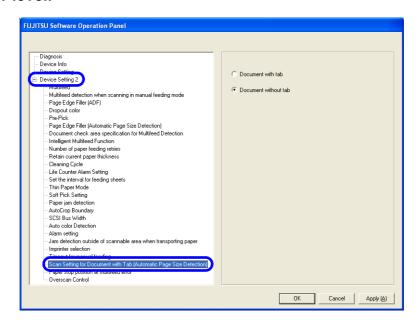


3. Specify whether the document is "Document with tab" or "Document without tab".

Default is "Document without tab".



When scanning the document with tab, load the document on the Hopper so that the tab is on the far side of the Pick roller. If the document is not loaded in this way, paper jam may occur as the tab is caught in ADF.

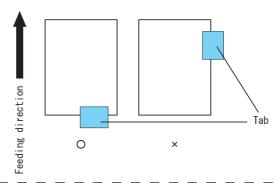

8.26 Paper Stop Position at Multifeed Error

When a multifeed error is detected by overlapping of documents, the position to stop the documents on which the multifeed occurred can be selected.


To configure this setting, [Check by overlapping (US sensor)] must be specified for multifeed detection ("8.4 Multifeed Detection" on page 193).

Configure the settings for Paper Stop Position at Multifeed Error as follows.

Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Paper stop position at multifeed error] from its lower level.

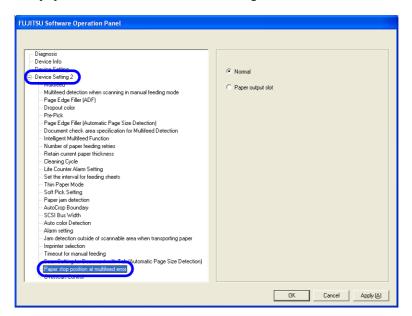

3. Select one of the following modes and click the [OK] button.

Normal : Stops feeding when a multifeed error is detected by overlapping.

Paper output slot : Feeds the documents to the Paper output slot and stops when a multi-


feed error is detected by overlapping.

This setting makes it easier to identify on which document a multifeed

error occurred.

8.27 Overscan Control

Specify [Optimize] when you use Overscan and the image is partially missing due to an abnormal skew. You can detect abnormal image skew and set sufficient amount of black margins on the top and the bottom so that the whole image is contained.

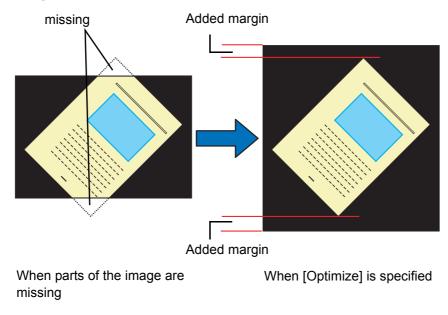


Configure the settings for Overscan Control as follows.

1. Start up the Software Operation Panel.

Refer to "8.1 Scanner Settings" on page 175.

2. Select [Device Setting 2] from left side list in the window, and select [Overscan Control] from its lower level.

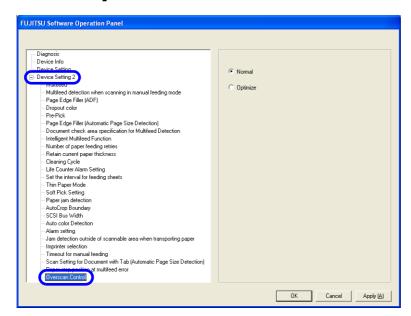

3. Select [Optimize].



- It is recommended to use Overscan together with "8.15 Document clearance setting" on page 210 (The scanning speed slows down when you select this function).
- The scanning speed may slow down depending on the paper size of the documents you scan.



When you scan using Overscan, specify a larger size than the actual document size and scan.

9 OPTIONS

This chapter describes options for fi-5950.

9.1 Options226	3
9.2 fi-590PRF (Pre-imprinter)227	7
9.3 fi-590PRB (Post-imprinter)228	3
9.4 Other Options229	<u> </u>

9.1 Options

The following lists options available for the scanner.

Name	Part No.	Description
fi-590PRF Pre-Imprinter	PA03450-D700	Prints an alphanumerical string on the document to be scanned. The printing is done on the front side of the document and before it is scanned. As a result, both the document and the generated image will bear the same string of your choice (name, date, serial number etc.) for archiving.
fi-590PRB Post-Imprinter	PA03450-D710	Prints an alphanumerical string on the document scanned. The printing is done on the back side of the document and after it is scanned. Only the document will bear the string of your choice (name, date, serial number etc.).
fi-595CGA VRS option (Kofax VRS (optional))	PA03450-K171	An image processing hardware option for FUJITSU image scanner fi-series. Combined use of this with dedicated application "Kofax VRS Professional" achieves advanced image processing at a high speed.

For the details, contact FUJITSU scanner dealer where you purchased the scanner or FUJITSU group company responsible for your country.



Both imprinters can be installed on the scanner at the same time. However, only one of them can print at a time.

Select the appropriate imprinter depending on your needs,.

9.2 fi-590PRF (Pre-imprinter)

fi-590PRF is installed at the front side of the Transport path, inside of the scanner. It prints prior to scanning. fi-590PRF (Pre-imprinter) specifications are described below.

Item	Descriptions		
Printing Method	Thermal Ink Jet		
Printable characters	Alphabet letters: A to Z, a to z Numeric characters: 0,1 to 9 Symbols: ! " # \$ % & ' () * + , / : ; < = > ? @ [\]^_`{ }^		
Maximum printable characters per line	43 characters		
Print Orientation	Normal: 0°, 180° (horizontal), 90°, 270° (vertical) Narrow: 0°, 180° (horizontal)		
Character size	Normal: Height 2.91mm × width 3.03mm / 0.1146 × 0.1193 in (horizontal) Height 3.03mm × width 2.91mm / 0.1193 × 0.1146 in (vertical) Narrow: Height 2.91mm × width 1.71mm / 0.1146 × 0.0673 in (horizontal)		
Character pitch	3.79mm / 0.1492in (Normal), 2.46mm /0.0968in (Narrow)		
Font Style	Regular, Bold		
Character Width	Normal, Narrow		
Printing area	Preprinting area (from in the illustration). Therefore, correct printing operations in such areas are not guaranteed.		
Printing Position Accuracy	Vertical: ±4mm Horizontal: ±4mm		
Consumables	Print Cartridge		

As for the operations and functions of fi-590PRF (Pre-imprinter), refer to the fi-590PRF Operator's Guide attached to fi-590PRF.

9.3 fi-590PRB (Post-imprinter)

fi-590PRB is installed at the rear side of the Transport path, inside of the scanner. It prints after the scanning. fi-590PRB (Post-imprinter) Specifications are described below.

Item	Descriptions			
Printing Method	Thermal Ink Jet			
Printable characters	Alphabet letters: A to Z, a to z Numeric characters: 0,1 to 9 Symbols: ! "#\$% & '()*+,/:;<=>?@[\]^_`{ }			
Maximum printable characters per line	43 characters			
Print Orientation	Normal: 0°, 180° (horizontal), 90°, 270° (vertical) Narrow: 0°, 180° (horizontal)			
Character size	Normal: Height 2.91mm × width 3.03mm / 0.1146 × 0.1193 in (horizontal) Height 3.03mm × width 2.91mm / 0.1193 × 0.1146 in (vertical) Narrow: Height 2.91mm × width 1.71mm / 0.1146 × 0.0673 in (horizontal)			
Character pitch	3.79mm / 0.1492in (Normal), 2.46mm /0.0968in (Narrow)			
Font Style	Regular, Bold			
Character Width	Normal, Narrow			
Printing area	Head movable range Point Postpining area (back side) Unit: mm * The document stains with ink when printing in the shaded areas (shown in the illustration). Therefore, correct printing operations in such areas are not guaranteed.			
Printing Position Accuracy	Vertical: ±4mm Horizontal: ±4mm			
Consumables	Print Cartridge			

As for the operations and functions of fi-590PRB (Post-imprinter), refer to the fi-590PRB Operator's Guide attached to fi-590PRB.

9.4 Other Options


Extended Memory

Increasing memory is an effective way to improve the scanner's processing speed when scanning at high resolutions. (For example, this may prevent the scanner from pausing when scanning double-sided color A3 documents at resolutions higher than 400 dpi).




Before you install extended memory, please first touch metal objects to release static.

- 1. Switch off the scanner's main power switch, unplug all connecting
- 2. Unscrew the back cover of the scanner and take it off.

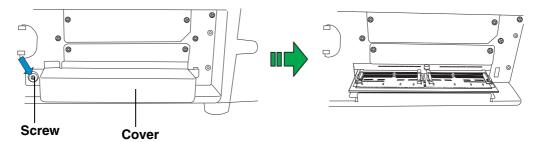

3. Insert the memory into the slot, and push down the module until it locks in position.

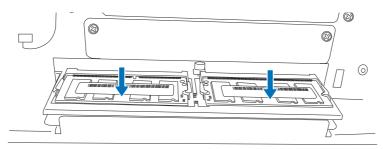

4. Put back the cover and tighten the screw. The memory listed below is recommended. Two modules of the same specification must be installed at the same time.

The memory modules are not provided with the scanner.

Memory type: 144-pin Unbuffered DODIMM

Manufacturer	Model	Size
Micron Technology	MT8LSDT3264HY-133D2	256MB



The scanner may not function properly if two modules of different types are installed at the same time.



You can confirm whether the memory modules are installed properly or not through the [Software Operation Panel]:

Click the [Device Setting] tab and check the value of scanner memory under "Standard Information". (Default: 512MB)

10 SCANNER SPECIFICATIONS

This chapter describes the Scanner Specifications.

10.1 Basic Product Specifications	232
10.2 Installation Specifications	234
I0.3 Dimensions	236

10.1 Basic Product Specifications

1	Scanner Type		ADF (Automatic Document Feeder) and Manual feed		-
2	Image sensor		Color CCD × 2		Front/Back
3	Light source		Incandescent cold cathode fluorescent lamp		Front/Back
4	Scanning area	Minimum	53 mm × 74 min.	m, 2.1 in. × 2.9	-
		Maximum	304.8 × 431.8	mm, 12 × 17 in.	-
5	Document thicknes	s	31 g/m ² to 209	g/m ²	(* 1)
6	Scanning speed		Simplex ppm	Duplex ipm	(* 3) Grayscale, Color
	(A4 Portrait) (* 2)	200 dpi	105	210	†
	Binary (Black and White)	300 dpi	105	210	†
	Grayscale	400 dpi	60	120	
	Color	600 dpi	30	60	
7	ADF capacity (* 4)		500 sheets		80 g/m ² (Hopper set to lower position)
8	Optical resolution		600 dpi		-
9	9 Output resolution	Binary (Black and White)	50 to 600 dpi		scalable in steps of 1 dpi
		Grayscale	50 to 600 dpi		†
		Color	50 to 600 dpi		
10	Grayscale level 8 b		8 bits for each	color	10 bits/color during internal processing
11	Output mode of hal	ftone patterns	Dither/Error dif	fusion	-
12	Interface (* 5)		USB 2.0/1.1(* 6)		B type
)	Shielded, 68 pin half density (High Density DB68)
13	Other functions		JPEG compression		-
14	Option	Imprinter	fi-590PRF/fi-590 PRB		(* 8)
	VRS option fi-595CGA			-	


- (* 1) For details, refer to "7.2 Document Quality" on page 161.
- (* 2) The scanning speed is the maximum speed of the scanner hardware. The actual speed may be slower due to the system overhead such as data transfer time.
- (* 3) With JPEG compression enabled
- (* 4) The maximum capacity varies depending on the document thickness. Refer to "7.3 Maximum Document Loading Capacity" on page 164.
- (* 5) The SCSI and USB interface cannot be used together.
- (* 6) When using USB 2.0, you have to use a port compatible to USB 2.0. When connecting to USB 1.1, the scanning speed will decrease.
- (* 7) Avoid connecting other SCSI devices to the same bus. It can reduce the scanner throughput.
- (* 8) You can imprint alphabetic characters and number on the scanned document. The fi-590PRF (pre-imprinter) will print prior to scanning on the front side of the document. The fi-590PRB (post-imprinter) will print after the scanning on the back side of the document.
 - You can install both the fi-590PRF and fi-590PRB, but you cannot use them at the same time.


10.2 Installation Specifications


Item		Specification			
Dimensions		Depth	Width	Height	
(With nopper and	stacker retracted)	540 mm, 21 in	540 mm, 21 in	500 mm, 20 in	
Space requirements		200 mm (7.874 in		200 mm (7.874 in)	
Weight (kg)		50 kg (110.4lb)			
Input power	Voltage	AC100 - 240 V±10%			
	Phase	Single-phase			
	Frequency	50/60 Hz ±3Hz			
Power	Operating	250 W or less			
consumption	Power saving	3.2 W or less			
	Power-off	less than 0.5 W			


Ambient condition	Device status	Operating	Not operating	
	Temperature	15 to 35 degrees Celsius 59 to 95 degrees Fahrenheit	-20 to +60 degrees Celsius -4 to +140 degrees Fahrenheit	
	Humidity	20 - 80%	8 - 95%	
Heat capacity	Operating	216 kcal/Hr or less		
	Not operating	113 kcal/Hr or less		
	Power Saving	less than 2.8 kcal/Hr		
	Power-off	less than 0.43 kcal/Hr		
Total Package Weight (kg)		70		

10.3 Dimensions





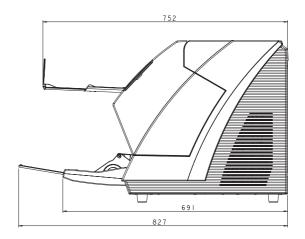



unit: mm

INDEX

A	Job separation sheet16	9
ADF cover open button2	Precautions16	2
Alarm Setting216	Document jams13	6
Auto Color Detection	Document smoother	4
AutoCrop Boundary214	Document thickness	5
Autoorop Boundary214	Dropout Color20	1
В		
Basic Operations	E	
Inserting documents36	Ejector	2
Lifting/lowering hopper10		
Loading documents17	F	
Power on 8	fi-590PRB226, 22	8
Scanning documents30	fi-590PRF226, 22	
Basic Scanner Operations7	fi-595CGA22	
Brake roller	Function Number display	
Brake roller unit	i director ridinicor diopidy	_
	Н	
C	Hopper2, 10, 1	7
Cleaner F1106	Hopper extension	
Cleaning	Hopper height adjustment button	
Pad108	How to use the Scanner Driver4	
Cleaning materials106	Tiow to use the Scarnier Briver	J
Cleaning sheet106	I	
Consumable	lesso sinto y Colontina	O
Abrasion counters123	Imprinter Selection21	ð
Consumables 122	Installation Specifications Ambient condition23	5
Replacement cycle122	Dimensions23	
Correcting the skewed Documents 86	Input power23	
	Power consumption23	
D	Space requirements23	
Daily Care105	Weight23	
Detecting Double-Feeds84	ISIS Driver4	
Dimensions 234, 236	10.0 2.1.0	•
Document	J	
Document quality161	Jam Detection Outside of Scannable	
Document size160	Area When Transporting21	
Document thickness161	7.102 T	•
Document type161		
Grounding color area168		
Hole-punching, area165		

L	SCSI ID Switch	3
Labels on the scanner	Send to button	5
Lifting or lowering the hopper 10	Separation roller	. 107
Ziming of to nothing the hopper	Separator roller	4
M	Service provider	. 155
Main power switch 3	Side guide	2
Manual Feed Mode36	Side guides	18
Multifeed detection	Skipping blank Pages	78
Waltifeed detection	Specifications	. 232
0	ADF capacity	. 232
•	Document thickness	. 232
Offset	Grayscale level	. 232
Operator panel2	Image sensor	
_	Interface	. 232
Р	Light source	
Pad4, 107, 108	Optical resolution	
Pad ASSY127	Other functions	
Page Edge Filler (ADF)199	Output mode	
Paper Jam Detection213	Output resolution	
Paper weight164	Scanner Type	
Pick roller4, 37, 112, 128	Scanning area	
Power button	Scanning speed	
Power on 8	Stacker extension	
Power saving 190	Stopper2, 22, 23	3, 26
Pre-Pick	-	
	Т	
R	Thin Paper Mode	
Replacing	Timeout for Manual Feeding	. 219
Brake roller133	TWAIN Driver	43
Brake roller unit130		
Pad ASSY 127		
Pick roller 128		
S		
Scan button5		
Scanner Settings 175		
Scanner Specifications		
Scanning documents		
Different-size72		
Dropout color75		

fi-5950 Image Scanner Operator's Guide

P3PC-3052-03ENZ0

Issue date: July, 2013 Issueed by: PFU LIMITED

- •Copying of the contents of this manual in whole or in part and copying of the scanner application is forbidden under the copyright law.
- •The contents of this manual are subject to change without notice.
- •PFU LIMITED assumes no liability for incidental or consequential damages arising from the use of this manual, and any claims by a third party.