


INSTRUCTION SHEET
LD SERIES
LCD MONITORING DESK ADD-A-BAY

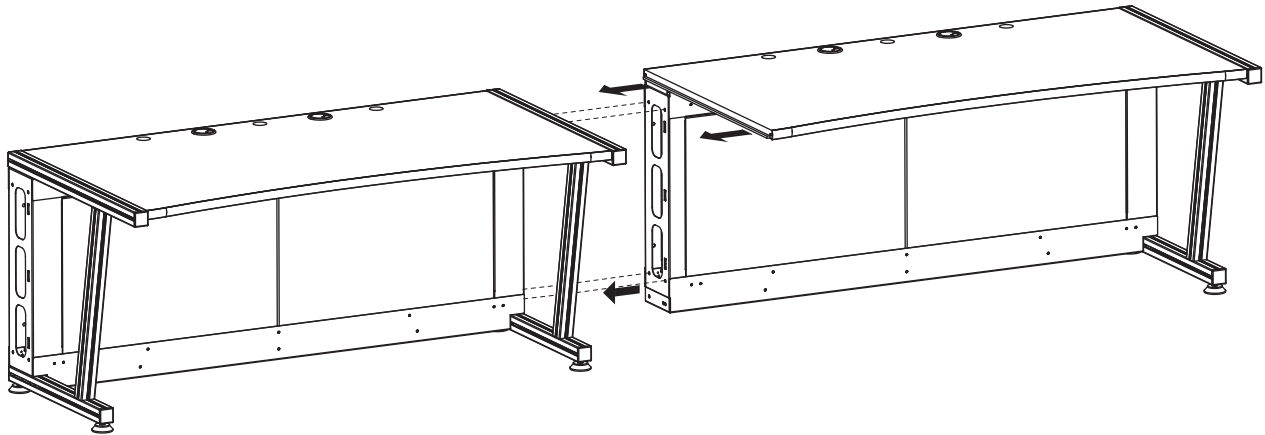

THANK YOU

Thank you for purchasing the LCD Monitoring Desk Add A-Bay. Please read these instructions thoroughly before installing / assembling this product.

PRODUCT FEATURES

- Add-A-Bay™ desks provide economical expansion of LCD Monitoring / Command Desk
- Cable pass-throughs for hiding cables between desks
- Power distribution and cable management cabinet features
- Integral front and rear doors for easy access

ASSEMBLY

Carefully remove all contents from crate before beginning assembly.

- 1) Lay desktop upside down on flat surface. Using the 2 screws provided, attach cabinet to work surface. Do not tighten.

(FIGURE A)

NOTE: Bottom of desktop has mounting holes for accessories. Bottom of cabinet does not have mounting holes. Cabinet direction is correct when grommet holes and mounting holes on cabinet line up with grommet holes and mounting holes on desktop.

TIP: Remove doors from cabinet during assembly.

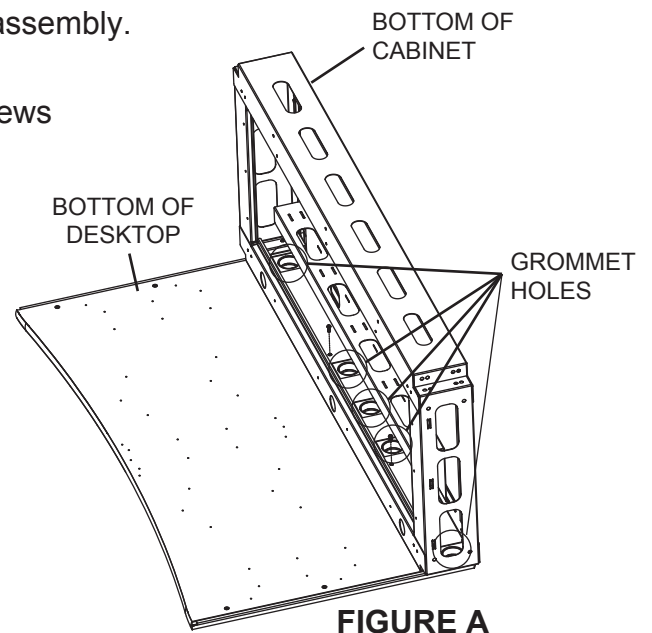


FIGURE A

- 2) Attach toe kick to cabinet by using 3 screws provided. **(FIGURE B)**

- 3) Attach leg to right side of desktop by installing 4 screws into leg from inside of cabinet. (2 on top, 2 on bottom) **(FIGURE C)**

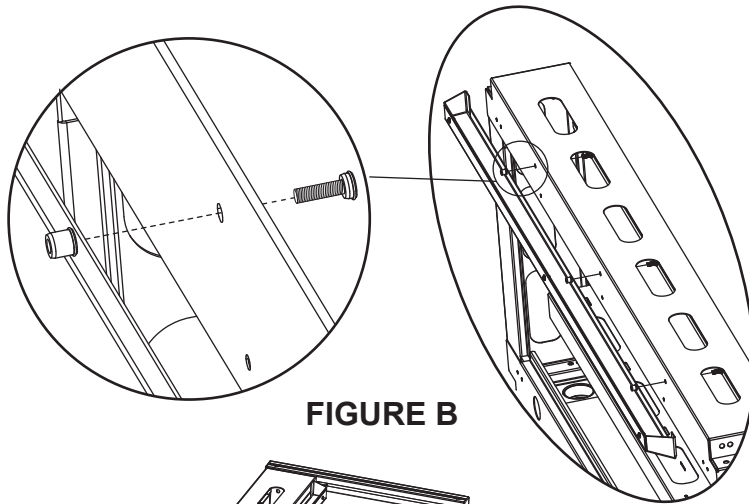


FIGURE B


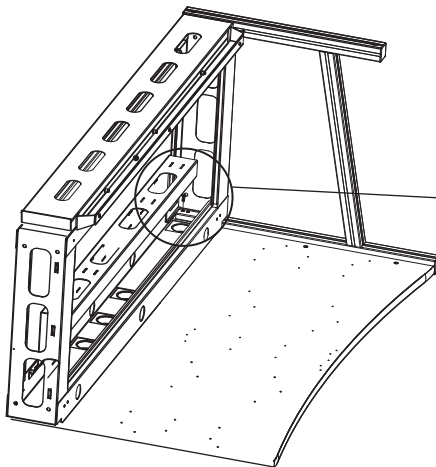


FIGURE C

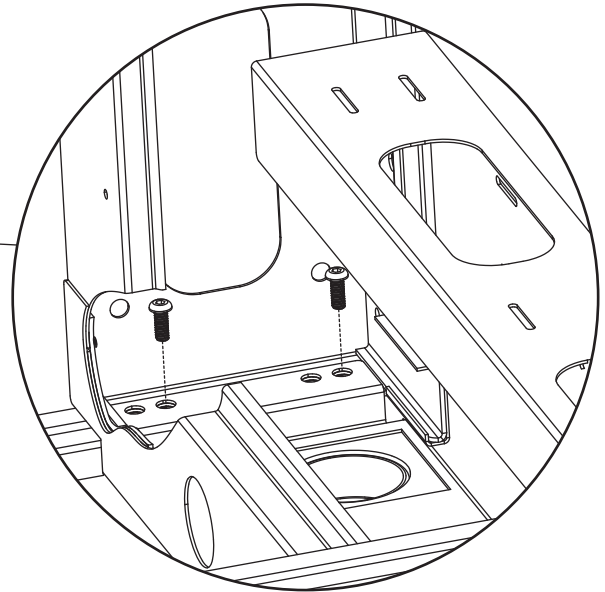

- 4) Remove support bracket from right side of standard (non add-a-bay) desk. Using screws provided, attach dual support bracket to right side of desk. Do not tighten. **(FIGURE D)**

NOTE: Sliding nut needs to be lined up with holes in support bracket in order to attach. Serrated side faces out from inside of channel.

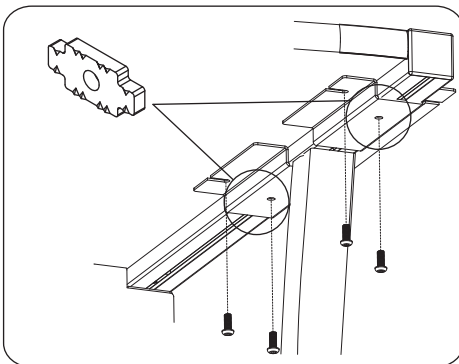


FIGURE D

5) Install leveling feet by screwing into bottom of leg. **(FIGURE E)**

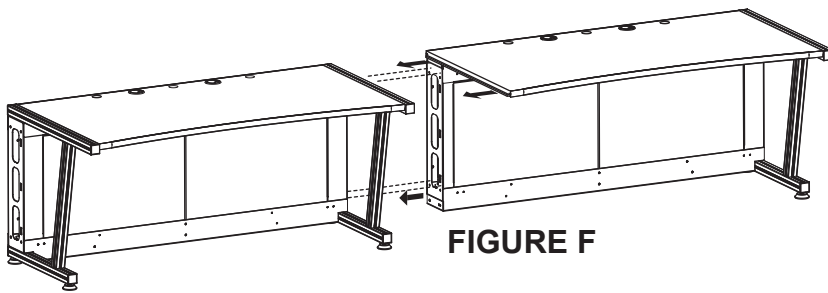


FIGURE F

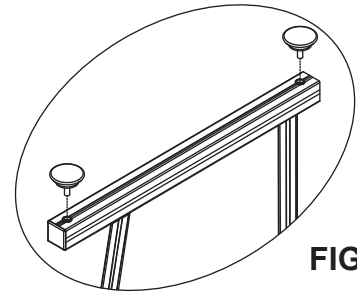


FIGURE E

6) Carefully turn desk over and using 4 screws provided, connect add-a-bay to desk. Push desks together to close gap. **(FIGURE F)**

7) Check alignment and tighten all screws.

NOTE: For ease of installation, keep desk flipped over until assembly of desk and accessories is complete.

8) Grommet can be removed from rear of desk to run cables out of cabinet. To remove, take doors off cabinet and squeeze inside of grommet and pop out. **(FIGURE G)**

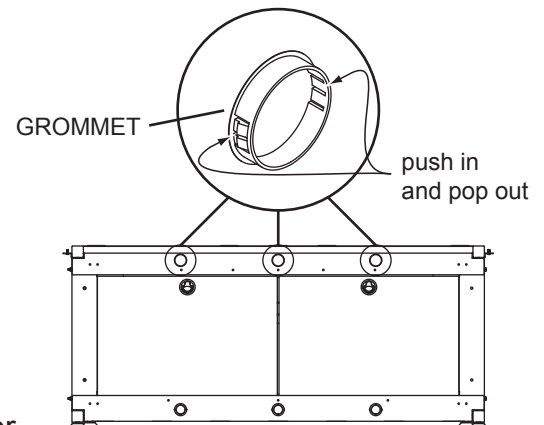



FIGURE G

Installation of Optional Power Strip (Sold Separately)


NOTE: Disregard instruction sheet that came with power strip and follow the instructions below.

Middle Atlantic Products recommends the use of the PD-815SC or PD-815SC-NS slim 8 outlet power strip with the LCD monitoring desk. The desk has been optimized to accommodate up to 2 power strips.

1) Install mounting brackets with screws included with PD-815SC or PD-815SC-NS power strip using acorn nuts included with desk as shown below.

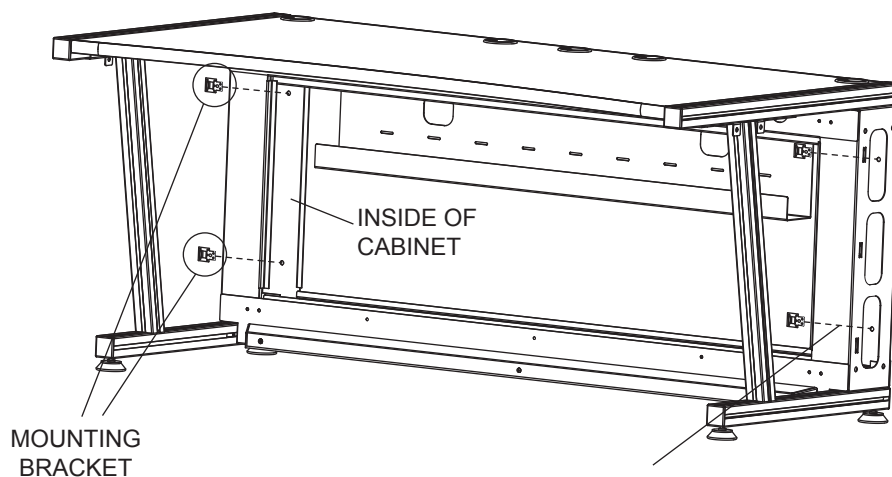

TIP: Mount power on right side of desk when light bridge is being used.

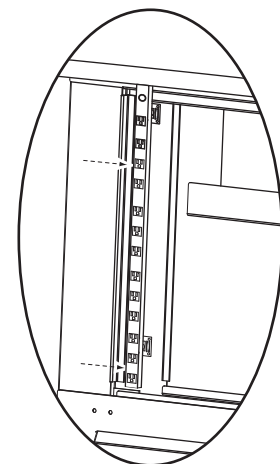

2) Attach power strip to mounting bracket by snapping in place.

WARRANTY

Middle Atlantic Products (the "Company") warrants the LCD Monitoring Desk Add-A-Bay to be free from defects in material or workmanship under normal use and conditions for a period of (7) seven years from date of shipment by the Company.

The Company's entire liability to the purchaser, and the purchaser's (or any other party's) sole and exclusive remedy, under this warranty shall be limited, at the Company's option, to either (a) return of and refund of the price paid for, or (b) repair or replacement at the Company's factory of the products purchased, or any part or parts thereof, which the Company has determined to be defective after inspection thereof at the Company's factory.

This warranty does not cover damage due to acts of God, accident, misuse, abuse or negligence by parties other than the Company, or any modification or alteration of the products. In addition, this warranty does not cover damage due to improper handling, assembly, installation or maintenance.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL THE COMPANY BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF THE PRODUCTS PURCHASED, EVEN IF THE COMPANY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE COMPANY'S LIABILITY TO THE PURCHASER (OR ANY OTHER PARTY) HEREUNDER, IF ANY, SHALL IN NO EVENT EXCEED THE PURCHASE PRICE OF THE PRODUCTS PAID TO THE COMPANY.

Corporate Headquarters

Corporate Voice 973-839-1011 - Fax 973-839-1976
International Voice +1 973-839-8821 - Fax +1 973-839-4982
middleatlantic.com - info@middleatlantic.com

Middle Atlantic Canada

Voice 613-836-2501 - Fax 613-836-2690
middleatlantic.ca - customerservicecanada@middleatlantic.ca

Factory Distribution

USA: NJ - CA - IL Canada: ON - BC

At Middle Atlantic Products we are always listening. Your comments are welcome.

Middle Atlantic Products is an ISO 9001 and ISO 14001 Registered Company.

