

WARNING: DIRECT OBSERVATION OF THE SUN CAN CAUSE HARM
DAMAGE TO YOUR EYES. NEVER LOOK DIRECTLY AT THE SUN EITHER
THROUGH A TELESCOPIC SIGHT OR WITH THE NAKED EYE.

WARNING: INSTALL THE INSTRUMENT ONLY WHEN THE WEAPON IS
UNLOADED. ENSURE THAT THE SAFETY PROCEDURES RELATIVE TO THE
HANDLING OF FIREARMS ARE ALWAYS FOLLOWED TO THE LETTER.

MONTAGE: Unscrew the two screws on the side of
the instrument (5), set the rail onto the base, align
and seat the crossboil of the ring into the cross cut
grooves of the base. Tighten each crossboil with a
screwdriver.

RECHARGEABLE BATTERY: This instrument is provided
of a charging cable to be attached to the electric
power. Please connect the charging cable to the
instrument when you want to charge it.

ZEROING:


WARNING: SINCE ZEROING INVOLVES ACTUAL SHOOTING OF LIVE
ROUNDS, IT SHOULD BE DONE AT AN APPROVED RANGE OR EQUALLY SAFE
AREA. BE SURE TO USE EYES AND EAR PROTECTION WHEN SHOOTING.

Activate the green reticle pressing button 1.

Activate the red reticle pressing button 2.

Select the reticle pattern by turning the Selector
Knob (6).

With the scope leveled and mounted, rest the gun
on a solid support. Sight along the barrel and aim at
a target 50 to 100 yards away. Sight through your
red/green dot sight and use the windage (3) and
elevation (4) adjustments to align the lighted red dot
with the target as seen along the barrel. Fire three
rounds at the target. Note the points of impact on the
target. Find the center of the three round group and
adjust the windage and elevation dials accordingly
to move the point of impact onto the center of the
target. Repeat this process if necessary. Each
click adjustment moves the point of impact 1 MOA
(approximately 1" at 100yds, 1/2" at 50 yards)

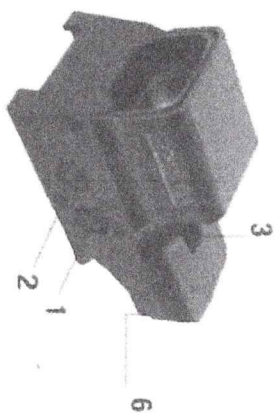

INSTRUCTIONS



MULTI-RETICLE RED/GREEN DOT
SIGHTPRO-RR

www.konus.com
www.konuspro.com

